
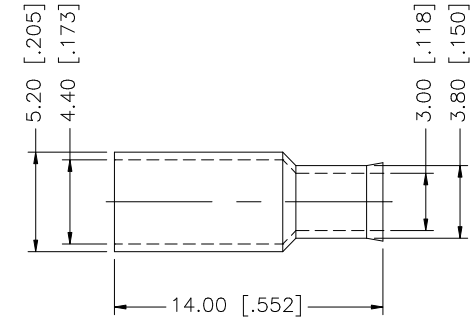
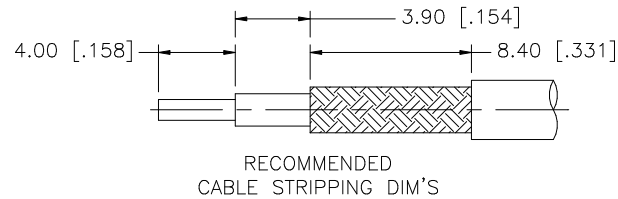
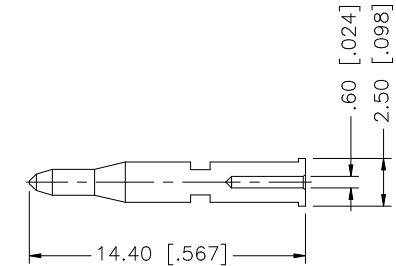
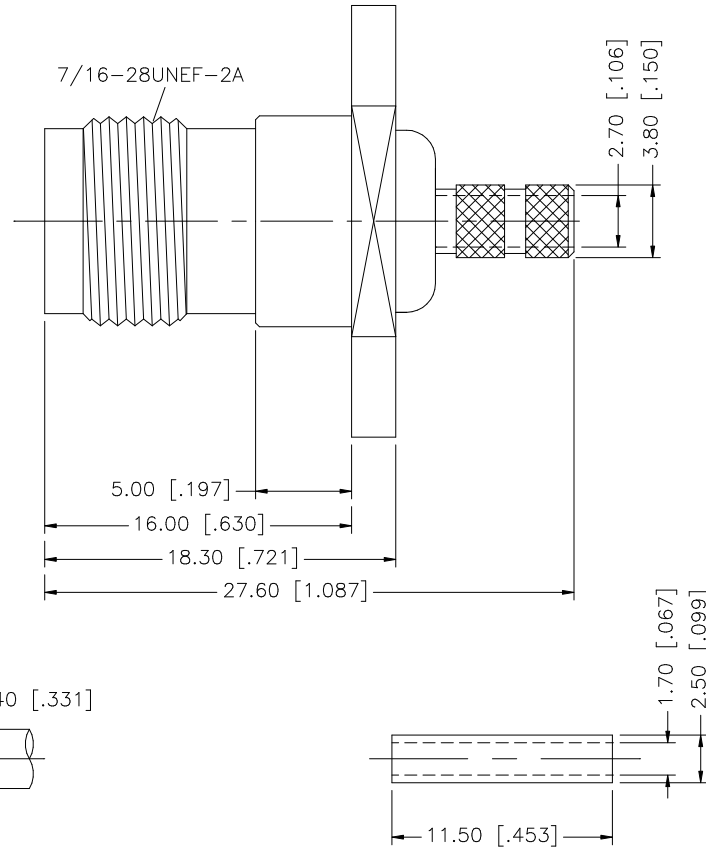


REV.	DATE	DESCRIPTION
NC	09/05/00	INITIAL RELEASE
A	10/02/06	UPDATE DRAWING FORMAT

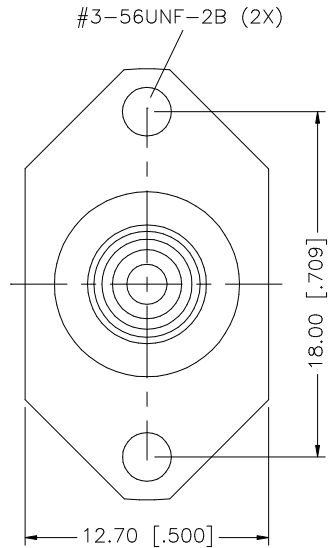

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex									
8						DRAWN	G.R.S.	10/02/06											
7						CHECKED				PART DESCRIPTION TNC REVERSE POLARITY CRIMP JACK, 2 HOLE PANEL (FOR RG-174/U, 188A/U, 316/U CABLE)									
6						ISSUED													
5						SHEET	1 OF 1				PART NO. 122458RP								
4	FERRULE	COPPER	NICKEL	1	CAD FILE C:/122/122458RP.DWG				DWG. NO.						122458RP.DWG		REV.	A	SIZE
3	CONTACT PIN	PHOS. BRONZE	GOLD	1															
2	INSULATOR	TEFLON	NATURAL	1															
1	BODY	BRASS	NICKEL	1															
DESCRIPTION					MATERIAL	FINISH	QTY												

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122458RP](#)