



E

D

C


B

A

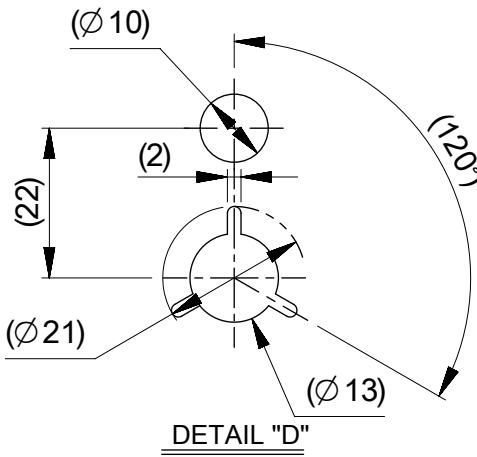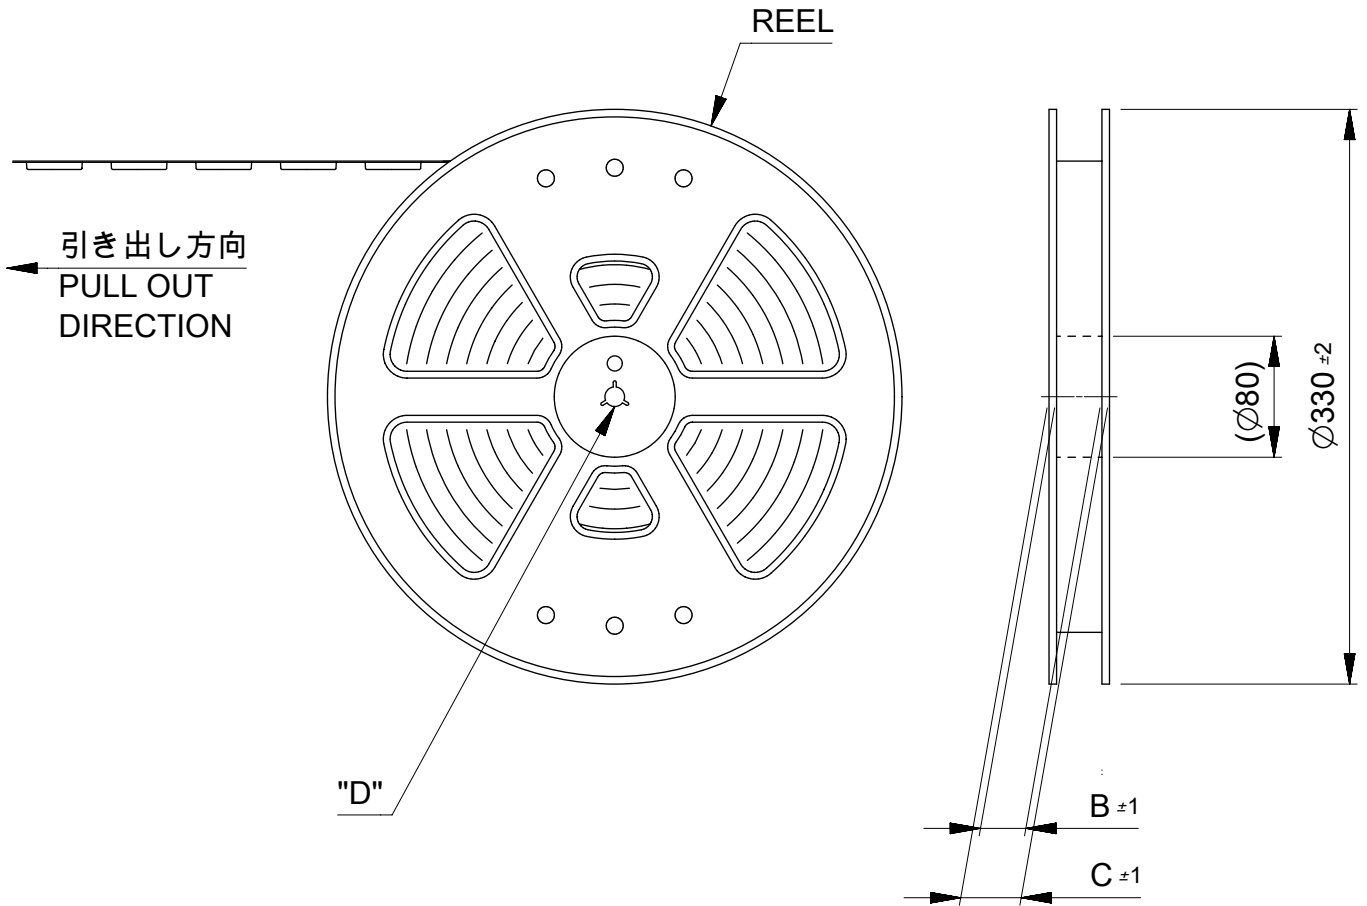


注記 NOTES

1. 製品詳細寸法については製品単体図面を参照下さい。
RE DETAILED DIMENSION, SEE PRODUCT DRAWING.
2. 梱包数量：3000個/リール
NUMBER OF CONNECTORS：3000PCS/REEL
3. リードテープ長さ
LEAD TAPE LENGTH
4. カバーテープの剥離強度については、IEC60286-3に準拠
COVER TAPE PEEL FORCE IS DEFINED BY IEC60286-3.
5. 材料 MATERIAL
キャリアテープ (CARRIER TAPE)：ポリスチレン (POLYSTYRENE)
トップテープ (TOP TAPE)：PET,OTHER
リール (REEL)：ポリスチレン (PS) <リサイクル材を含む>
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED >
6. 1リール/3000個内において、欠品はなきこと
THERE SHALL BE NO MISSING PRODUCT.
7. ELV及びRoHS適合品
ELV AND RoHS COMPLIANT.

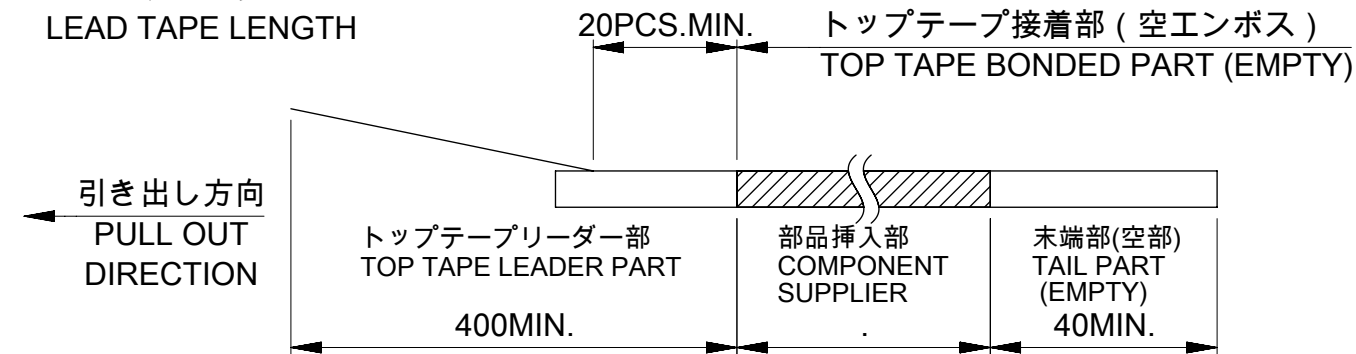

EC NO: 108474 DRWN: JFURUKAWA CHK'D: TASAKAWA REV APPR: TKUSUHARA01		GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 3.0 ° 4 PLACES ± 0.03 3 PLACES ± 0.03 2 PLACES ± 0.05 1 PLACE ± 0.1 0 PLACES ± 0.2 DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DIMENSION UNITS	SCALE	MODEL No. 503304-**40 molex® 0.4 BB CONN. H=0.7 REC. ASSY EMBSTP PKG			
				MM	1:1				
				DRWN BY	DATE	PRODUCT CUSTOMER DRAWING			
				JFURUKAWA	2016/02/01				
				CHK'D BY	DATE	SERIES MATERIAL NUMBER CUSTOMER			
				TASAKAWA	2016/10/24				
				APPR BY	DATE				
A		REV		DRAWING SIZE	THIRD ANGLE PROJECTION	DOCUMENT NUMBER DOC TYPE DOC PART SHEET NUMBER			
				A3		5033040000 PSD 000 1 OF 3			

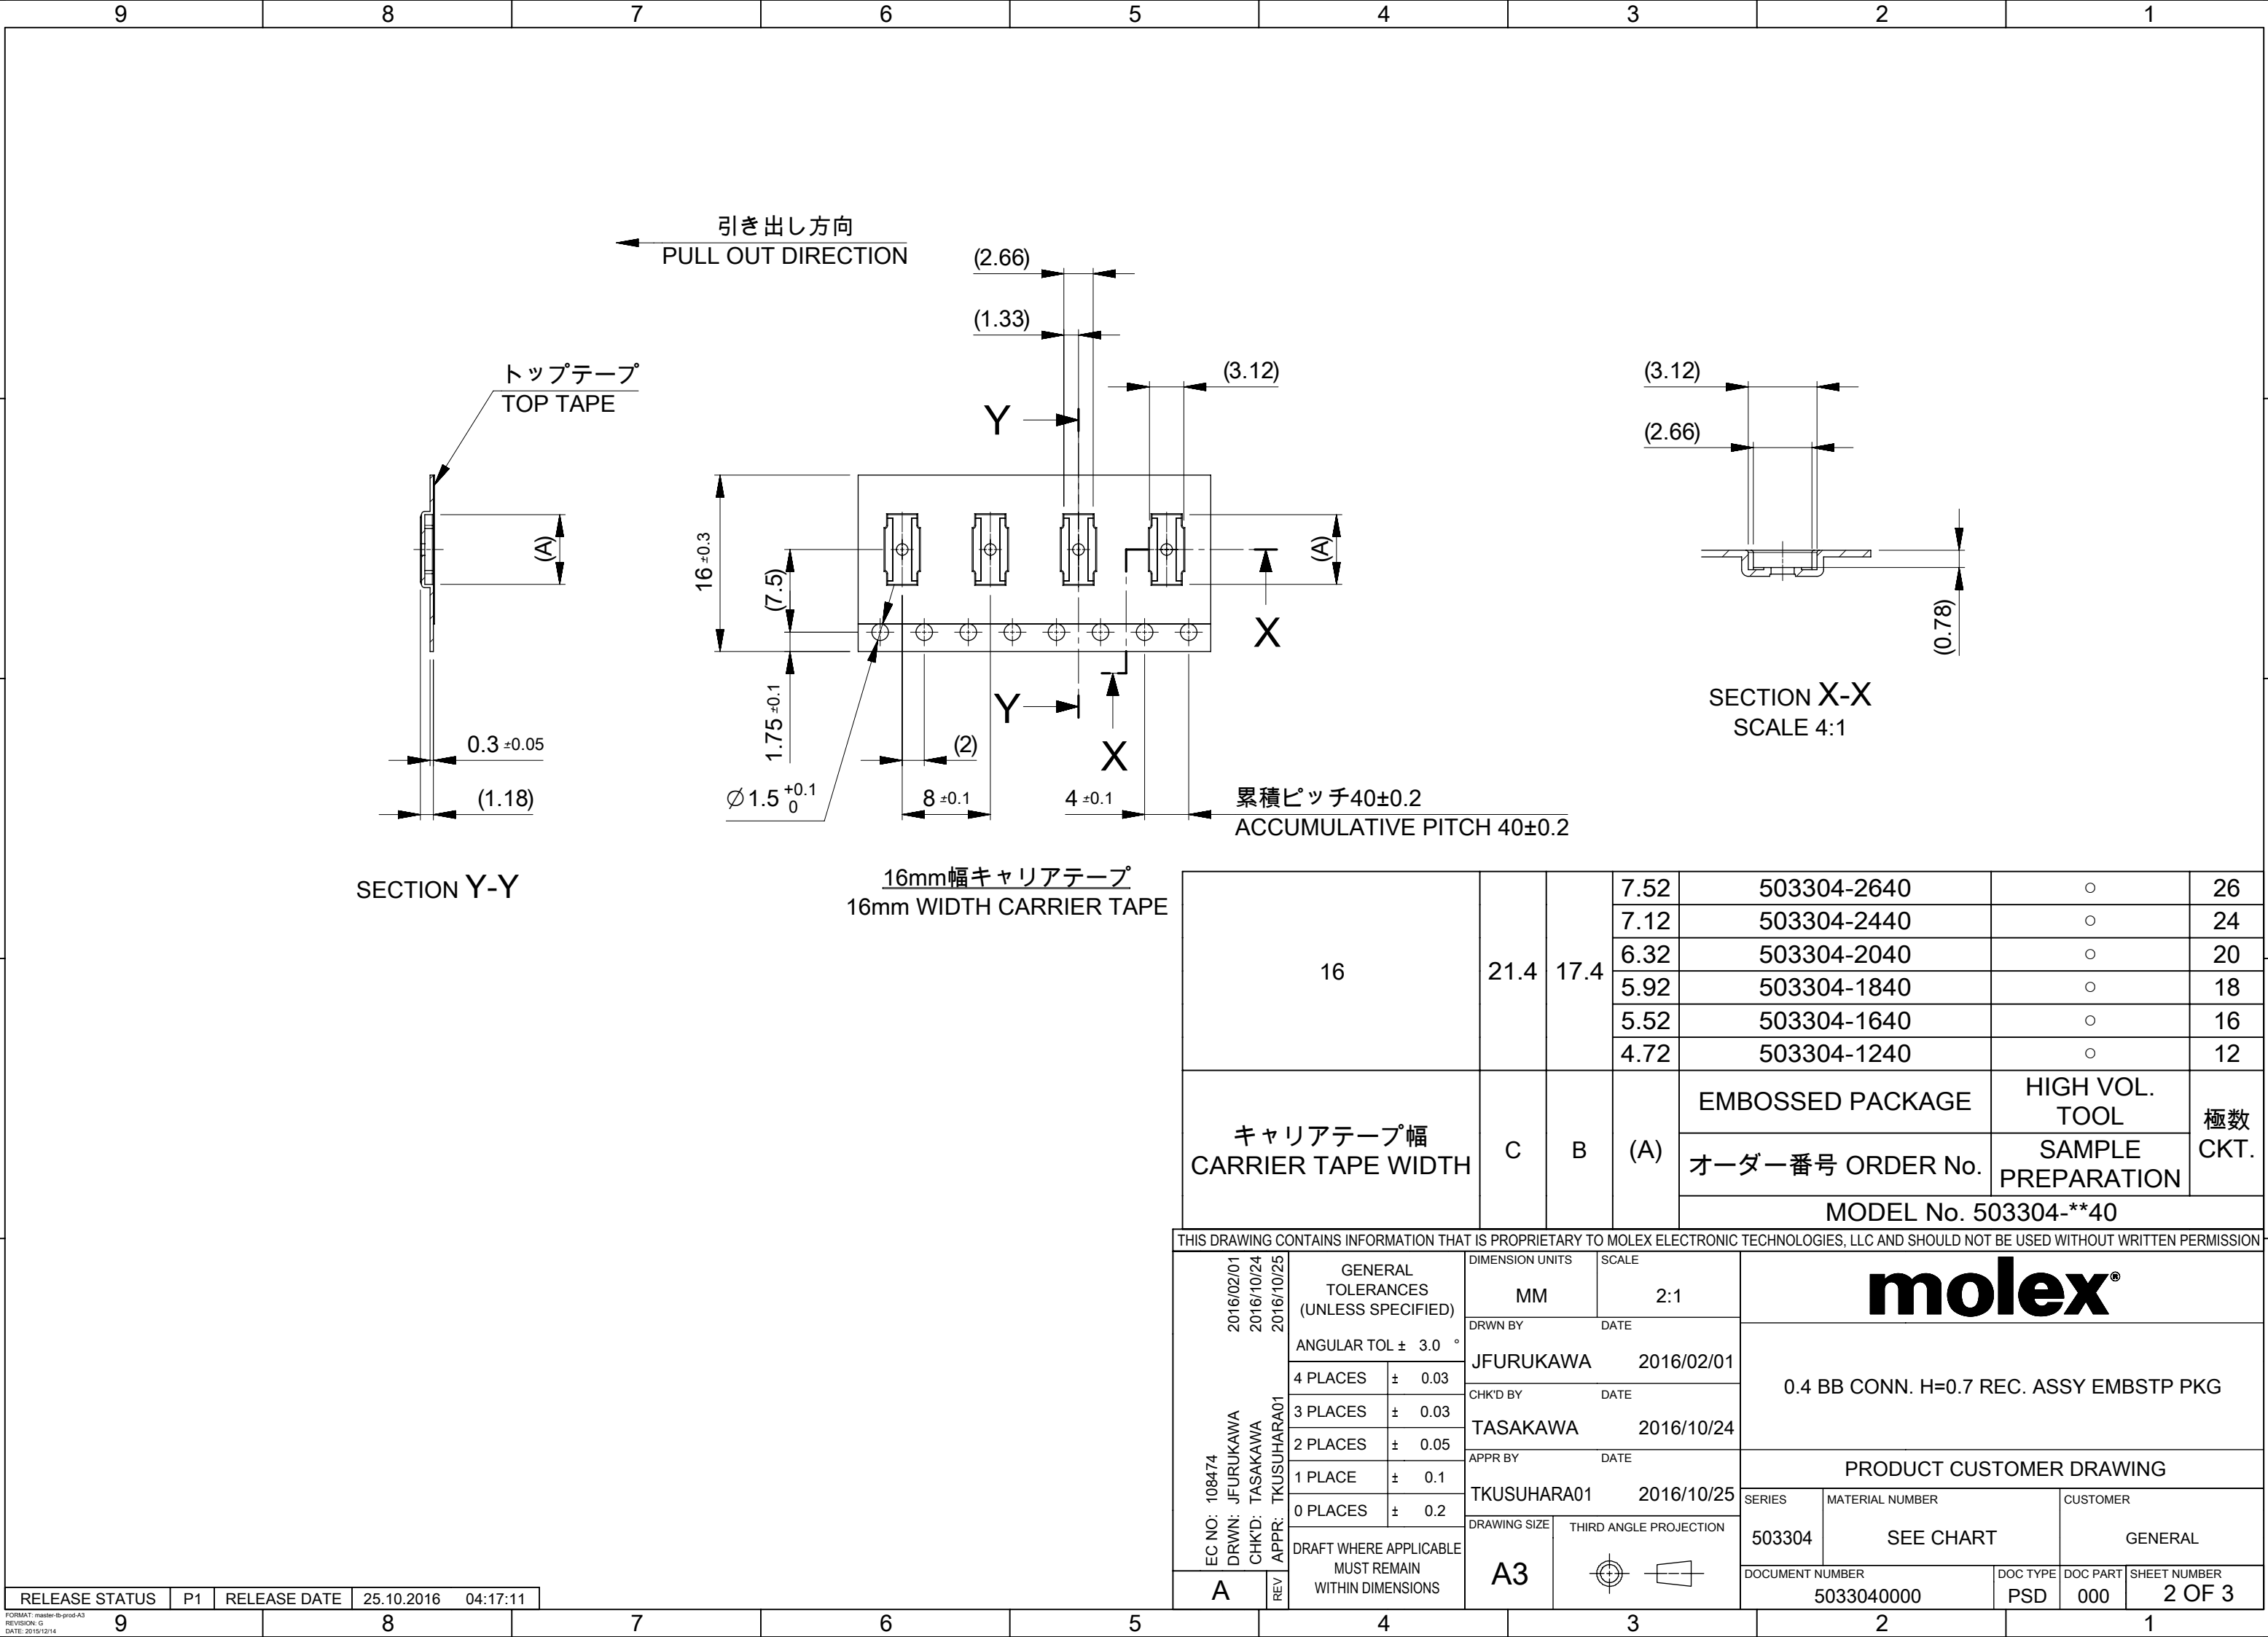

SECTION Y-Y


16mm幅キャリアテープ
16mm WIDTH CARRIER TAPE

SECTION X-X
SCALE 4:1

16	21.4	17.4	7.52	503304-2640	○	26
			7.12	503304-2440	○	24
			6.32	503304-2040	○	20
			5.92	503304-1840	○	18
			5.52	503304-1640	○	16
			4.72	503304-1240	○	12
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	EMBOSSED PACKAGE	HIGH VOL. TOOL	極数 CKT.
				オーダー番号 ORDER No.	SAMPLE PREPARATION	
				MODEL No. 503304-**40		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC NO: 108474 DRWN: JFURUKAWA CHK'D: TASAKAWA APPR: TKUSUHARA01	2016/02/01 2016/10/24 2016/10/25	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 3.0 ° 4 PLACES ± 0.03 3 PLACES ± 0.03 2 PLACES ± 0.05 1 PLACE ± 0.1 0 PLACES ± 0.2 DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DIMENSION UNITS	SCALE	molex® 0.4 BB CONN. H=0.7 REC. ASSY EMBSTP PKG			
				MM	2:1				
				DRWN BY	DATE				
				JFURUKAWA	2016/02/01				
				CHK'D BY	DATE				
				TASAKAWA	2016/10/24				
				APPR BY	DATE	PRODUCT CUSTOMER DRAWING			
				TKUSUHARA01	2016/10/25	SERIES	MATERIAL NUMBER	CUSTOMER	
				DRAWING SIZE	THIRD ANGLE PROJECTION	503304	SEE CHART	GENERAL	
						DOCUMENT NUMBER		DOC TYPE	DOC PART
						5033040000		PSD	000
						SHEET NUMBER		2 OF 3	

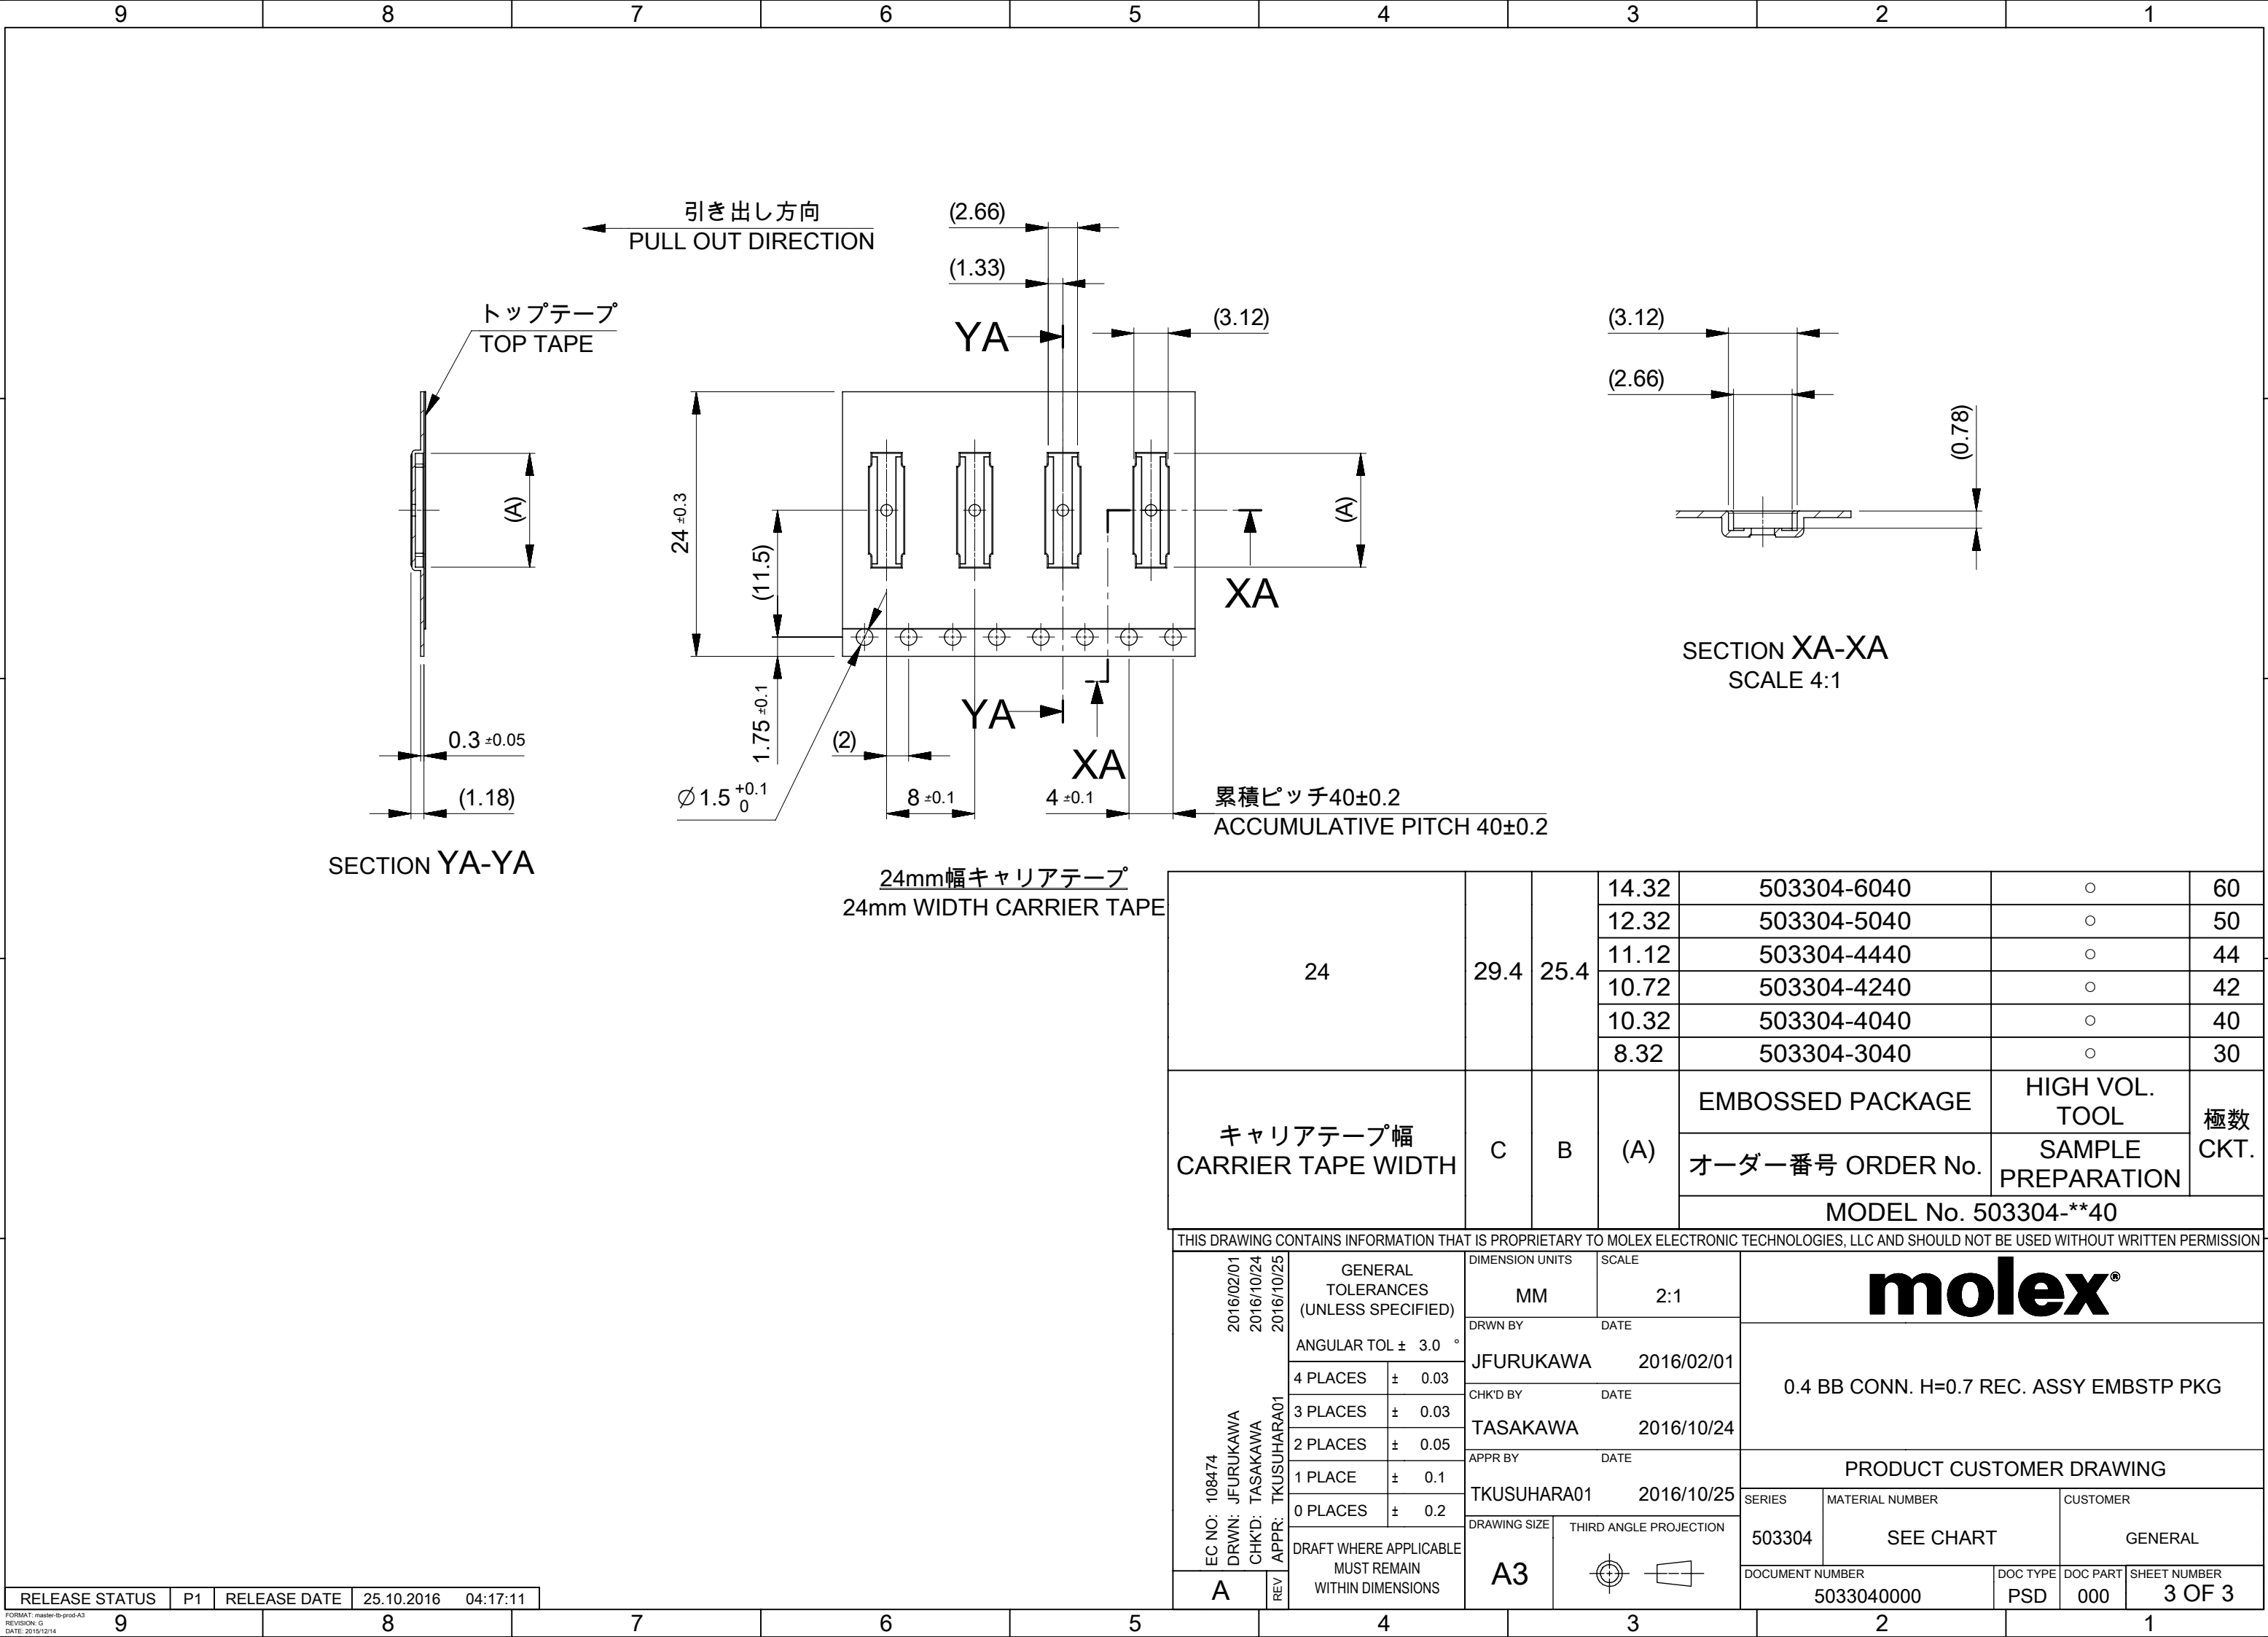

SECTION YA-YA


SECTION XA-XA
SCALE 4:1

24mm幅キャリアテープ
24mm WIDTH CARRIER TAPE

24	29.4	25.4	14.32	503304-6040	○	60
			12.32	503304-5040	○	50
			11.12	503304-4440	○	44
			10.72	503304-4240	○	42
			10.32	503304-4040	○	40
			8.32	503304-3040	○	30
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	EMBOSSED PACKAGE		HIGH VOL. TOOL
				オーダー番号 ORDER No.		SAMPLE PREPARATION
				MODEL No. 503304-**40		極数 CKT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


EC NO: 108474 DRWN: JFURUKAWA CHK'D: TASAKAWA APPR: TKUSUHARA01	2016/02/01 2016/10/24 2016/10/25	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE	molex® 0.4 BB CONN. H=0.7 REC. ASSY EMBSTP PKG						
		ANGULAR TOL ± 3.0 °		MM	2:1							
		4 PLACES ± 0.03		DRWN BY JFURUKAWA		DATE 2016/02/01		PRODUCT CUSTOMER DRAWING				
		3 PLACES ± 0.03		CHK'D BY TASAKAWA		DATE 2016/10/24						
		2 PLACES ± 0.05		APPR BY TKUSUHARA01		DATE 2016/10/25						
		1 PLACE ± 0.1		DRAWING SIZE		THIRD ANGLE PROJECTION		SERIES	MATERIAL NUMBER	CUSTOMER		
		0 PLACES ± 0.2		A3				503304	SEE CHART	GENERAL		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						DOCUMENT NUMBER		DOC TYPE	DOC PART	SHEET NUMBER
								5033040000		PSD	000	3 OF 3
		A	REV									

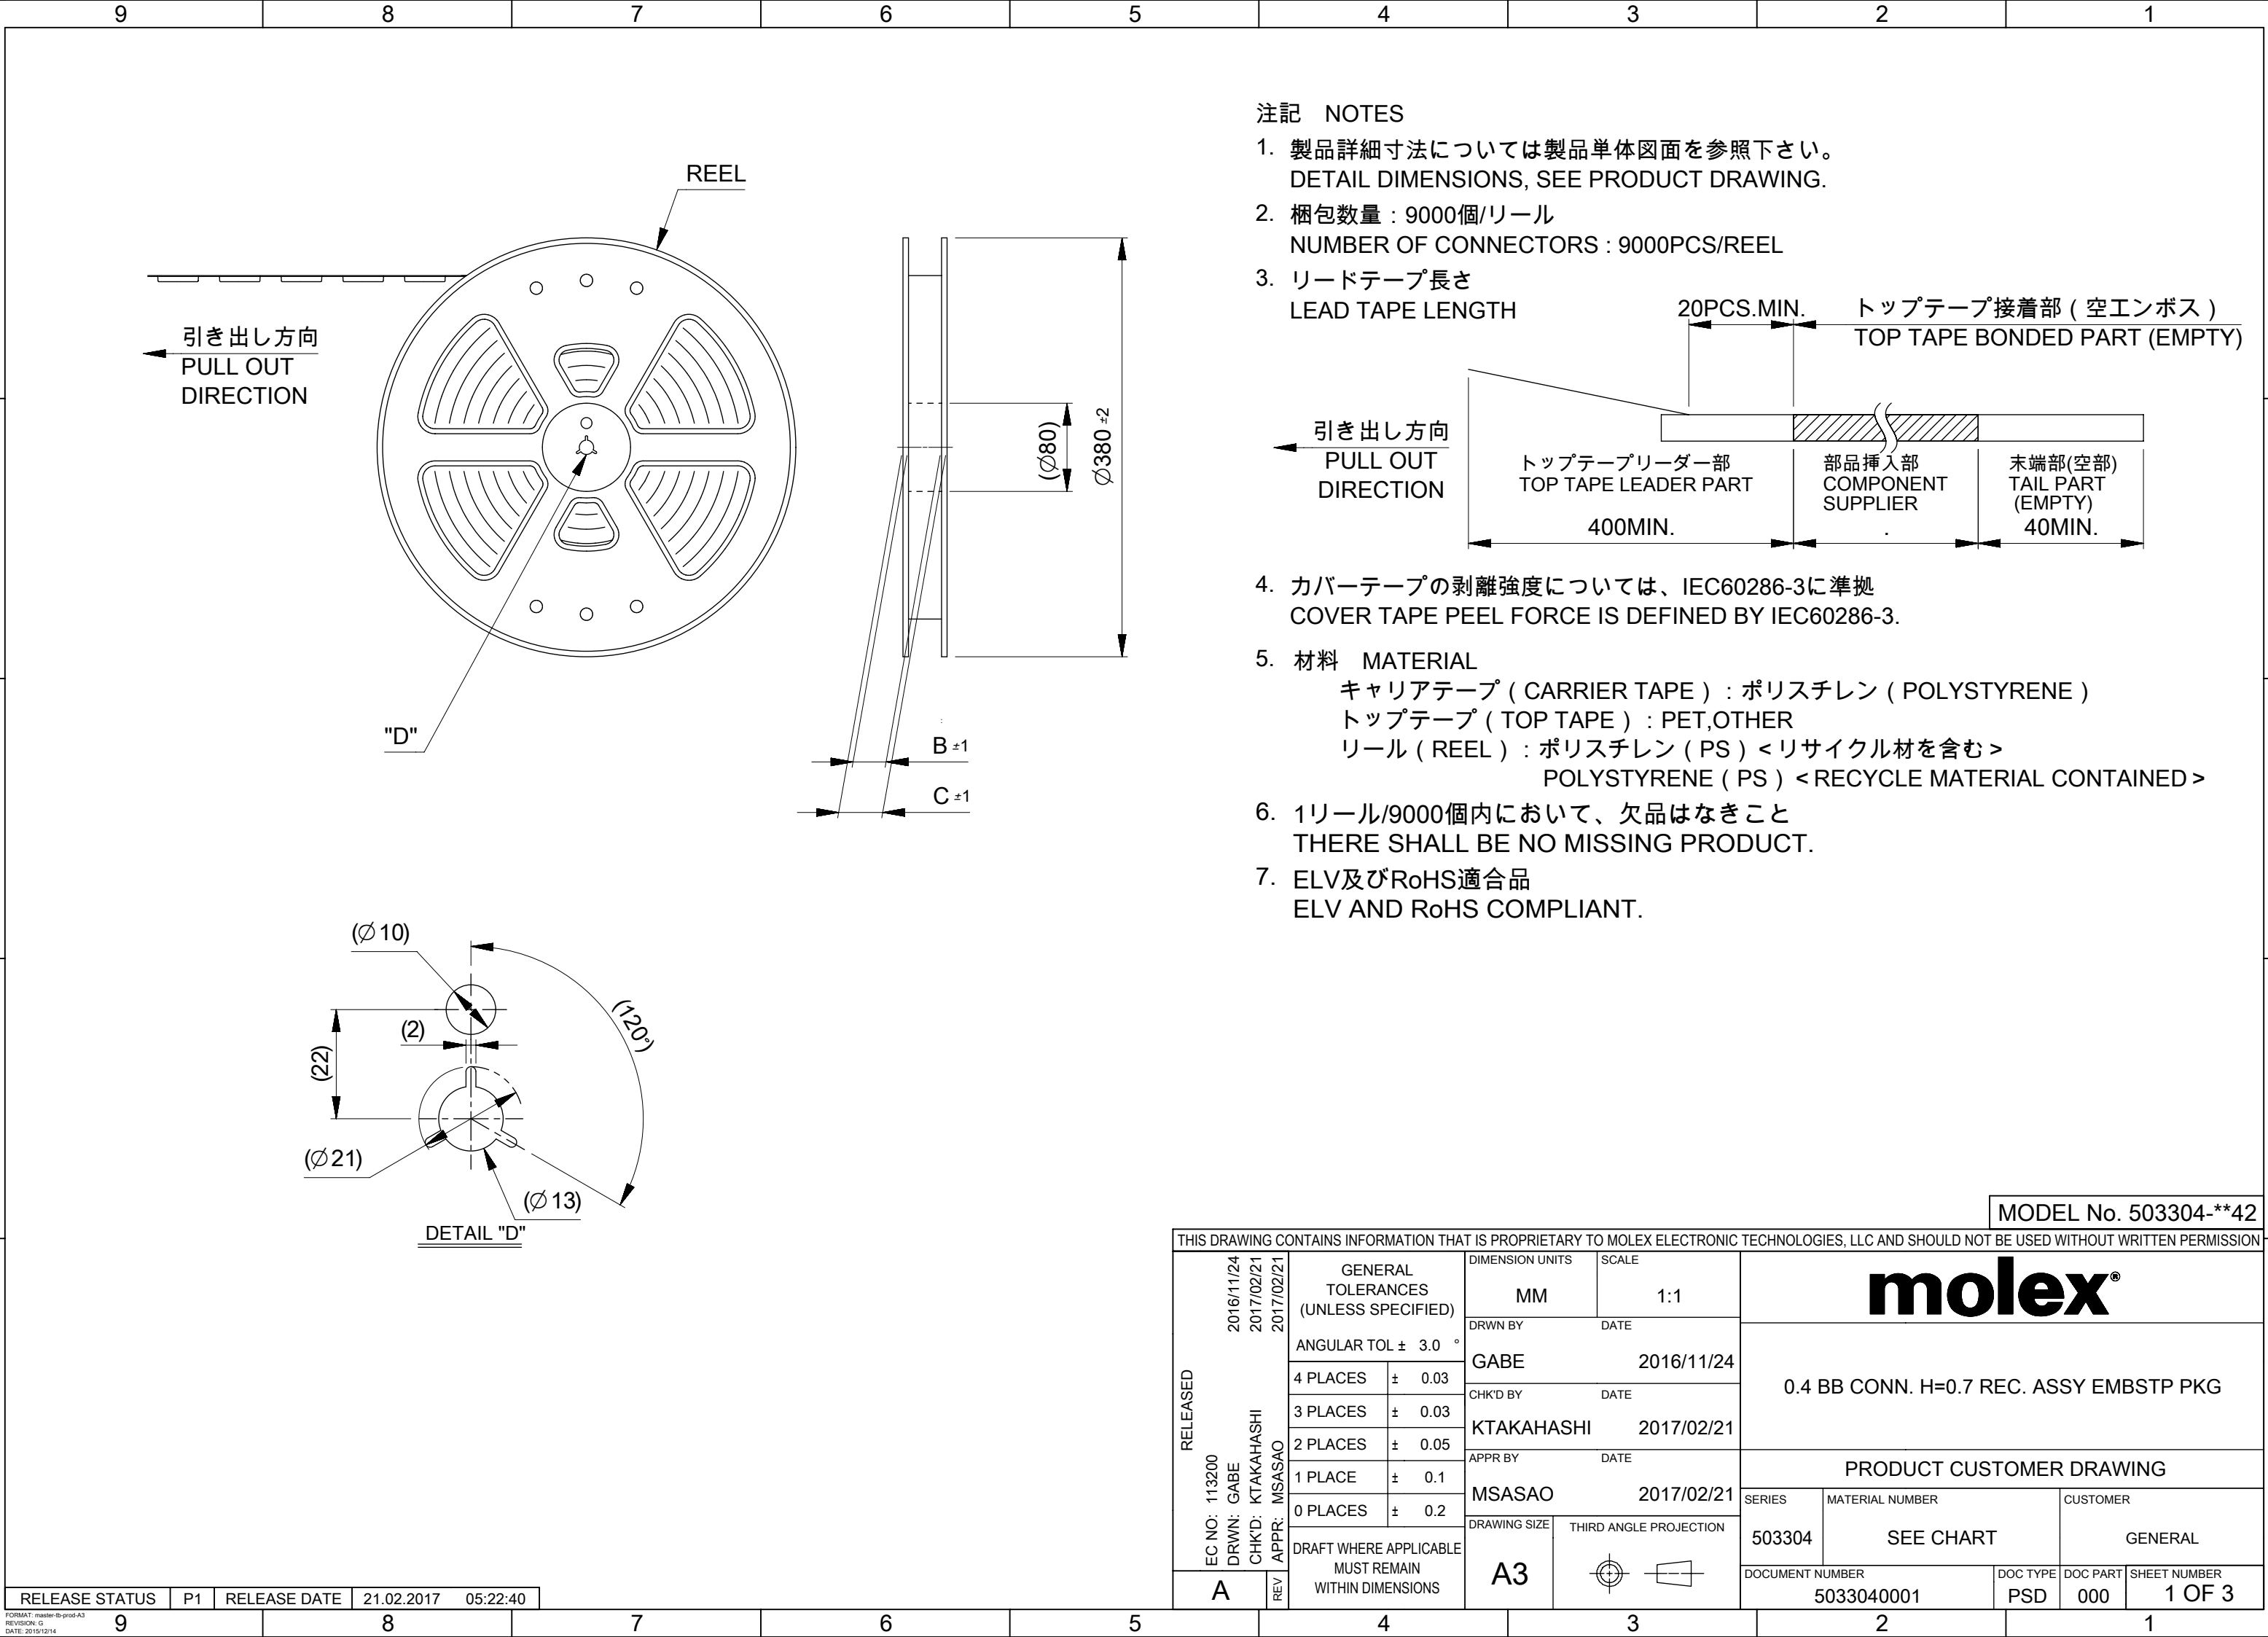


注記 NOTES

- 製品詳細寸法については製品単体図面を参照下さい。
DETAIL DIMENSIONS, SEE PRODUCT DRAWING.
- 梱包数量 : 9000個/リール
NUMBER OF CONNECTORS : 9000PCS/REEL
- リードテープ長さ
LEAD TAPE LENGTH
20PCS.MIN. トップテープ接着部 (空エンボス)
TOP TAPE BONDED PART (EMPTY)
引き出し方向
PULL OUT DIRECTION
トップテープリーダー部
TOP TAPE LEADER PART
部品挿入部
COMPONENT SUPPLIER
末端部(空部)
TAIL PART (EMPTY)
400MIN. 40MIN.
- カバーテープの剥離強度については、IEC60286-3に準拠
COVER TAPE PEEL FORCE IS DEFINED BY IEC60286-3.
- 材料 MATERIAL
キャリアテープ (CARRIER TAPE) : ポリスチレン (POLYSTYRENE)
トップテープ (TOP TAPE) : PET,OTHER
リール (REEL) : ポリスチレン (PS) <リサイクル材を含む>
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED >
- 1リール/9000個内において、欠品はなきこと
THERE SHALL BE NO MISSING PRODUCT.
- ELV及びRoHS適合品
ELV AND RoHS COMPLIANT.

MODEL No. 503304-**42

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
RELEASED EC NO: 113200 DRWN: GABE CHK'D: KTAKAHASHI APPR: MSASAO	2016/11/24 2017/02/21 2017/02/21	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex[®] 0.4 BB CONN. H=0.7 REC. ASSY EMBSTP PKG					
				MM		1:1							
		ANGULAR TOL ± 3.0 °		DRWN BY		DATE		PRODUCT CUSTOMER DRAWING					
		4 PLACES ± 0.03		GABE		2016/11/24							
		3 PLACES ± 0.03		CHK'D BY		DATE							
		2 PLACES ± 0.05		KTAKAHASHI		2017/02/21							
		1 PLACE ± 0.1		APPR BY		DATE							
		0 PLACES ± 0.2		MSASAO		2017/02/21		SERIES		MATERIAL NUMBER		CUSTOMER	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE		THIRD ANGLE PROJECTION		503304		SEE CHART		GENERAL	
				A3				DOCUMENT NUMBER		DOC TYPE		DOC PART	
						5033040001		PSD		000		1 OF 3	
A	REV												

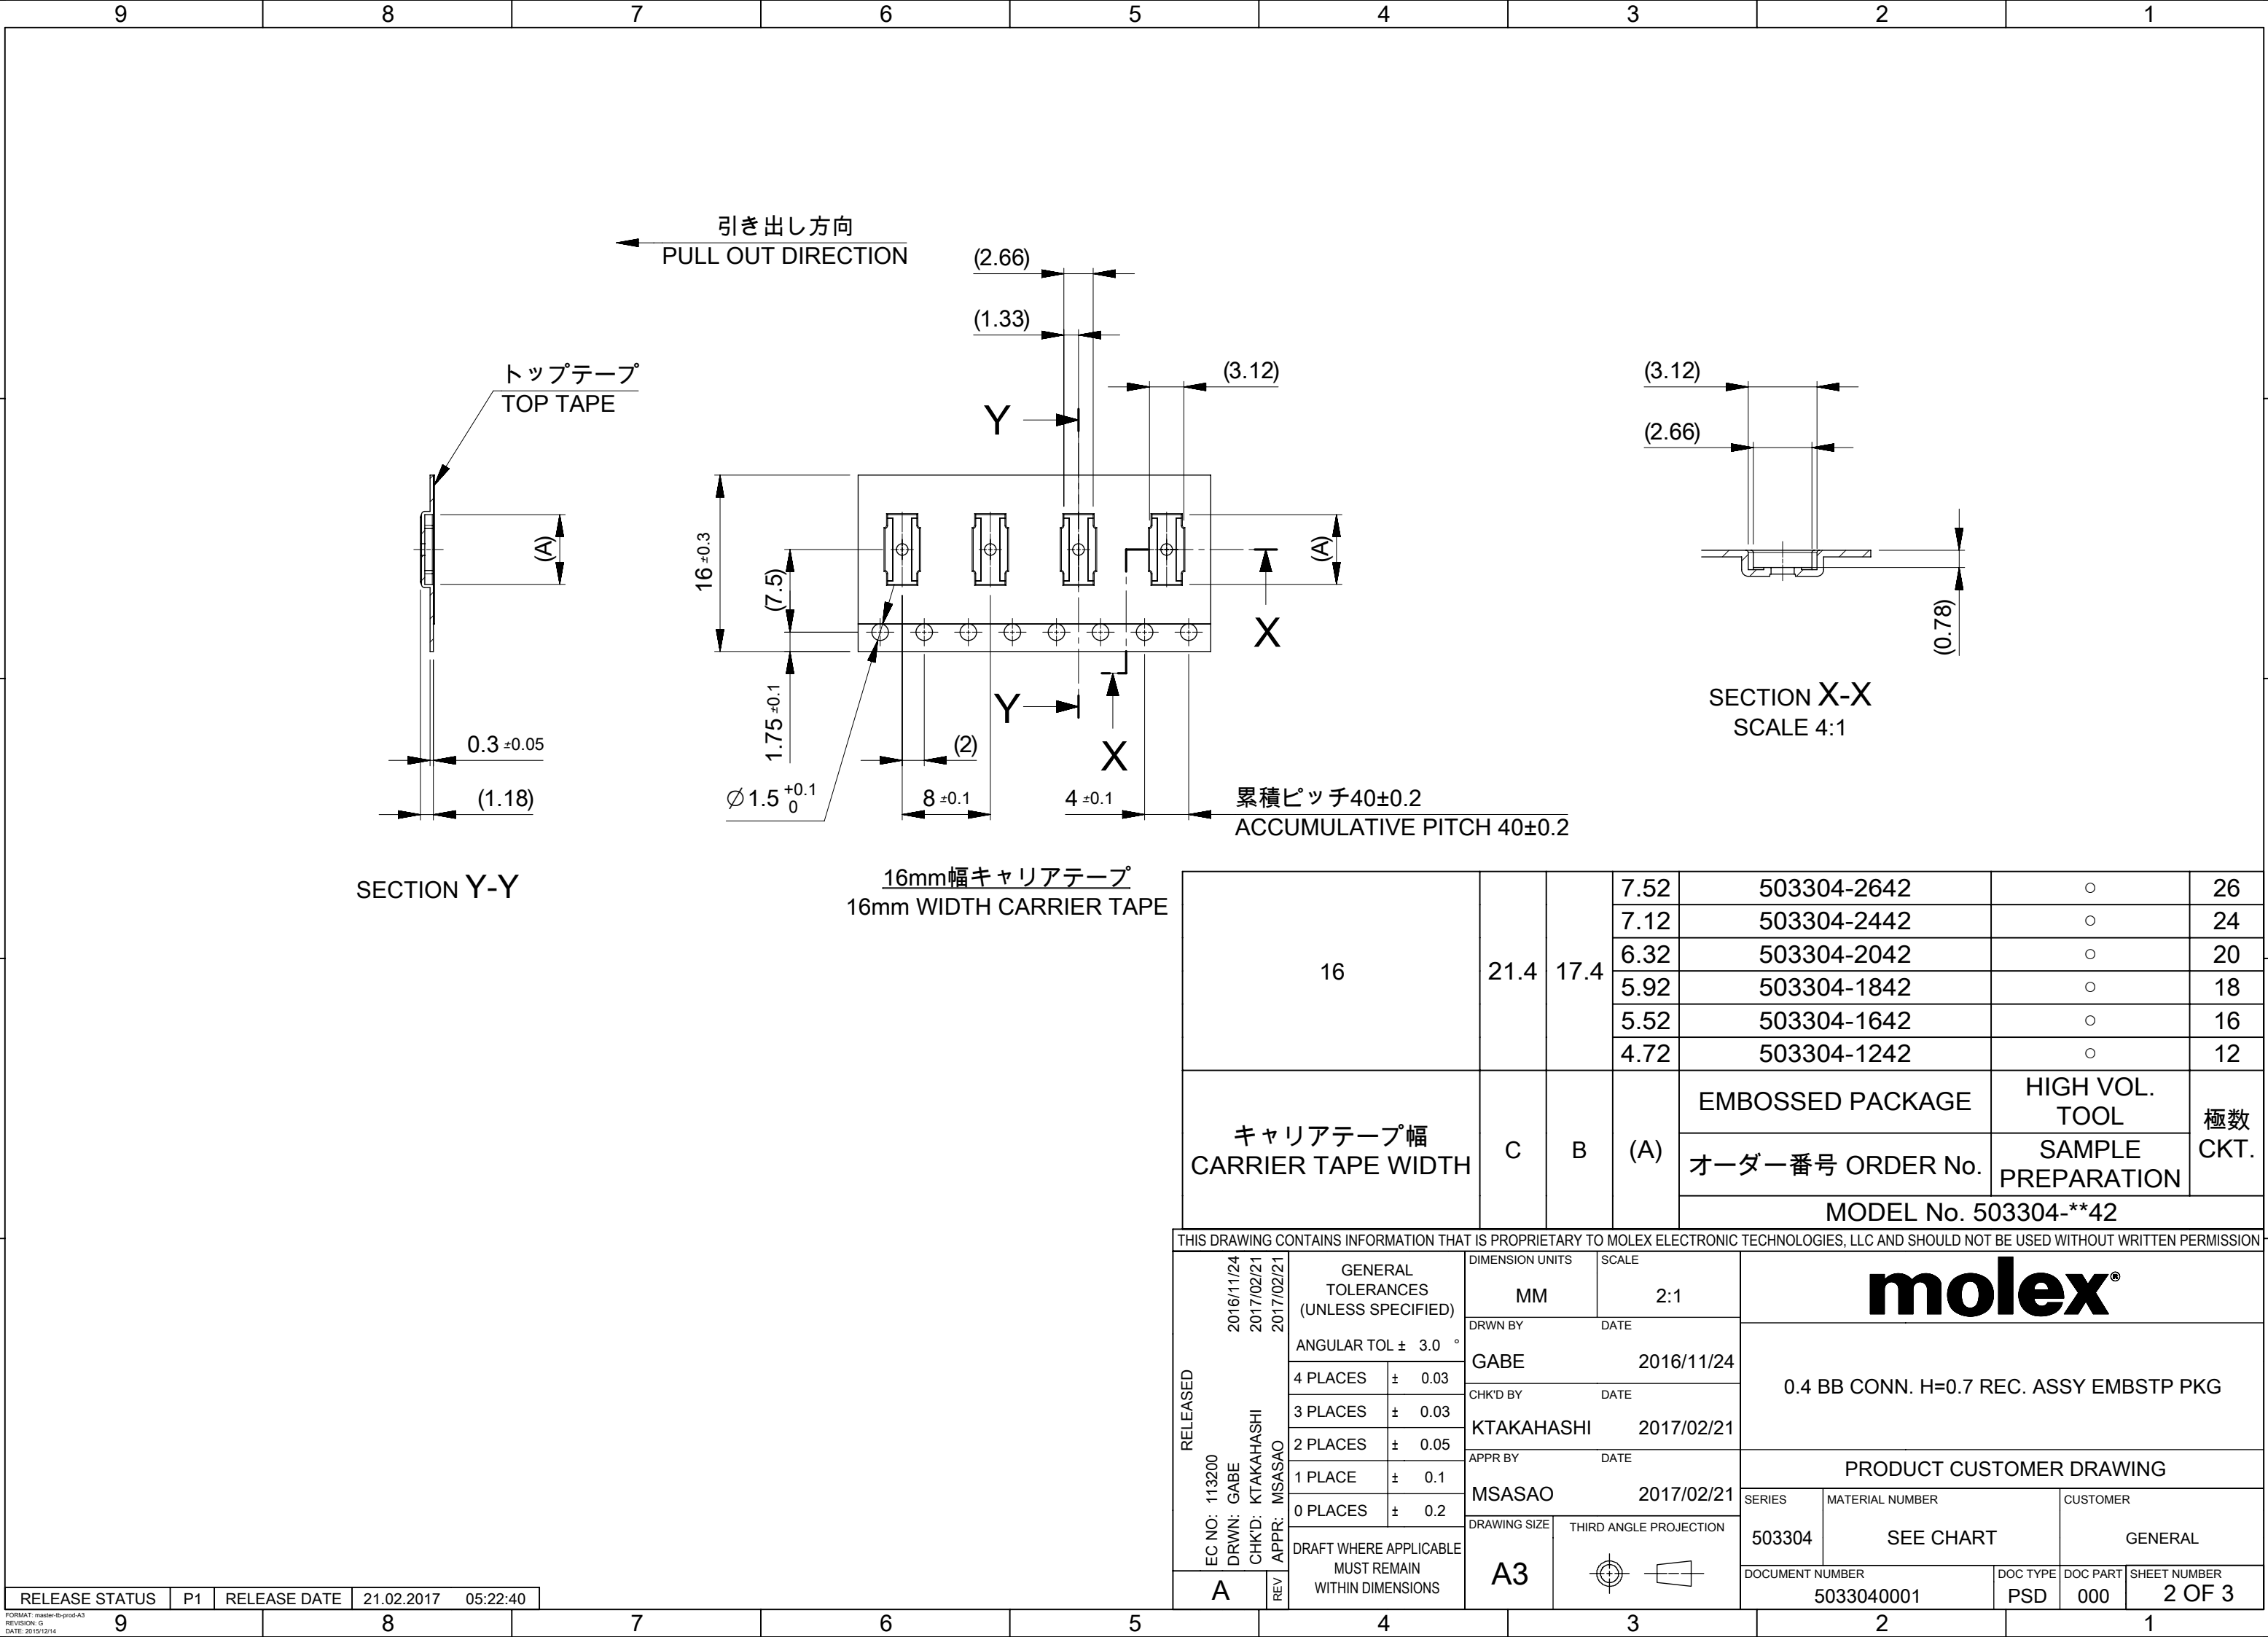


SECTION Y-Y


SECTION X-X
SCALE 4:1


16mm幅キャリアテープ
16mm WIDTH CARRIER TAPE


16	21.4	17.4	7.52	503304-2642	○	26
			7.12	503304-2442	○	24
			6.32	503304-2042	○	20
			5.92	503304-1842	○	18
			5.52	503304-1642	○	16
			4.72	503304-1242	○	12
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	EMBOSSED PACKAGE	HIGH VOL. TOOL	極数 CKT.
				オーダー番号 ORDER No.	SAMPLE PREPARATION	
				MODEL No. 503304-**42		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

RELEASED EC NO: 113200 DRWN: GABE CHK'D: KTAKAHASHI APPR: MSASAO REV	2016/11/24 2017/02/21 2017/02/21	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 3.0 ° 4 PLACES ± 0.03 3 PLACES ± 0.03 2 PLACES ± 0.05 1 PLACE ± 0.1 0 PLACES ± 0.2 DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DIMENSION UNITS		SCALE		molex® 0.4 BB CONN. H=0.7 REC. ASSY EMBSTP PKG							
				MM		2:1									
				DRWN BY		DATE									
						GABE		2016/11/24		PRODUCT CUSTOMER DRAWING					
						CHK'D BY		DATE							
						KTAKAHASHI		2017/02/21							
						APPR BY		DATE							
						MSASAO		2017/02/21							
						DRAWING SIZE		THIRD ANGLE PROJECTION		SERIES		MATERIAL NUMBER		CUSTOMER	
						A3				503304		SEE CHART		GENERAL	
A		REV				DOCUMENT NUMBER		DOC TYPE		DOC PART		SHEET NUMBER			
						5033040001		PSD		000		2 OF 3			

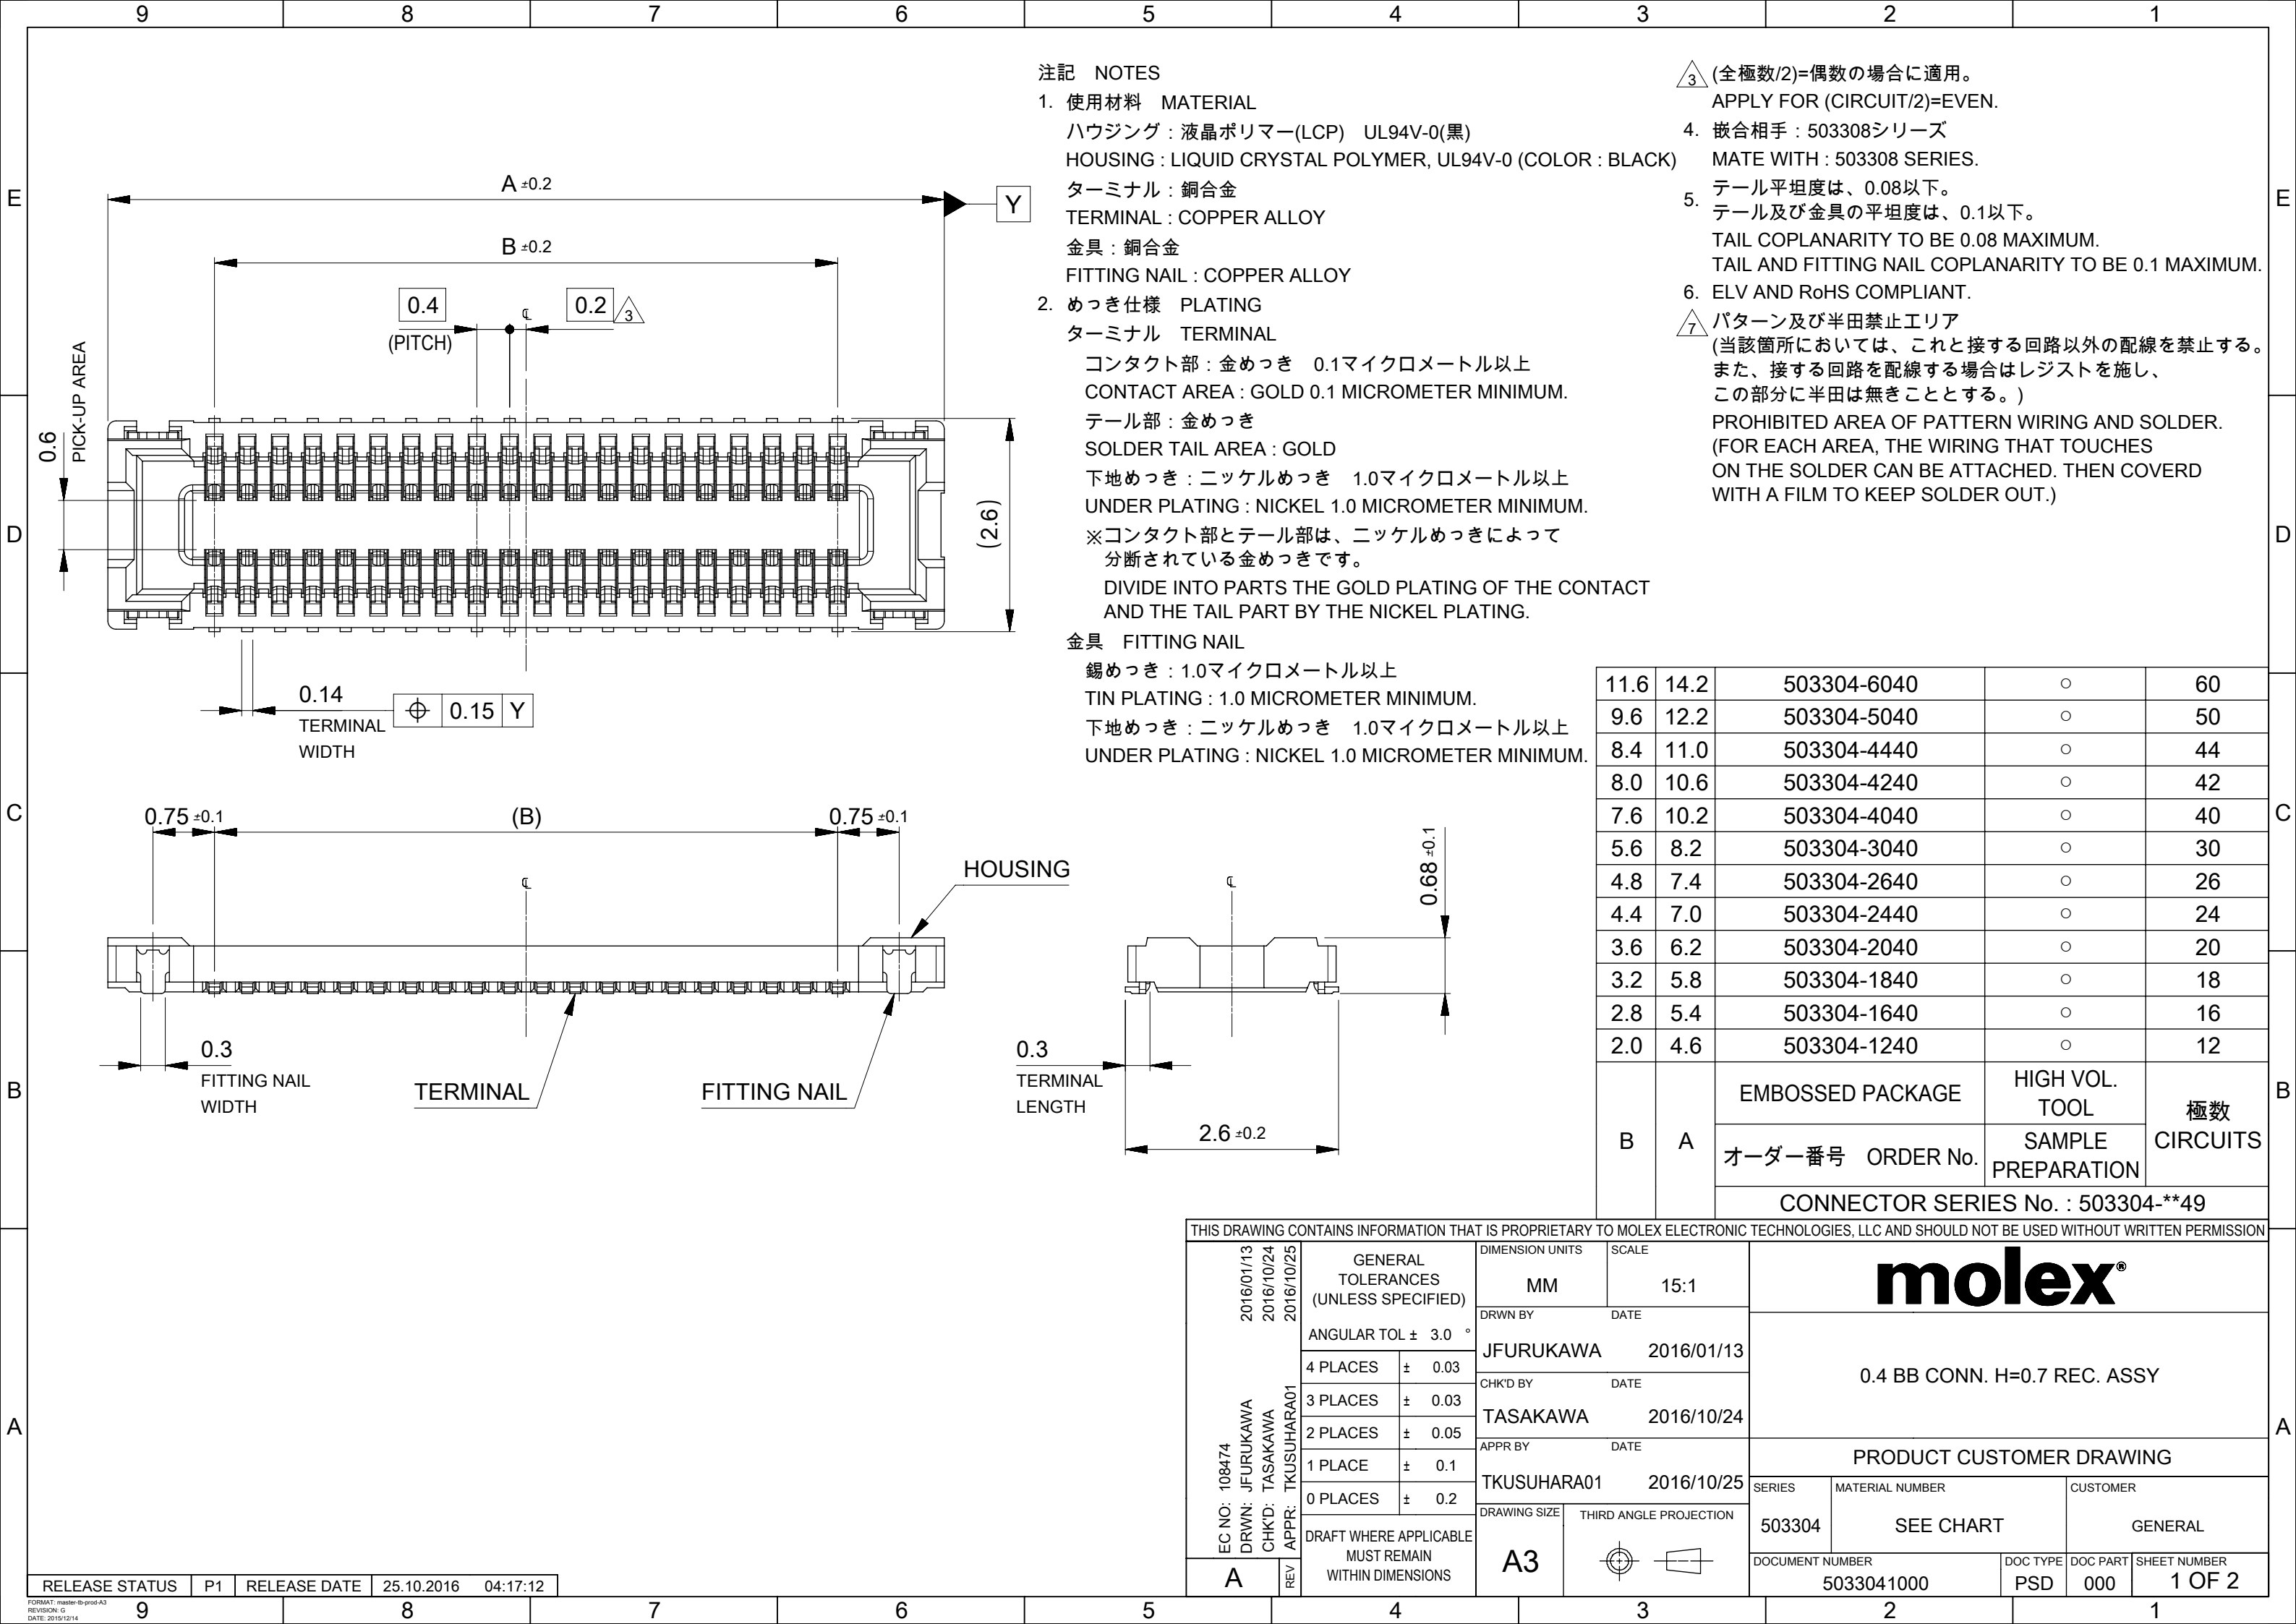

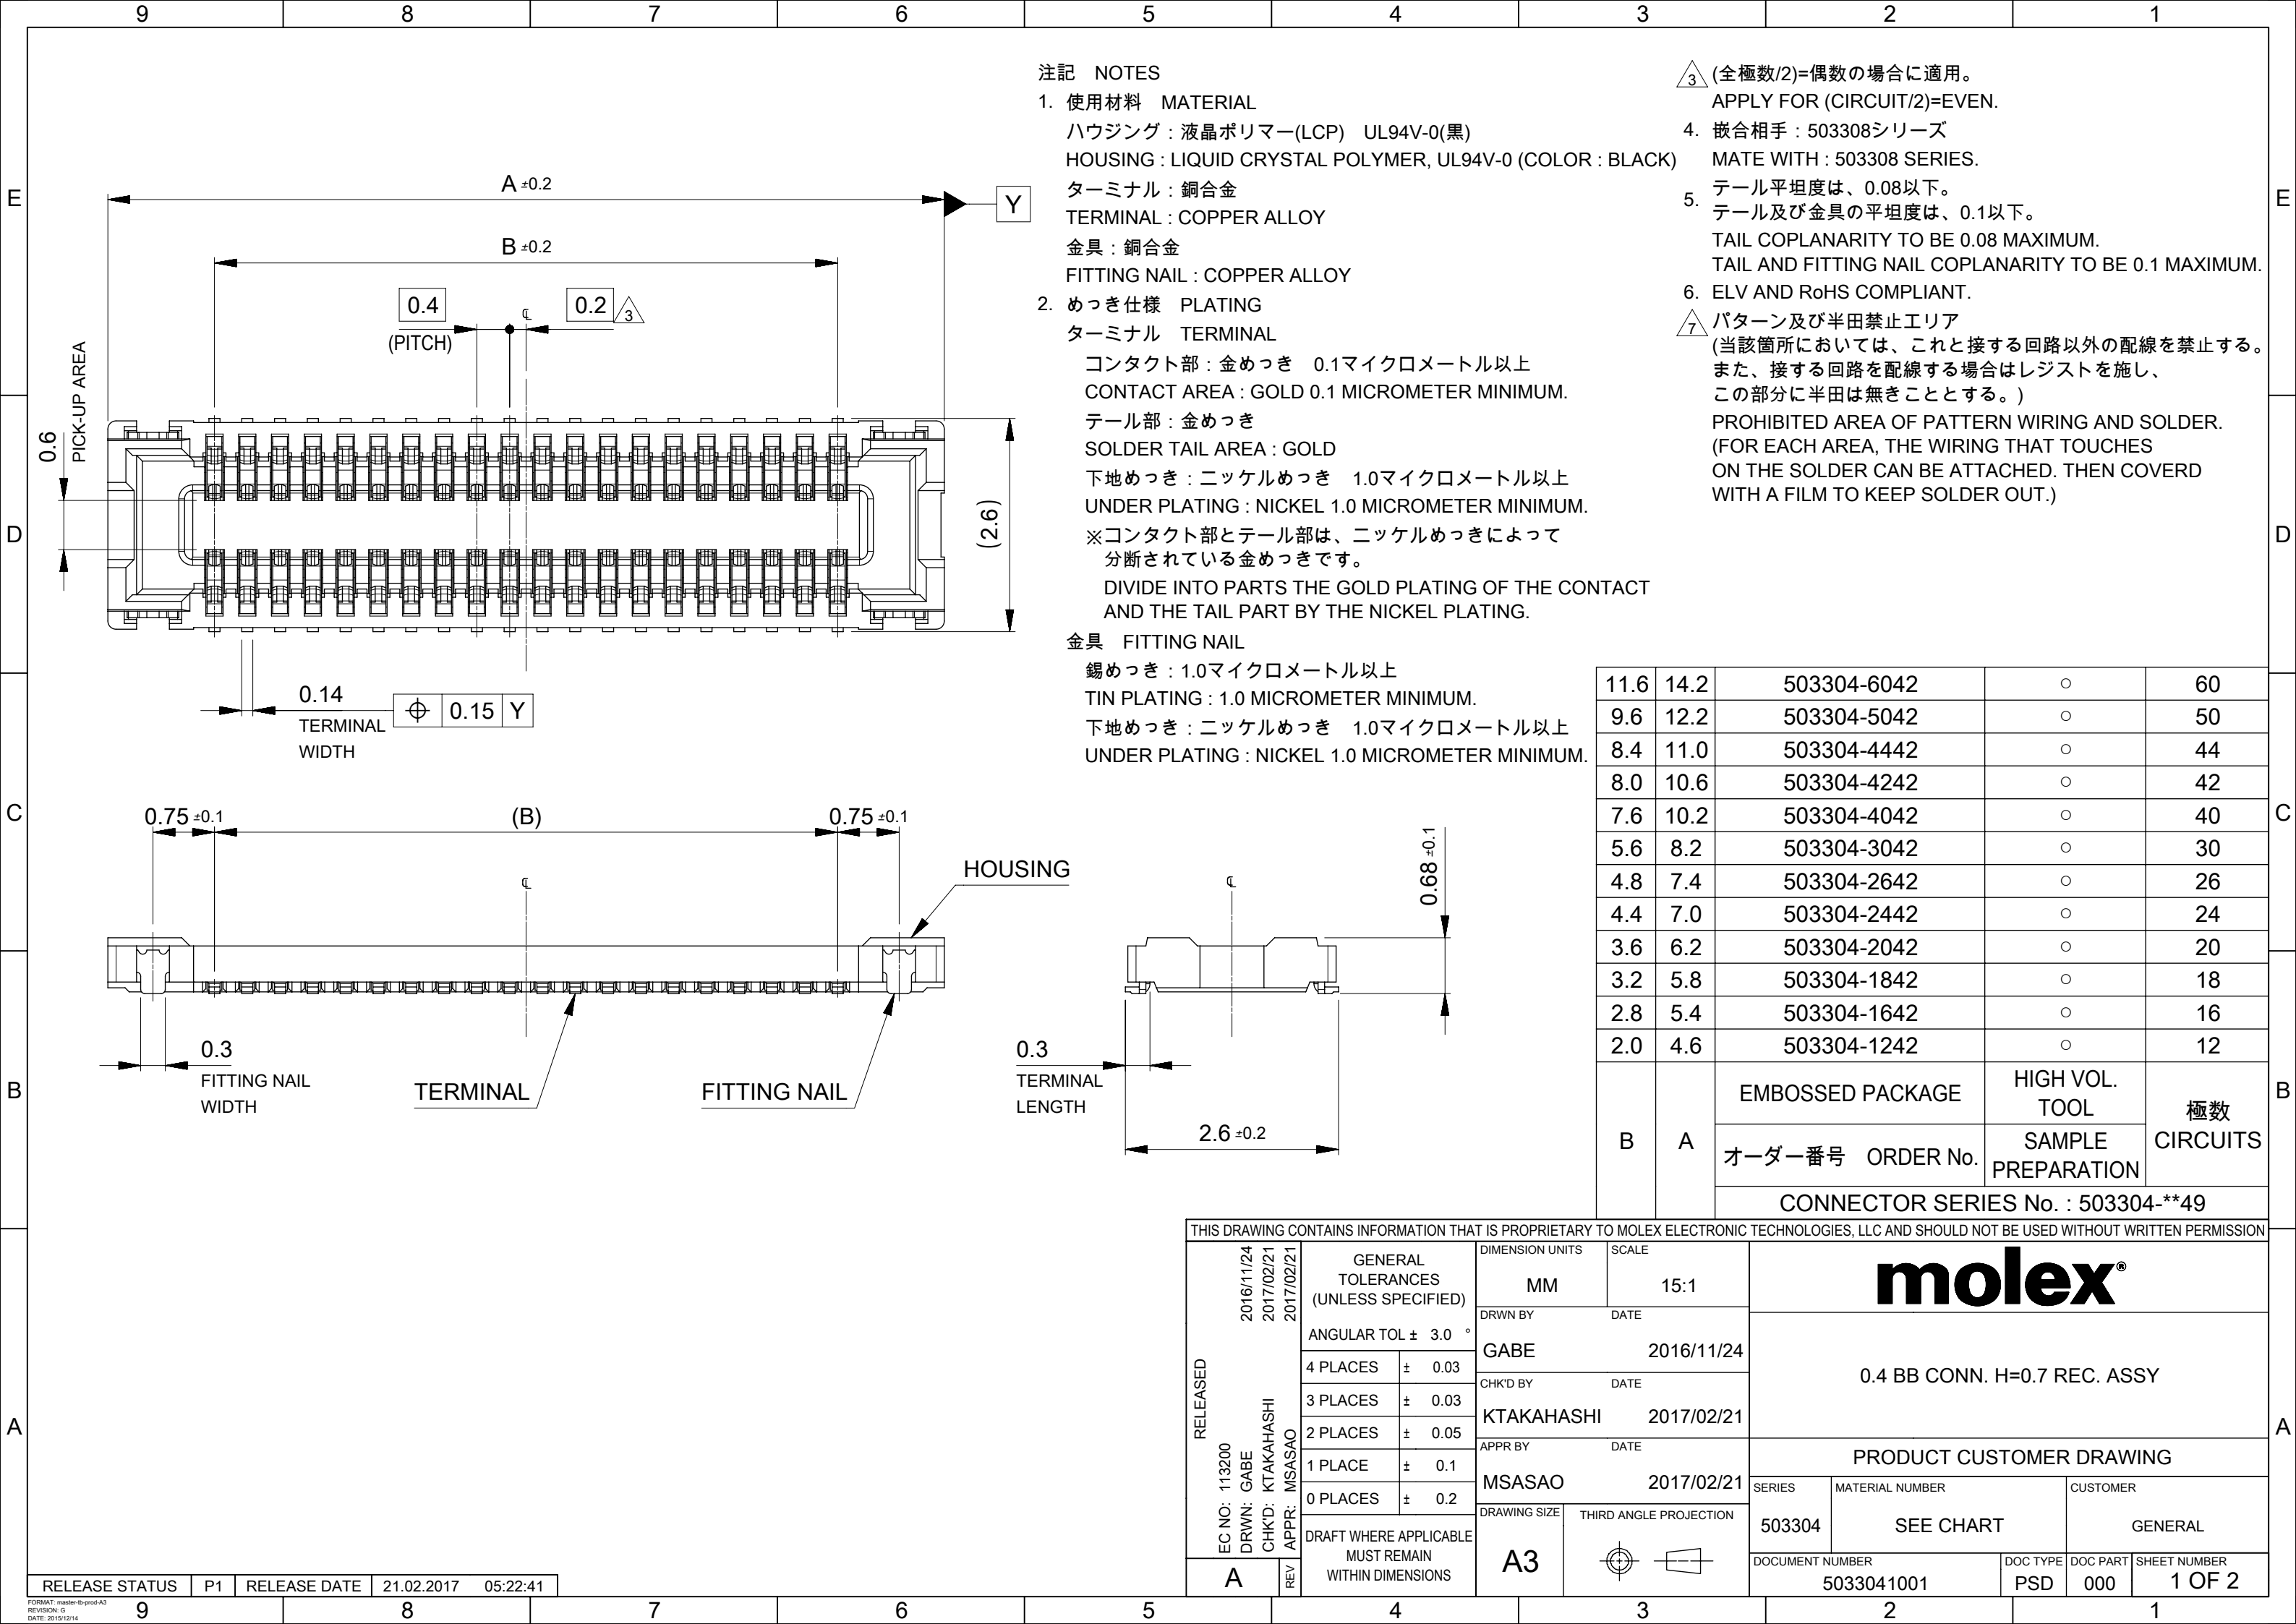

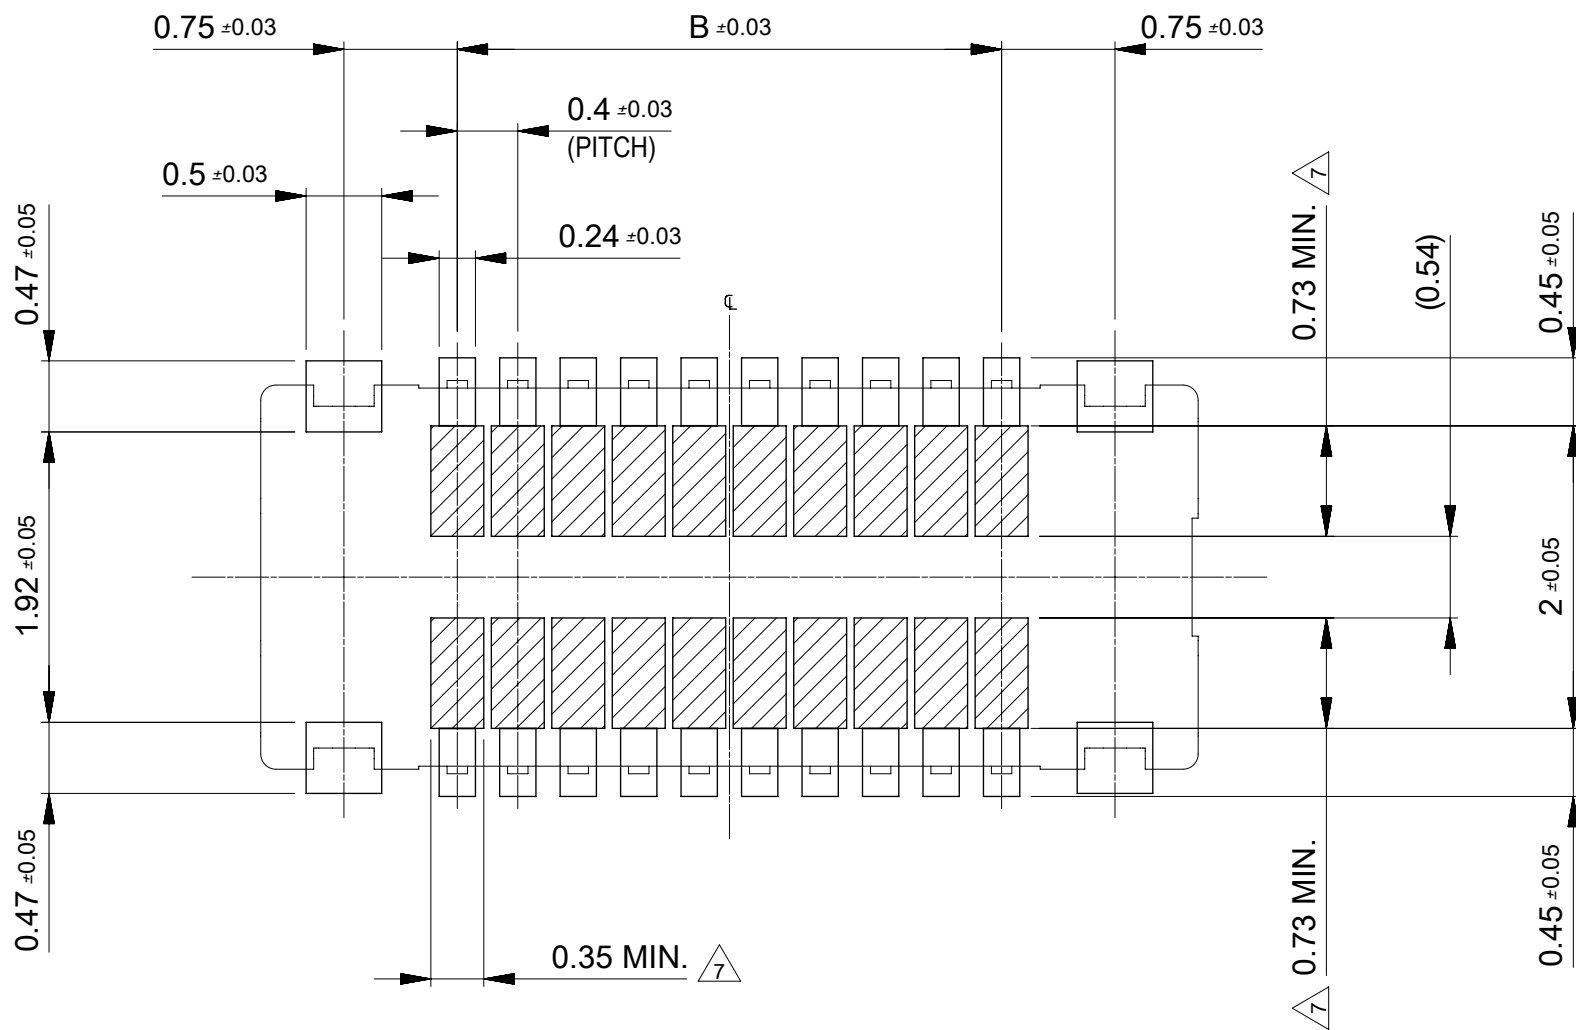

RECOMMENDED P.W.BOARD PATTERN LAYOUT (REFERENCE)

RECOMMENDED THICKNESS OF METAL MASK : t=0.1 mm
RECOMMENDED OPEN APERTURE RATIO OF METAL MASK : 100%

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
RELEASED EC NO: 113200 DRWN: GABE CHK'D: KTAKAHASHI APPR: MSASAO	2016/11/24 2017/02/21 2017/02/21	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex®					
				MM		20:1							
		ANGULAR TOL ± 3.0 °		DRWN BY		DATE		0.4 BB CONN. H=0.7 REC. ASSY					
		4 PLACES ± 0.03		GABE		2016/11/24							
		3 PLACES ± 0.03		CHK'D BY		DATE		PRODUCT CUSTOMER DRAWING					
		2 PLACES ± 0.05		KTAKAHASHI		2017/02/21							
		1 PLACE ± 0.1		APPR BY		DATE							
		0 PLACES ± 0.2		MSASAO		2017/02/21							
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE		THIRD ANGLE PROJECTION		SERIES		MATERIAL NUMBER		CUSTOMER	
				A3				503304		SEE CHART		GENERAL	
A	REV					DOCUMENT NUMBER		DOC TYPE		DOC PART		SHEET NUMBER	
				5033041001				PSD		000		2 OF 2	