

10 9 8 7 6 5 4 3 2 1

NOTES




- 嵌合相手: 505565**0*
MATE WITH: 505565**0*
- 偶数極 に適用
APPLY FOR EVEN CKT.
- 製品仕様書: 5055650002PS000
PRODUCT SPECIFICATION: 5055650002PS000
- オーダー番号と色、極数の関係
RELATION ORDER NUMBER AND COLOR, CKT.

505567**8*		NO.	COLOR
CIRCUIT NO.	色	0	NATURAL
		1	BLACK
		2	RED
		3	YELLOW
		4	BLUE
		6	GREEN
		8	ORANGE

- ELV及びRoHS適合品
ELV AND RoHS COMPLIANT
- ターミナルとネールの平坦度は0.1mm以下
TERMINAL AND NAIL COPLANARITY : 0.1mm MAX.

10.70	18.75	22.20	23.25	505567168*	16
10.70	17.50	20.95	22.00	505567158*	15
10.70	16.25	19.70	20.75	505567148*	14
9.20	15.00	18.45	19.50	505567138*	13
9.20	13.75	17.20	18.25	505567128*	12
9.20	12.50	15.95	17.00	505567118*	11
9.20	11.25	14.70	15.75	505567108*	10
6.70	10.00	13.45	14.50	505567098*	9
6.70	8.75	12.20	13.25	505567088*	8
6.70	7.50	10.95	12.00	505567078*	7
6.60	6.25	9.70	10.75	505567068*	6
5.35	5.00	8.45	9.50	505567058*	5
4.10	3.75	7.20	8.25	505567048*	4
2.85	2.50	5.95	7.00	505567038*	3
1.90	1.25	4.70	5.75	505567028*	2
D	C	B	A	EMBOSSED TAPE PKG ORDER NO.	極数 CKT NO.

回路番号1マーク
CKT NO.1 MARK

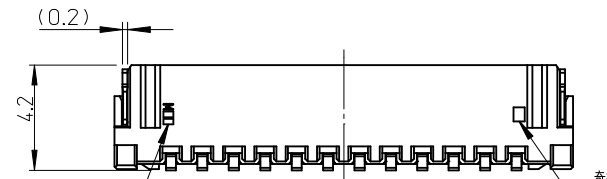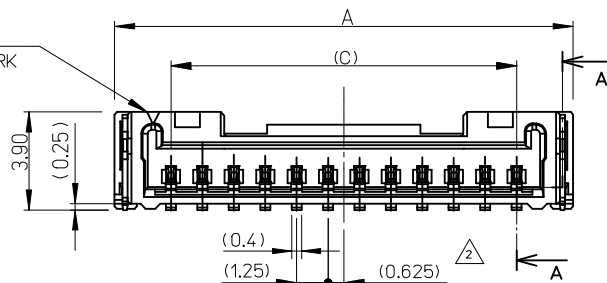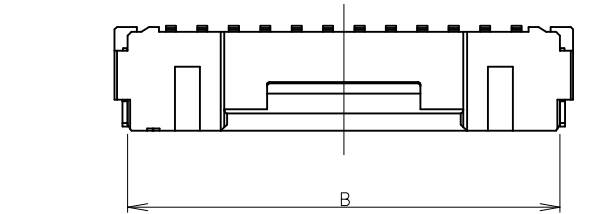

奇数キャビティ: キャビティ番号及び金型番号

偶数キャビティ: トレードマーク

ODD CAVITY: CAVITY AND MOLD NO.

EVEN CAVITY: TRADE MARK


奇数キャビティ: トレードマーク

偶数キャビティ: キャビティ番号及び金型番号

ODD CAVITY: TRADE MARK

EVEN CAVITY: CAVITY AND MOLD NO.


SECTION A-A



部品 PART	材質 MATERIAL
ハウジング HOUSING	ポリアミド(PA)、ガラス充填、UL94 V-0、色: SHEET 2参照 POLYAMIDE (PA), GLASS FILLED, UL94 V-0, COLOR: SEE SHEET 2
ターミナル TERMINAL	黄銅 BRASS 金めっき: 0.1 MICRO-METER MIN. AU PLATED ニッケルめっき(下地): 1.0 MICRO-METER MIN. NICKEL (UNDER-PLATED)
ネール NAIL	黄銅 BRASS 錫めっき: 1.0 MICRO-METER MIN. MATTE TIN PLATED ニッケルめっき(下地): 1.0 MICRO-METER MIN. NICKEL (UNDER-PLATED)

tb_frame_A3_J_AM_S
Rev J 2015/09/01

RELEASED EC NO: J2017-0274 DRWN:SSHIMONISHI 2016/11/17 CHKD:KOMURAKAMI 2016/11/17 APPR:TKANEKO 2016/12/13	DESCRIPTION REV A	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
		0.25 UNDER		± 0.03	DRAWN BY	DATE	TITLE MICRO-LOCK PLUS 1.25 W/B CONN SINGLE PLUG ASSY SMT RA molex					
		0.25 OVER 0.5 UNDER		± 0.05	SSHIMONISHI 2016/11/17							
		0.5 OVER 1.0 UNDER		± 0.1	CHECKED BY KOMURAKAMI 2016/11/17							
		1.0 OVER 10 UNDER		± 0.2	APPROVED BY TKANEKO 2016/12/13		DOCUMENT NO. SD-505567-011 SHEET NO. 1 OF 2					
		10 OVER 30 UNDER		± 0.25	MATERIAL NO.							
		30 OVER		± 0.3	SEE SHEET 2							
		ANGULAR ±1 °										
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

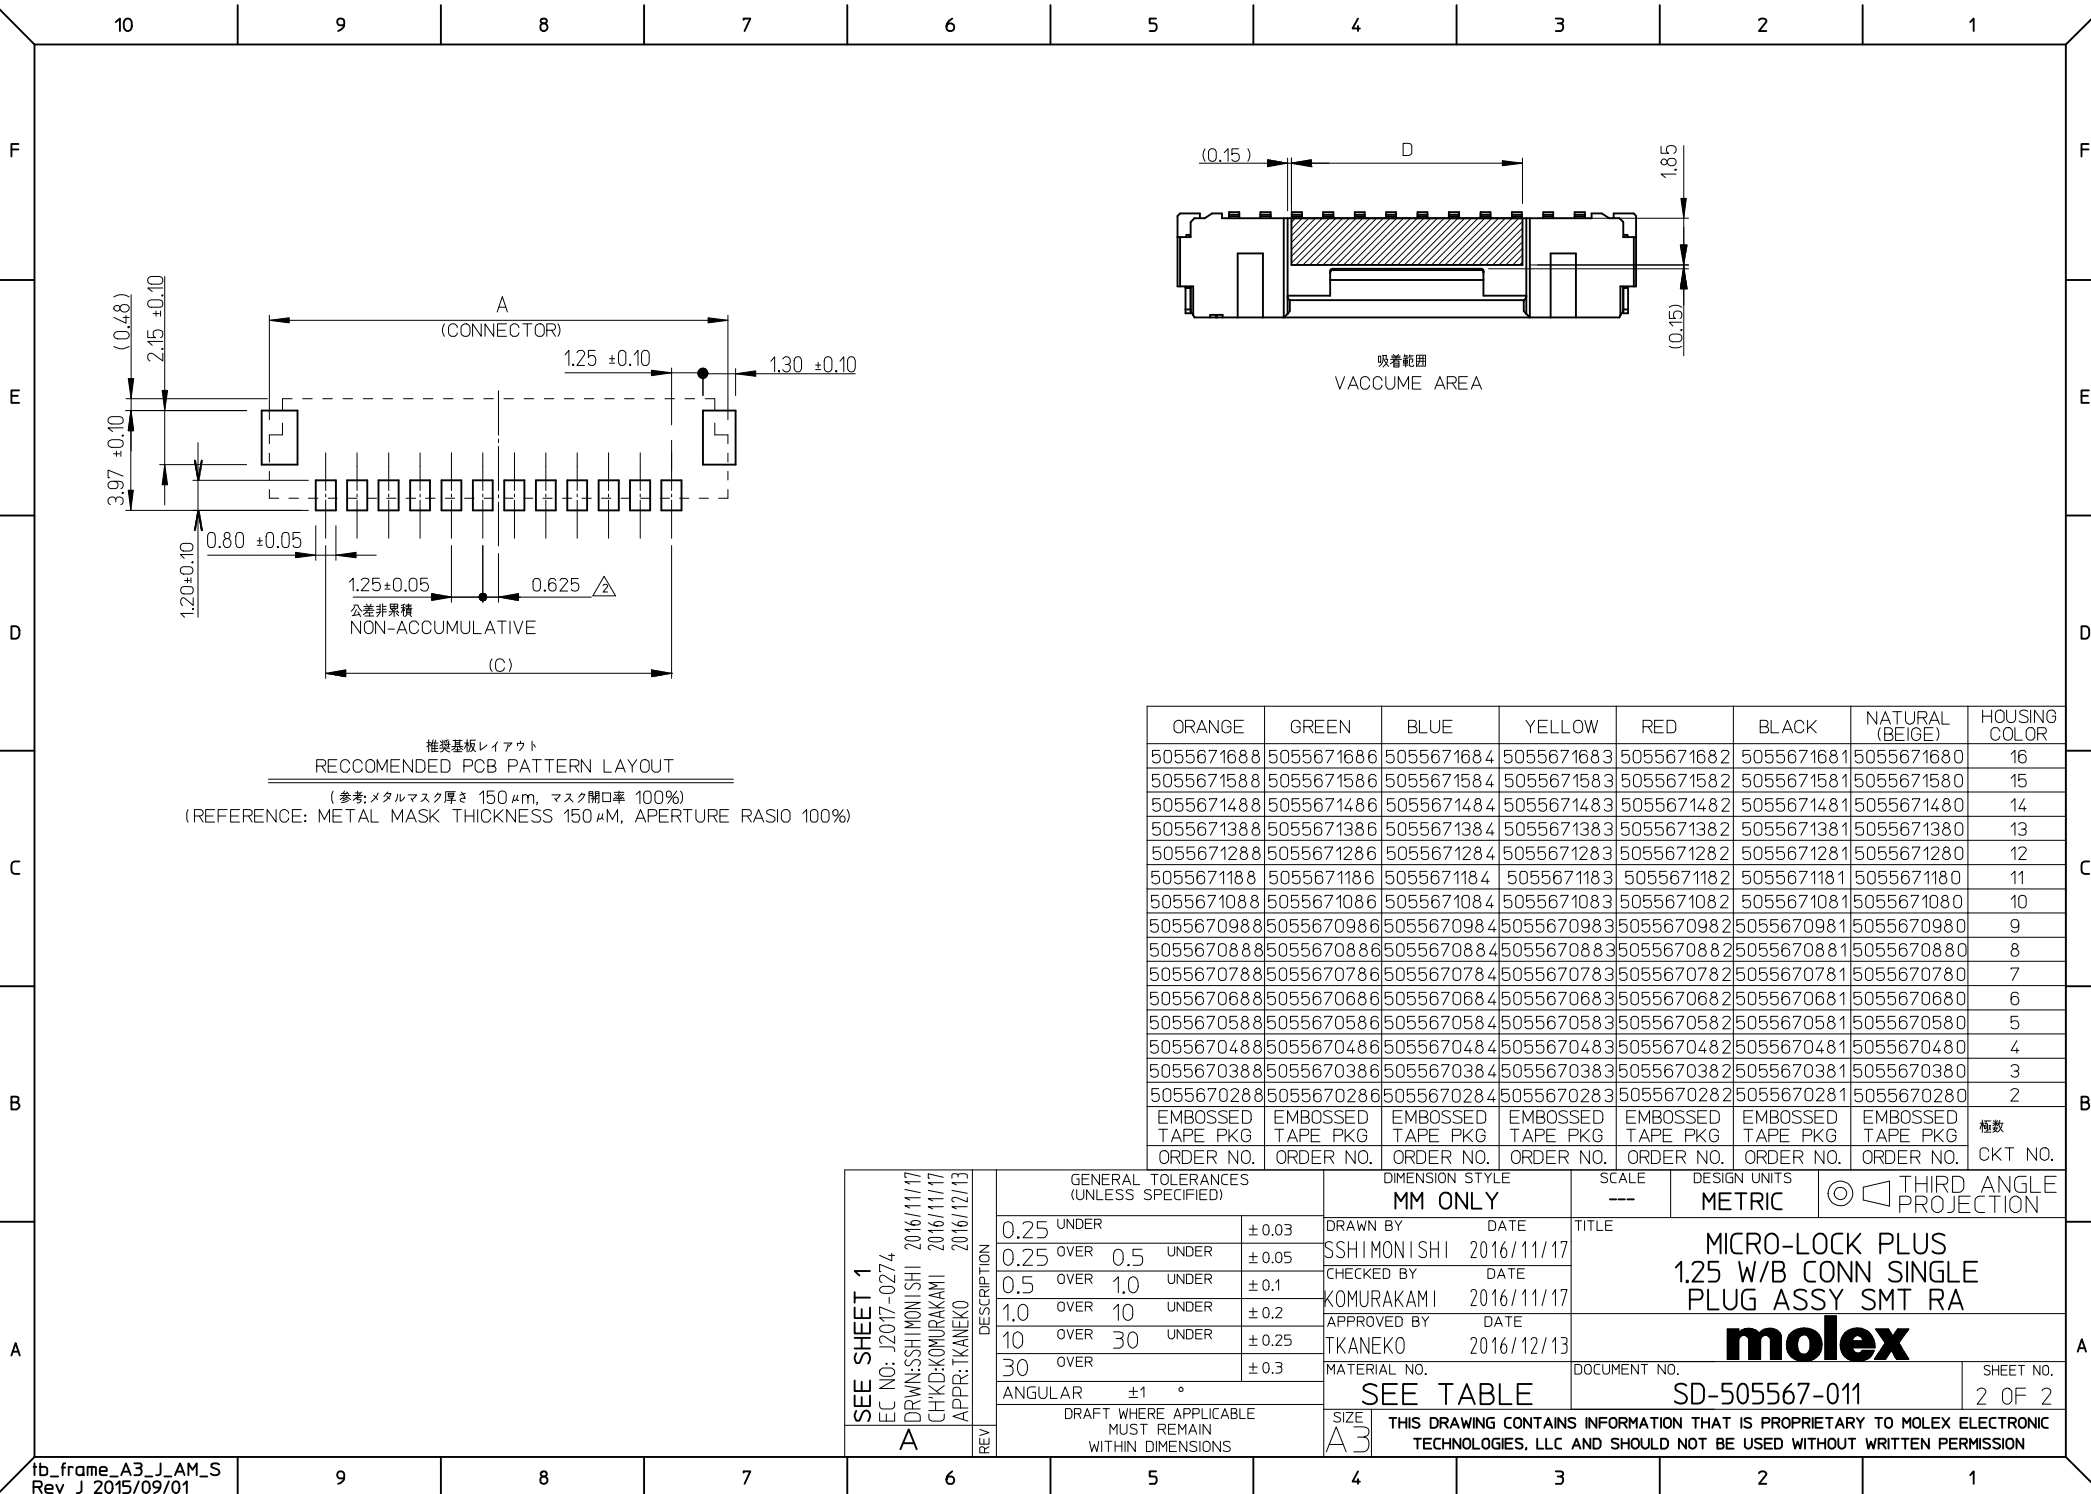

F

E

D

C

B

A

F



E

D

C

B

A

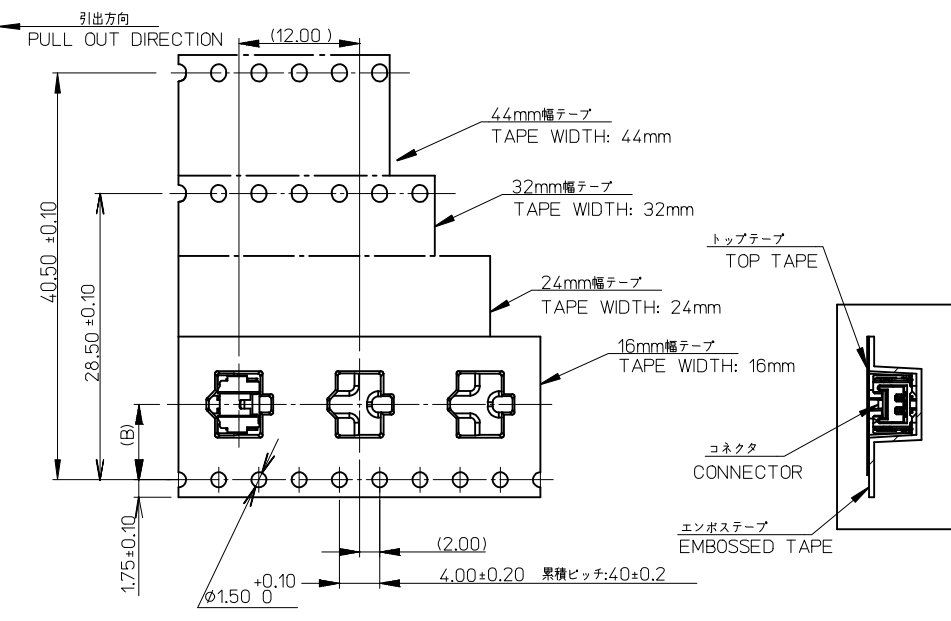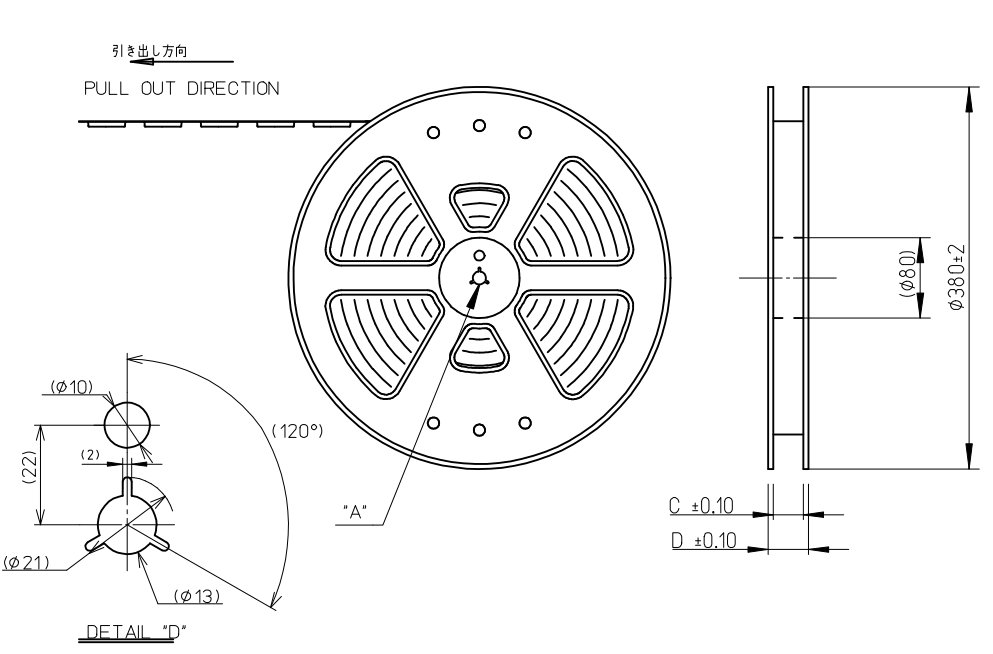


NOTES

1. 製品詳細寸法については、製品単体図面を参照下さい。
THE DETAIL DIMENSION REFER TO SALES DRAWING OF CONNECTOR ITSELF (NOT PACKAGED).
2. 梱包数量 : 1200個/リール
NUMBER OF CONNECTORS : 1200 PCS/REEL.
3. リードテープ長さ LEAD TAPE LENGTH.

引き出し方向
PULL OUT DIRECTION

トップテープ接着部(空エンボス)
TOP TAPE BONDED PART.(EMPTY)

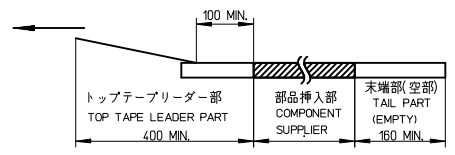

4. トップテープの剥離強度はIEC60286-3に準拠
TOP TAPE PEELING FORCE IS DEFINED BY IEC60286-3.

5. 材料 MATERIAL

キャリアテープ (CARRIER TAPE): ポリスチレン (POLYSTYRENE)
トップテープ(TOP TAPE): PET
リール (REEL) : ポリスチレン <リサイクル材含む> (PS)
POLYSTYRENE (PS)<RECYCLE MATERIAL CONTAINED>

6. ELV及びRoHS適合品

ELV AND RoHS COMPLIANT

49.4	45.4	20.2	44	505567168*	16
49.4	45.4	20.2	44	505567158*	15
49.4	45.4	20.2	44	505567148*	14
37.4	33.4	14.2	32	505567138*	13
37.4	33.4	14.2	32	505567128*	12
37.4	33.4	14.2	32	505567118*	11
37.4	33.4	14.2	32	505567108*	10
29.4	25.4	11.5	24	505567098*	9
29.4	25.4	11.5	24	505567088*	8
29.4	25.4	11.5	24	505567078*	7
29.4	25.4	11.5	24	505567068*	6
29.4	25.4	11.5	24	505567058*	5
29.4	25.4	11.5	24	505567048*	4
21.4	17.4	7.5	16	505567038*	3
21.4	17.4	7.5	16	505567028*	2

D	C	B	エンボステープ幅 WIDTH OF TAPE A	エンボス梱包 EMBOSSED TAPE PACKAGE オーダー番号 ORDER NO.	極数 CKT NO.
---	---	---	--------------------------------	--	---------------

RELEASED EC NO: J2017-0274 DRWN:SSHIMONISHI 2016/11/21 CHKD:KOMURAKAMI 2016/11/21 APPR:TKANEKO 2016/12/13 A	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION						
		0.25 UNDER		±0.03	DRAWN BY	DATE	TITLE MICRO-LOCK PLUS 1.25 W/B SINGLE ROW RA SMT EMBOSSED TAPE PKG							
		0.25 OVER 0.5 UNDER		±0.05	SSHIMONISHI	2016/11/21								
		0.5 OVER 1.0 UNDER		±0.1	CHECKED BY	DATE	molex							
		1.0 OVER 10 UNDER		±0.2	KOMURAKAMI	2016/11/21								
		10 OVER 30 UNDER		±0.25	APPROVED BY	DATE					DOCUMENT NO. SD-505567-012			
		30 OVER		±0.3	TKANEKO	2016/12/13								
		ANGULAR ±1 °		MATERIAL NO.			SHEET NO. 1 OF 2							
				SEE SHEET 2										
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

