

NOTES

1. 材質

MATERIAL

ハウジング : ガラス入りLCP、黒色、UL94V-0
HOUSING: GLASS FILLED LIQUID CRYSTAL POLYMER, BLACK, UL94V-0

ターミナル : 銅合金
TERMINAL: COPPER ALLOY

シールド : ステンレス鋼
SHIELD: STAINLESS STEEL

ネイル : 銅合金
NAIL: COPPER ALLOY

吸着テープ : 耐熱樹脂
VACUUM TAPE: HEAT RESISTING RESIN

2. めっき仕様



ターミナル
TERMINAL

接点部 : 金めっき
CONTACT AREA : GOLD
半田付け部 : 錫めっき
SOLDER TAIL AREA : TIN
下地めっき : ニッケルめっき
UNDER-PLATING : NICKEL

ネイル
NAIL
ニッケル下地錫めっき
TIN OVER NICKEL PLATING

3. テールとネイルの平坦度 : 0.1MAX


COPLANARITY : 0.1 MAXIMUM



SECTION B-B

48.9	39.5	49.1	46.1	40.88	501493-1610	501493-1600	160
58.9	49.5	59.1	56.1	50.88	501493-2010	501493-2000	200
68.9	59.5	69.1	66.1	60.88	501493-2410	501493-2400	240
C	D	E	F	G	TRAY PACKAGE	CONNECTOR	CIRCUIT
					MATERIAL NO.		

REVISED EC NO: J2007-0487 DRAWN: YAOYAGI CHKD: THARUYAMA APPR: NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION
		10 UNDER	± 0.2	DRAWN BY YKOBAYASHI	DATE 2004/10/27	TITLE 0.5 B TO B CONN. SHIELD TYPE PLUG ASSY H=6			
		10 OVER 30 UNDER	± 0.25	CHECKED BY HHIRATA	DATE 2004/10/27				
		30 OVER	± 0.3	APPROVED BY MSASAO	DATE 2004/10/27				
		ANGULAR ±1 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-501493-001		1 OF 2		
D	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

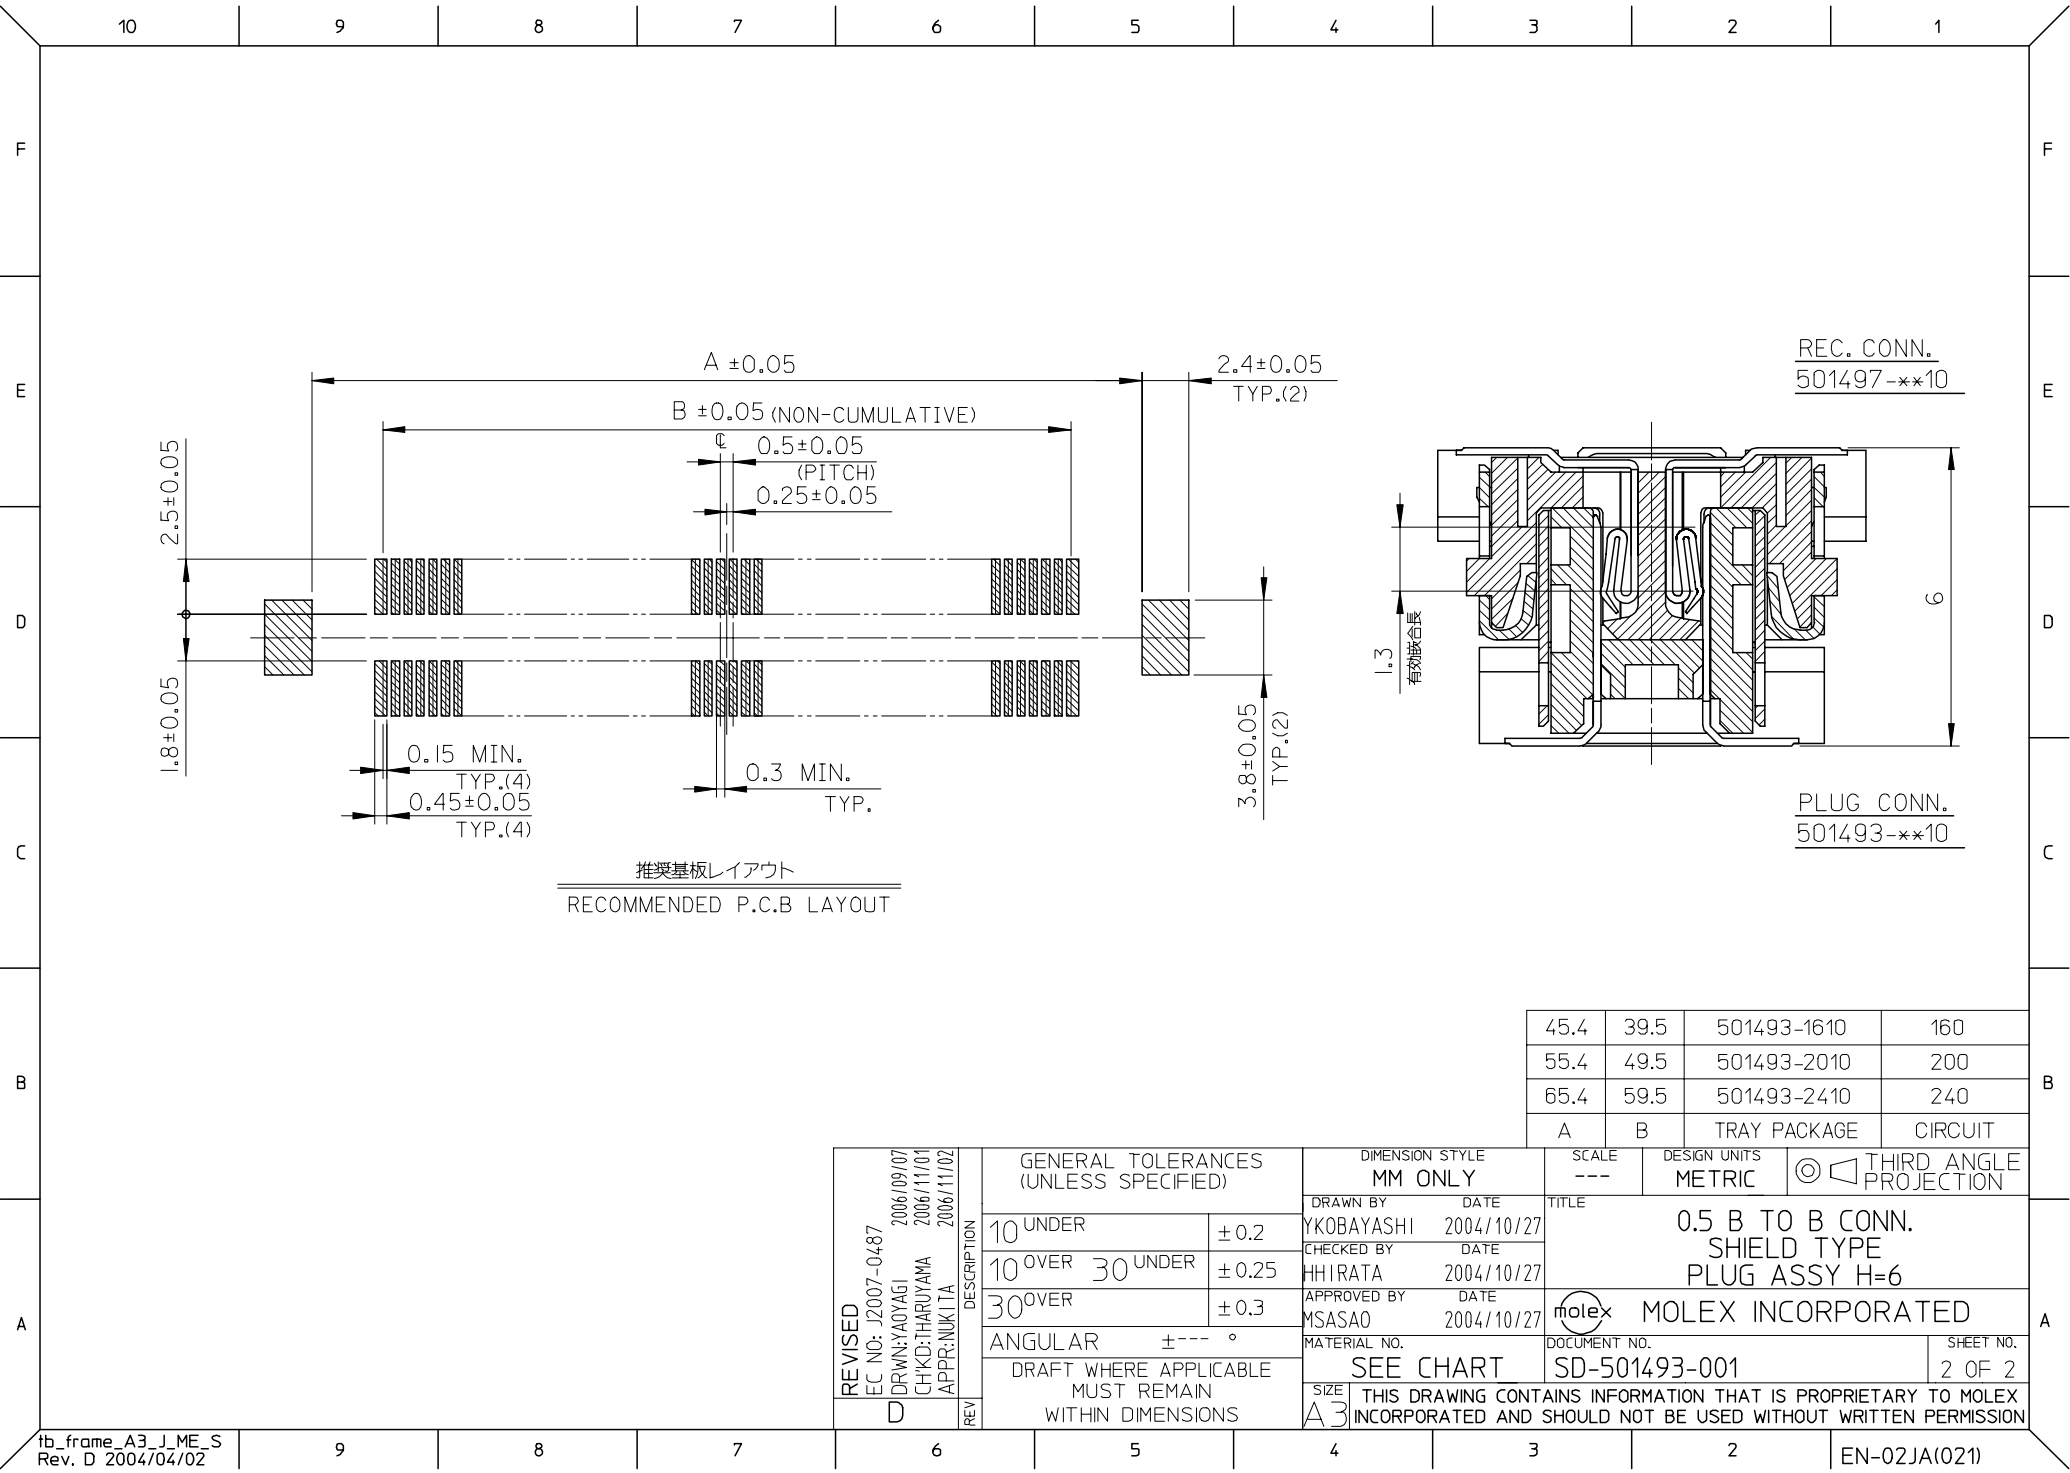

45.4	39.5	501493-1610	160
55.4	49.5	501493-2010	200
65.4	59.5	501493-2410	240
A	B	TRAY PACKAGE	CIRCUIT

REVISED EC NO: J2007-0487 D	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY YKOBAYASHI	DATE 2004/10/27	TITLE 0.5 B TO B CONN. SHIELD TYPE PLUG ASSY H=6				
		10 OVER 30 UNDER	±0.25	CHECKED BY HHIRATA	DATE 2004/10/27					
		30 OVER	±0.3	APPROVED BY MSASAO	DATE 2004/10/27	MOLEX MOLEX INCORPORATED				
		ANGULAR ±--- °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-501493-001		2 OF 2		
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F



E

D


C

B

A

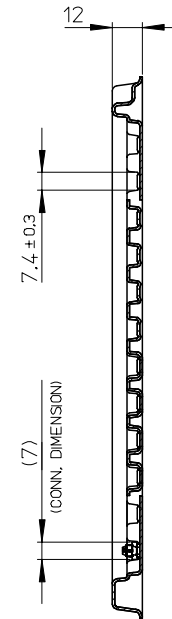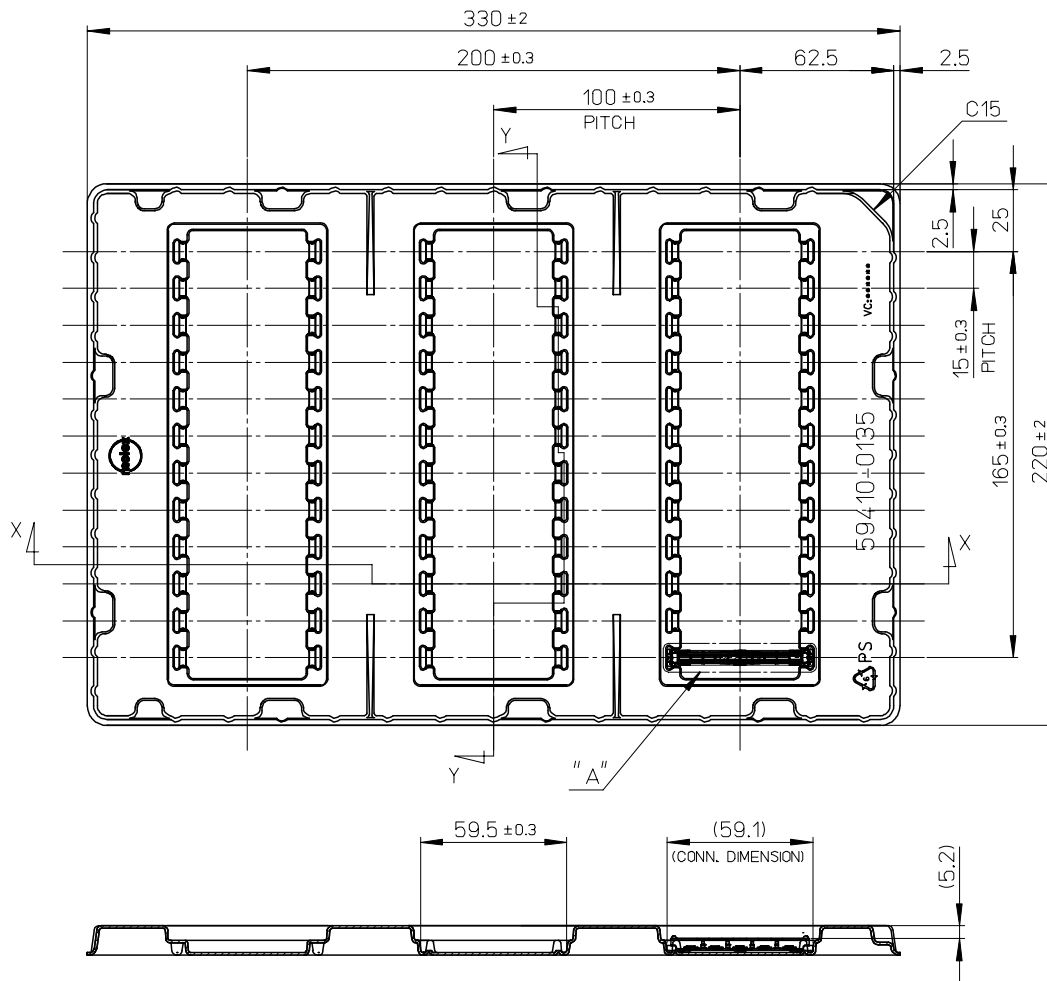

SECT. Y-Y

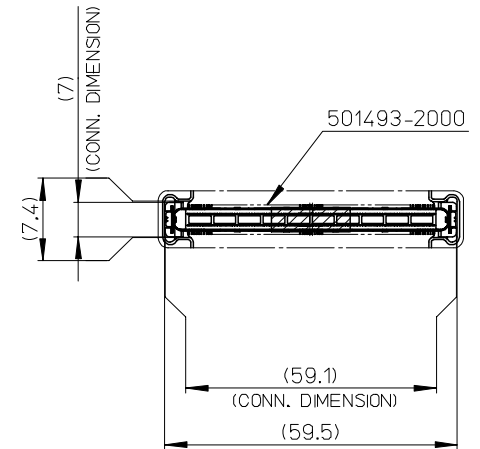

DETAIL "A"
(SCALE 1-1)

SECT. X-X

注記

- 一般公差: ±0.5
GENERAL TOLERANCES: ±0.5
- 各部の反りは1.5MAX.
WARP: 1.5MAX.
- 梱包数: 36個
PACKAGING QUANTITY: 36PCS.
- トレイは180°反転させて重ねる。
180 DEGREES IS REVERSED AND A TRAY IS PILED UP.

RELEASED EC NO: J2006-2011 DRWN:Y.TOKUZONO 2005/12/16 CHKD:T.HARUYAMA 2005/12/16 APPR:T.HARUYAMA 2005/12/16	DESCRIPTION REV 0	GENERAL TOLERANCES (UNLESS SPECIFIED) 10 UNDER ±0.2 10 OVER 30 UNDER ±0.25 30 OVER ±0.3 ANGULAR ±1 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
				MM ONLY		1:2	METRIC		
				DRAWN BY DATE		TITLE TRAY FOR 501493-2010 (0.5 B TO B CONN. SHIELD TYPE PLUG ASS'Y 200P H=6)			
				Y.TOKUZO 2005/12/15					
				CHECKED BY DATE		MOLEX INCORPORATED			
				T.HARUYA 2005/12/15					
APPROVED BY DATE		DOCUMENT NO. SD-501493-003							
N.UKITA 2005/12/15									
MATERIAL NO. 594100135						SHEET NO. 1 OF 1			
SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							