



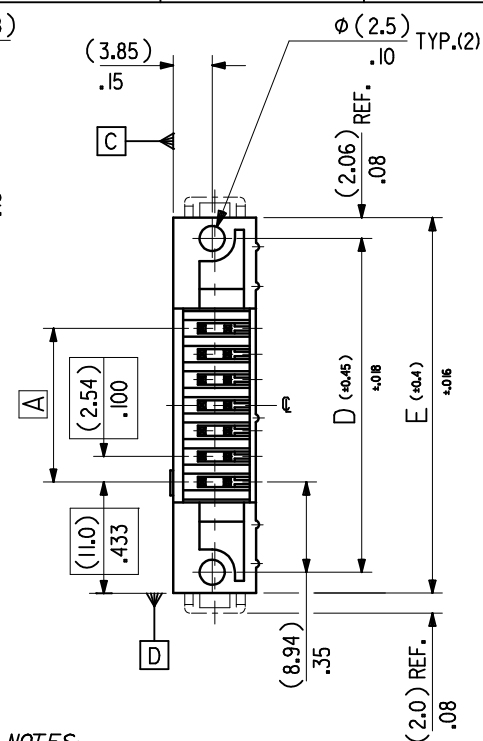


NOTES:

- 1: FOR MATERIAL SPECIFICATION SEE NOTE 1. ON SHEET 2.
- 2: FOR RECOMMENDED P.C.B.HOLE PATTERN, PART N^os AND UNSTATED DIMENSIONS SEE SHEET 2.
- 3: PRODUCT SPEC. No. :PS 99020-00/5

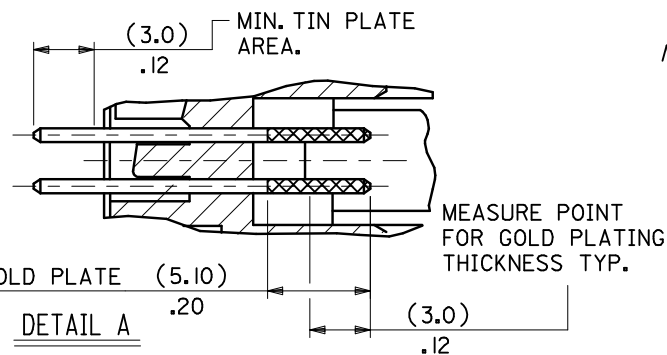

DIMENSIONS FOR SELECTIVE
PLATING'S, SCALE 4:1

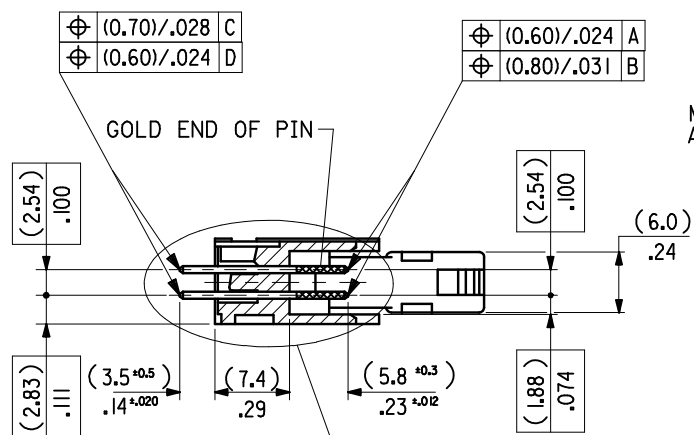

SECTION F-F

SEE DETAIL A.

CORRECTED DRAWING ERRORS EC NO: IPG2014-0939 DRWN:CMONAHAN 2013/11/15 CHK:DDBYRNES APPR:STRIFF IN 2013/12/02 DESCRIPTION	QUALITY SYMBOLS ▽ = ▽ =	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION					
			mm	INCH	DRAWN BY SM	DATE 3 /8/90	TITLE QIK FLECS						
		4 PLACES	± ---	± ---	CHECKED BY	DATE							
		3 PLACES	± ---	± ---	APPROVED BY EFOLAN			DATE 2010/08/25			WIPE FEMALE MOLEX MOLEX INCORPORATED		
		2 PLACES	± 0.15	± .005									
1 PLACE	± 0.20	± .008	MATERIAL NO. SEE SHEET 2			DOCUMENT NO. SDA-90571			SHEET NO. 1 OF 4				
ANGULAR ±1/2°													
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

(78.74)/3.100	(86.34)/3.400	(90.52)/3.564	(96.62)/3.804	(100.74)/3.966	90571-1641	90571-1642	90571-1643		64
(73.66)/2.900	(81.26)/3.200	(85.44)/3.364	(91.54)/3.604	(95.66)/3.766	↑ -1601	↑ -1602	↑ -1603		60
(60.96)/2.400	(68.56)/2.700	(72.74)/2.864	(78.84)/3.104	(82.96)/3.266	-1501	-1502	-1503	90571-1509	50
(48.26)/1.900	(55.86)/2.200	(60.04)/2.364	(66.14)/2.604	(70.26)/2.766	-1401	-1402	-1403	↑ -1409	40
(40.64)/1.600	(48.24)/1.900	(52.42)/2.064	(58.52)/1.304	(62.64)/2.466	-1341	-1342	-1343	-1349	34
(35.56)/1.400	(43.16)/1.700	(47.34)/1.864	(53.44)/2.104	(57.56)/2.266	-1301	-1302	-1303	-1309	30
(30.48)/1.200	(38.08)/1.500	(42.26)/1.664	(48.36)/1.904	(52.48)/2.066	-1261	-1262	-1263	-1269	26
(22.86)/.900	(30.46)/1.200	(34.64)/1.364	(40.74)/1.604	(44.86)/1.766	-1201	-1202	-1203	-1209	20
(17.78)/.700	(25.38)/1.000	(29.56)/1.164	(35.66)/1.404	(39.78)/1.566	-1161	-1162	-1163	-1169	16
(15.24)/.600	(22.84)/.900	(27.02)/1.064	(33.12)/1.304	(37.24)/1.466	↓ -1141	↓ -1142	↓ -1143	↓ -1149	14
(10.16)/.400	(17.76)/.700	(21.94)/.864	(28.04)/1.104	(32.16)/1.266	90571-1101	90571-1102	90571-1103	90571-1109	10
A	B	C	D	E	ENG. NO. GS1 PLATING	ENG. NO. GS2 PLATING	ENG. NO. GS3 PLATING	ENG. NO. PRE TIN	NO.OF CKTS.

NOTES

1. MATERIAL

HEADER : GLASS FILLED POLYESTER (UL 94V0), COLOUR - BLACK.

PINS : BRASS SIZE $\square$ (0.635)/.025 .

LEVER : GLASS FILLED POLYESTER (UL 94V0), COLOUR - BLACK.

2. PLATING OPTIONS.


90571-1**1, (1um)/39uin MIN. NICKEL UNDERPLATE. CONTACT AREA
GS1 PLATING (0.1um)/4uin MIN. GOLD. SOLDER AREA (3um)/118uin MIN. TIN.

90571-1**2, (1um)/39uin MIN. NICKEL UNDERPLATE. CONTACT AREA
GS2 PLATING (0.76um)/30uin MIN. GOLD. SOLDER AREA (3um)/118uin MIN. TIN.

90571-1**3, (1um)/39uin MIN. NICKEL UNDERPLATE. CONTACT AREA
GS3 PLATING (0.25um)/10uin MIN. GOLD. SOLDER AREA (3um)/118uin MIN. TIN.

90571-1**9, (0.5-1um)/20-40uin NICKEL UNDER (1.0-3.0um)/39-118uin TIN.
PRE-TIN

3. RECOMMENDED PCB THICKNESS 1.6mm

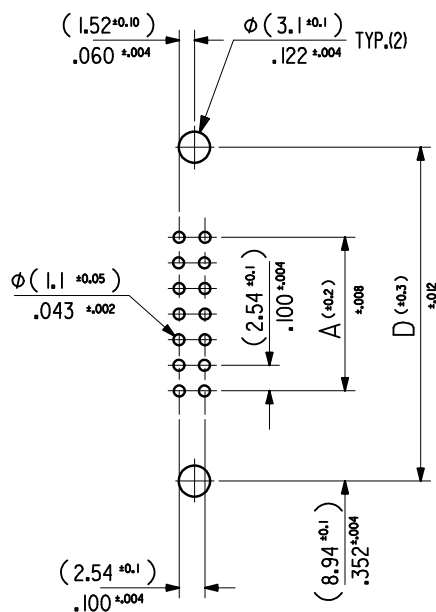

RECOMMENDED P.C.B. HOLE PATTERN.

REMOVED REF'S TO COLOUR STAMP EC NO: E2011-0063 DRWN: J O'CONNOR CHKD: APPR: EFOLAN	QUALITY SYMBOLS ▽ = 0 ▽ = 0	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION		
			mm		INCH		DRAWN BY SM SM		DATE 3 / 8 / 2010		TITLE QIK FLECS HEADER WITH DIN EJECT LEVERS FOR IMPROVED WIPE FEMALE MOLEX INCORPORATED	
			4 PLACES ± --- ± ---		3 PLACES ± --- ± ---		CHECKED BY X		DATE			
			2 PLACES ± 0.15 ± .005		1 PLACE ± 0.20 ± .008		APPROVED BY EFOXAN		DATE 2010/08/25			
			ANGULAR ± 1/2°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SDA-90571		2 OF 4			
			SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							