
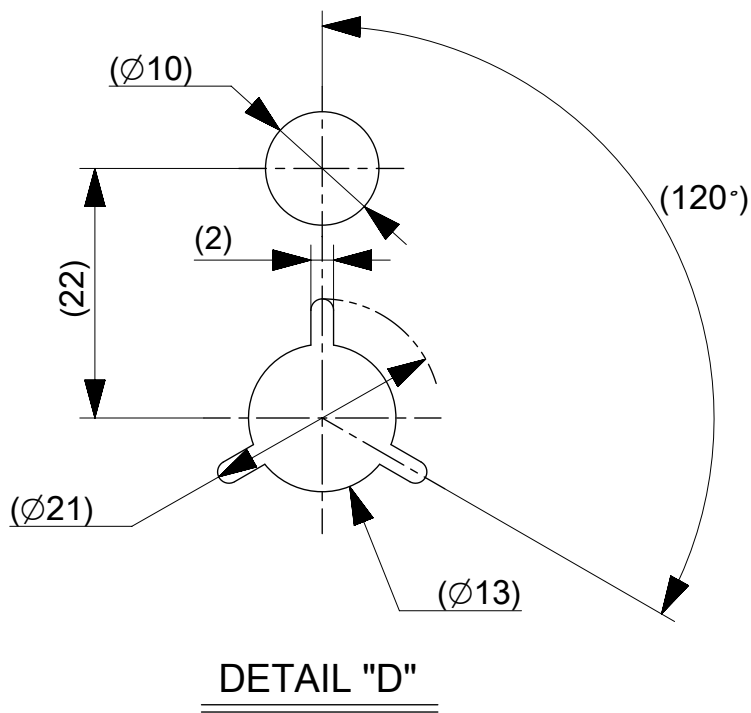
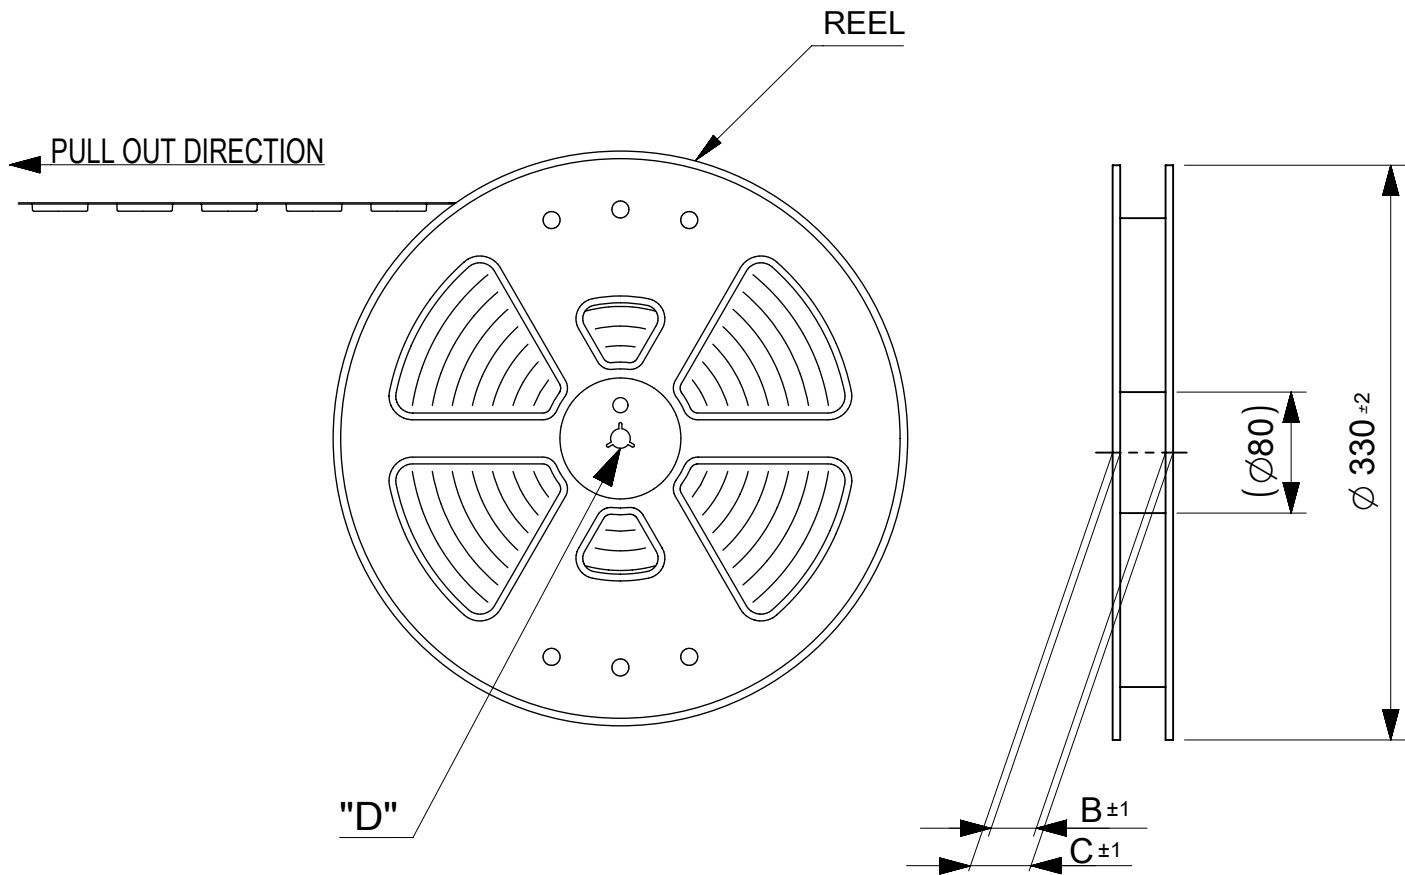







NOTES

- RE DETAILED DIMENSION, SEE PRODUCT DRAWING.
 - NUMBER OF CONNECTORS : 5000PCS/REEL
 - LEAD TAPE LENGTH
-
- TOP TAPE PEEL FORCE IS DEFINED BY IEC60286-3.
 - MATERIAL
CARRIER TAPE : POLYSTYRENE
TOP TAPE : PET , OTHER
REEL : POLYSTYRENE (PS) < RECYCLE MATERIAL CONTAINED >
 - ELV AND RoHS COMPLIANT

MODEL NO. 505274**40


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
EC NO: 103765 DRWN: NOKIMOTO CHK'D: RTAKEUCHI APPR: KMORIKAWA	2016/03/22 2016/03/24 2016/03/25	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex®									
				MM		1:1											
		ANGULAR TOL ± 3.0 °		DRWN BY		DATE		0.35 BB H=0.8 SSB8RP PLUG EMBSTP PKG									
				NOKIMOTO		2016/03/22											
		4 PLACES ± 0.03		CHK'D BY		DATE							PRODUCT CUSTOMER DRAWING				
				RTAKEUCHI		2016/03/24											
	3 PLACES ± 0.03		APPR BY		DATE		SERIES		MATERIAL NUMBER		CUSTOMER						
	2 PLACES ± 0.05		KMORIKAWA		2016/03/25												
	1 PLACE ± 0.1		DRAWING SIZE		THIRD ANGLE PROJECTION		505274		SEE CHART		GENERAL						
	0 PLACES ± 0.2		A3				DOCUMENT NUMBER		DOC TYPE		DOC PART		SHEET NUMBER				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		5052740000					PSD		001		1 OF 3						
A		REV															


RELEASE STATUS P1 RELEASE DATE 25.03.2016 07:36:55

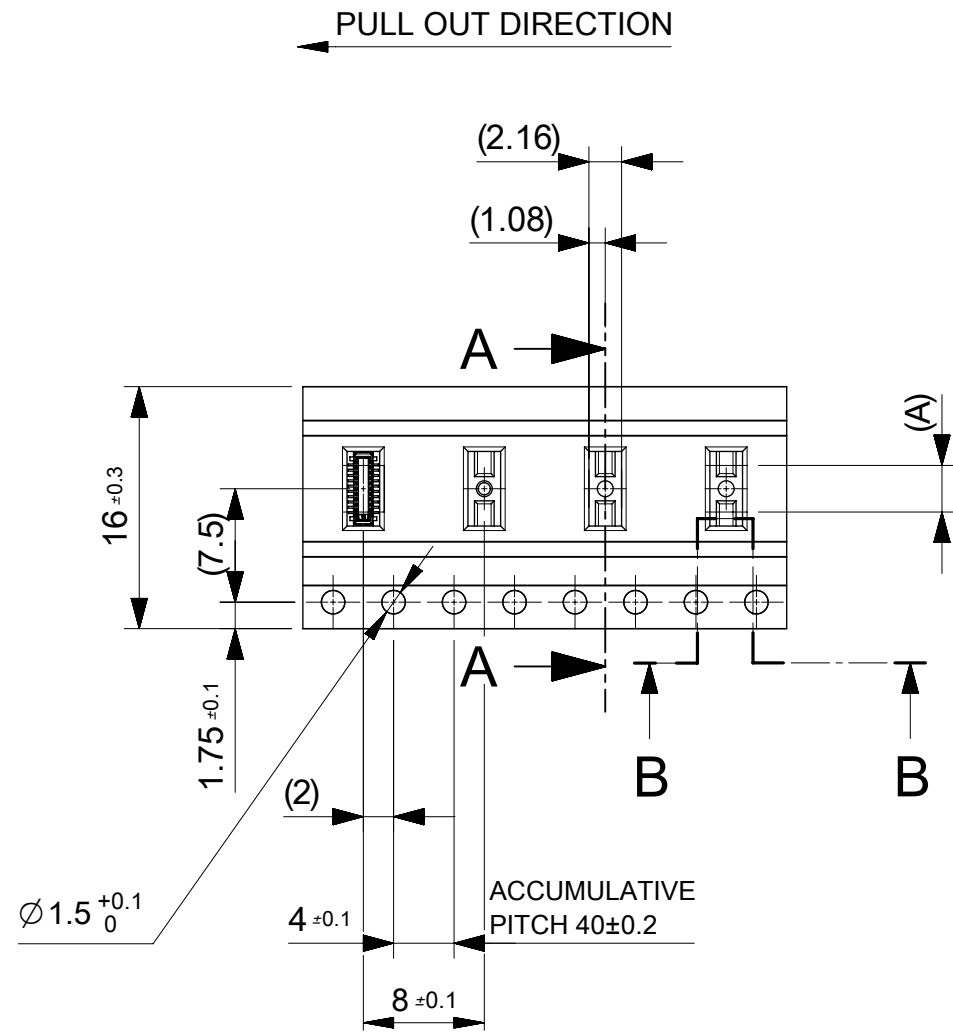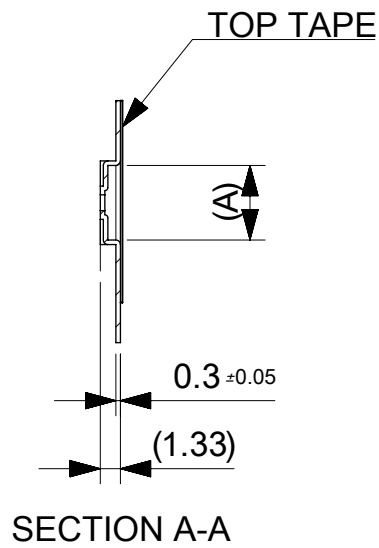



16	21.4	17.4	6.68	5052743040	○	---	30
			5.63	5052742440	○	---	24
			4.93	5052742040	○	---	20
			4.23	5052741640	○	---	16
			3.18	5052741040	○	---	10
			2.48	5052740640	○	---	6
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	EMBOSSED TAPE PACKAGE	HIGH VOL. TOOL	LOW VOL. TOOL	CIRCUIT
				ORDER NO.	SAMPLE PREPARATION ○:TOOLED △:WOOK IN PROCESS ---:TOOLING TO BE CONFIRMED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC NO: 103765 DRWN: NOKIMOTO CHK'D: RTAKEUCHI APPR: KMORIKAWA	2016/03/22	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION UNITS		SCALE		molex®					
	2016/03/24		MM		2:1							
	2016/03/25		ANGULAR TOL ± 3.0 °		DRWN BY		DATE		0.35 BB H=0.8 SSB8RP PLUG EMBSTP PKG			
	4 PLACES ± 0.03		NOKIMOTO		2016/03/22							
	3 PLACES ± 0.03		CHK'D BY		DATE							
	2 PLACES ± 0.05		RTAKEUCHI		2016/03/24							
	1 PLACE ± 0.1		APPR BY		DATE							
	0 PLACES ± 0.2		KMORIKAWA		2016/03/25		PRODUCT CUSTOMER DRAWING					
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE		THIRD ANGLE PROJECTION		SERIES	MATERIAL NUMBER		CUSTOMER		
	A		REV	A3				505274	SEE CHART		GENERAL	
				DOCUMENT NUMBER		DOC TYPE	DOC PART	SHEET NUMBER				
						5052740000		PSD	001	2 OF 3		

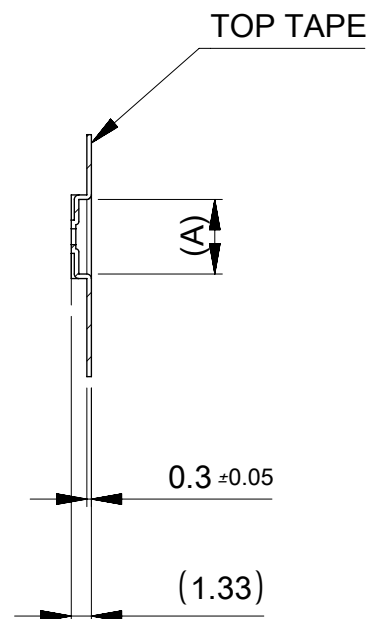

SECTION C-C

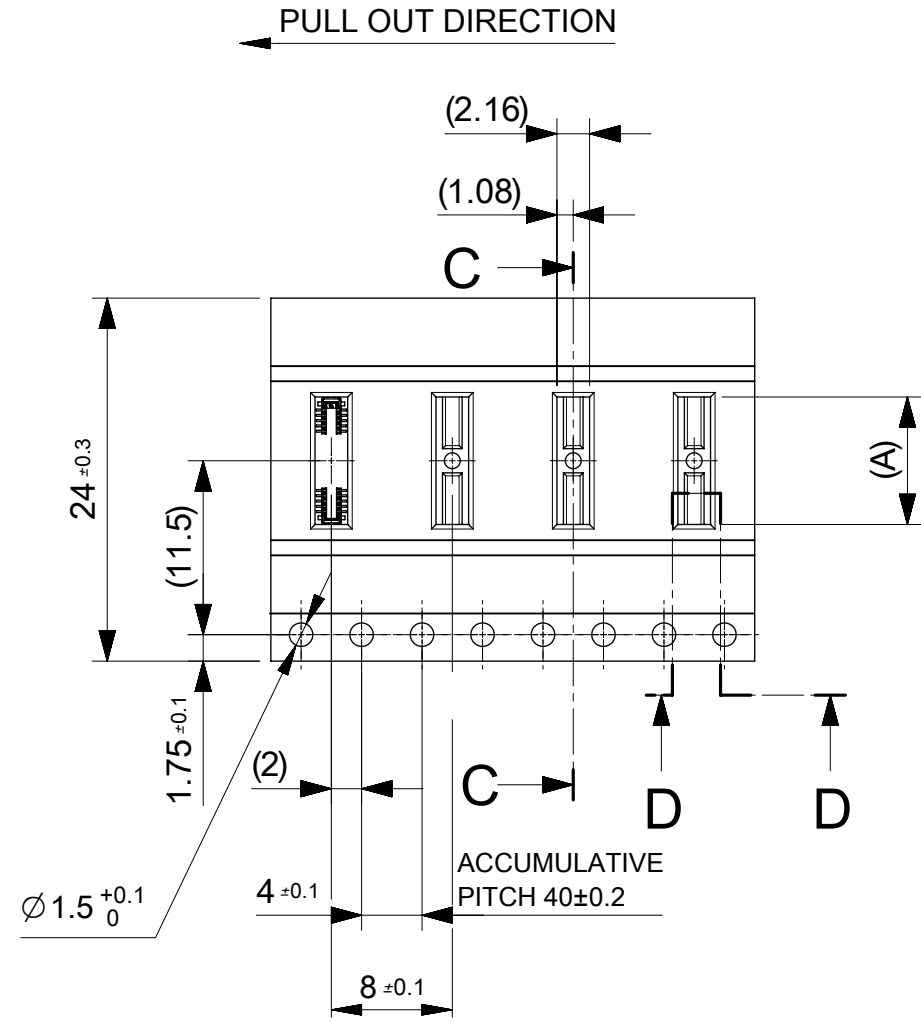

SECTION D-D

24	29.4	25.4	10.88	5052745440	○	---	54
			10.18	5052745040	---	○	50
			9.13	5052744440	---	---	44
			8.43	5052744040	○	---	40
			7.38	5052743440	○	---	34
			7.03	5052743240	---	---	32
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	EMBOSSED TAPE PACKAGE	HIGH VOL. TOOL	LOW VOL. TOOL	CIRCUIT
				ORDER NO.	SAMPLE PREPARATION ○:TOOLED △:WOOK IN PROCESS ---:TOOLING TO BE CONFIRMED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

2016/03/22
2016/03/24
2016/03/25

EC NO: 103765
DRWN: NOKIMOTO
CHK'D: RTAKEUCHI
APPR: KMORIKAWA

REV

GENERAL
TOLERANCES
(UNLESS SPECIFIED)

ANGULAR TOL ± 3.0 °

4 PLACES	± 0.03
3 PLACES	± 0.03
2 PLACES	± 0.05
1 PLACE	± 0.1
0 PLACES	± 0.2

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION UNITS
MM

SCALE
2:1

DRWN BY
NOKIMOTO

DATE
2016/03/22

CHK'D BY
RTAKEUCHI

DATE
2016/03/24

APPR BY
KMORIKAWA

DATE
2016/03/25

DRAWING SIZE
A3


THIRD ANGLE PROJECTION



molex®

0.35 BB H=0.8 SSB8RP PLUG EMBSTP PKG


PRODUCT CUSTOMER DRAWING

SERIES 505274	MATERIAL NUMBER SEE CHART	CUSTOMER GENERAL
DOCUMENT NUMBER 5052740000		DOC TYPE PSD
DOC PART 001		SHEET NUMBER 3 OF 3

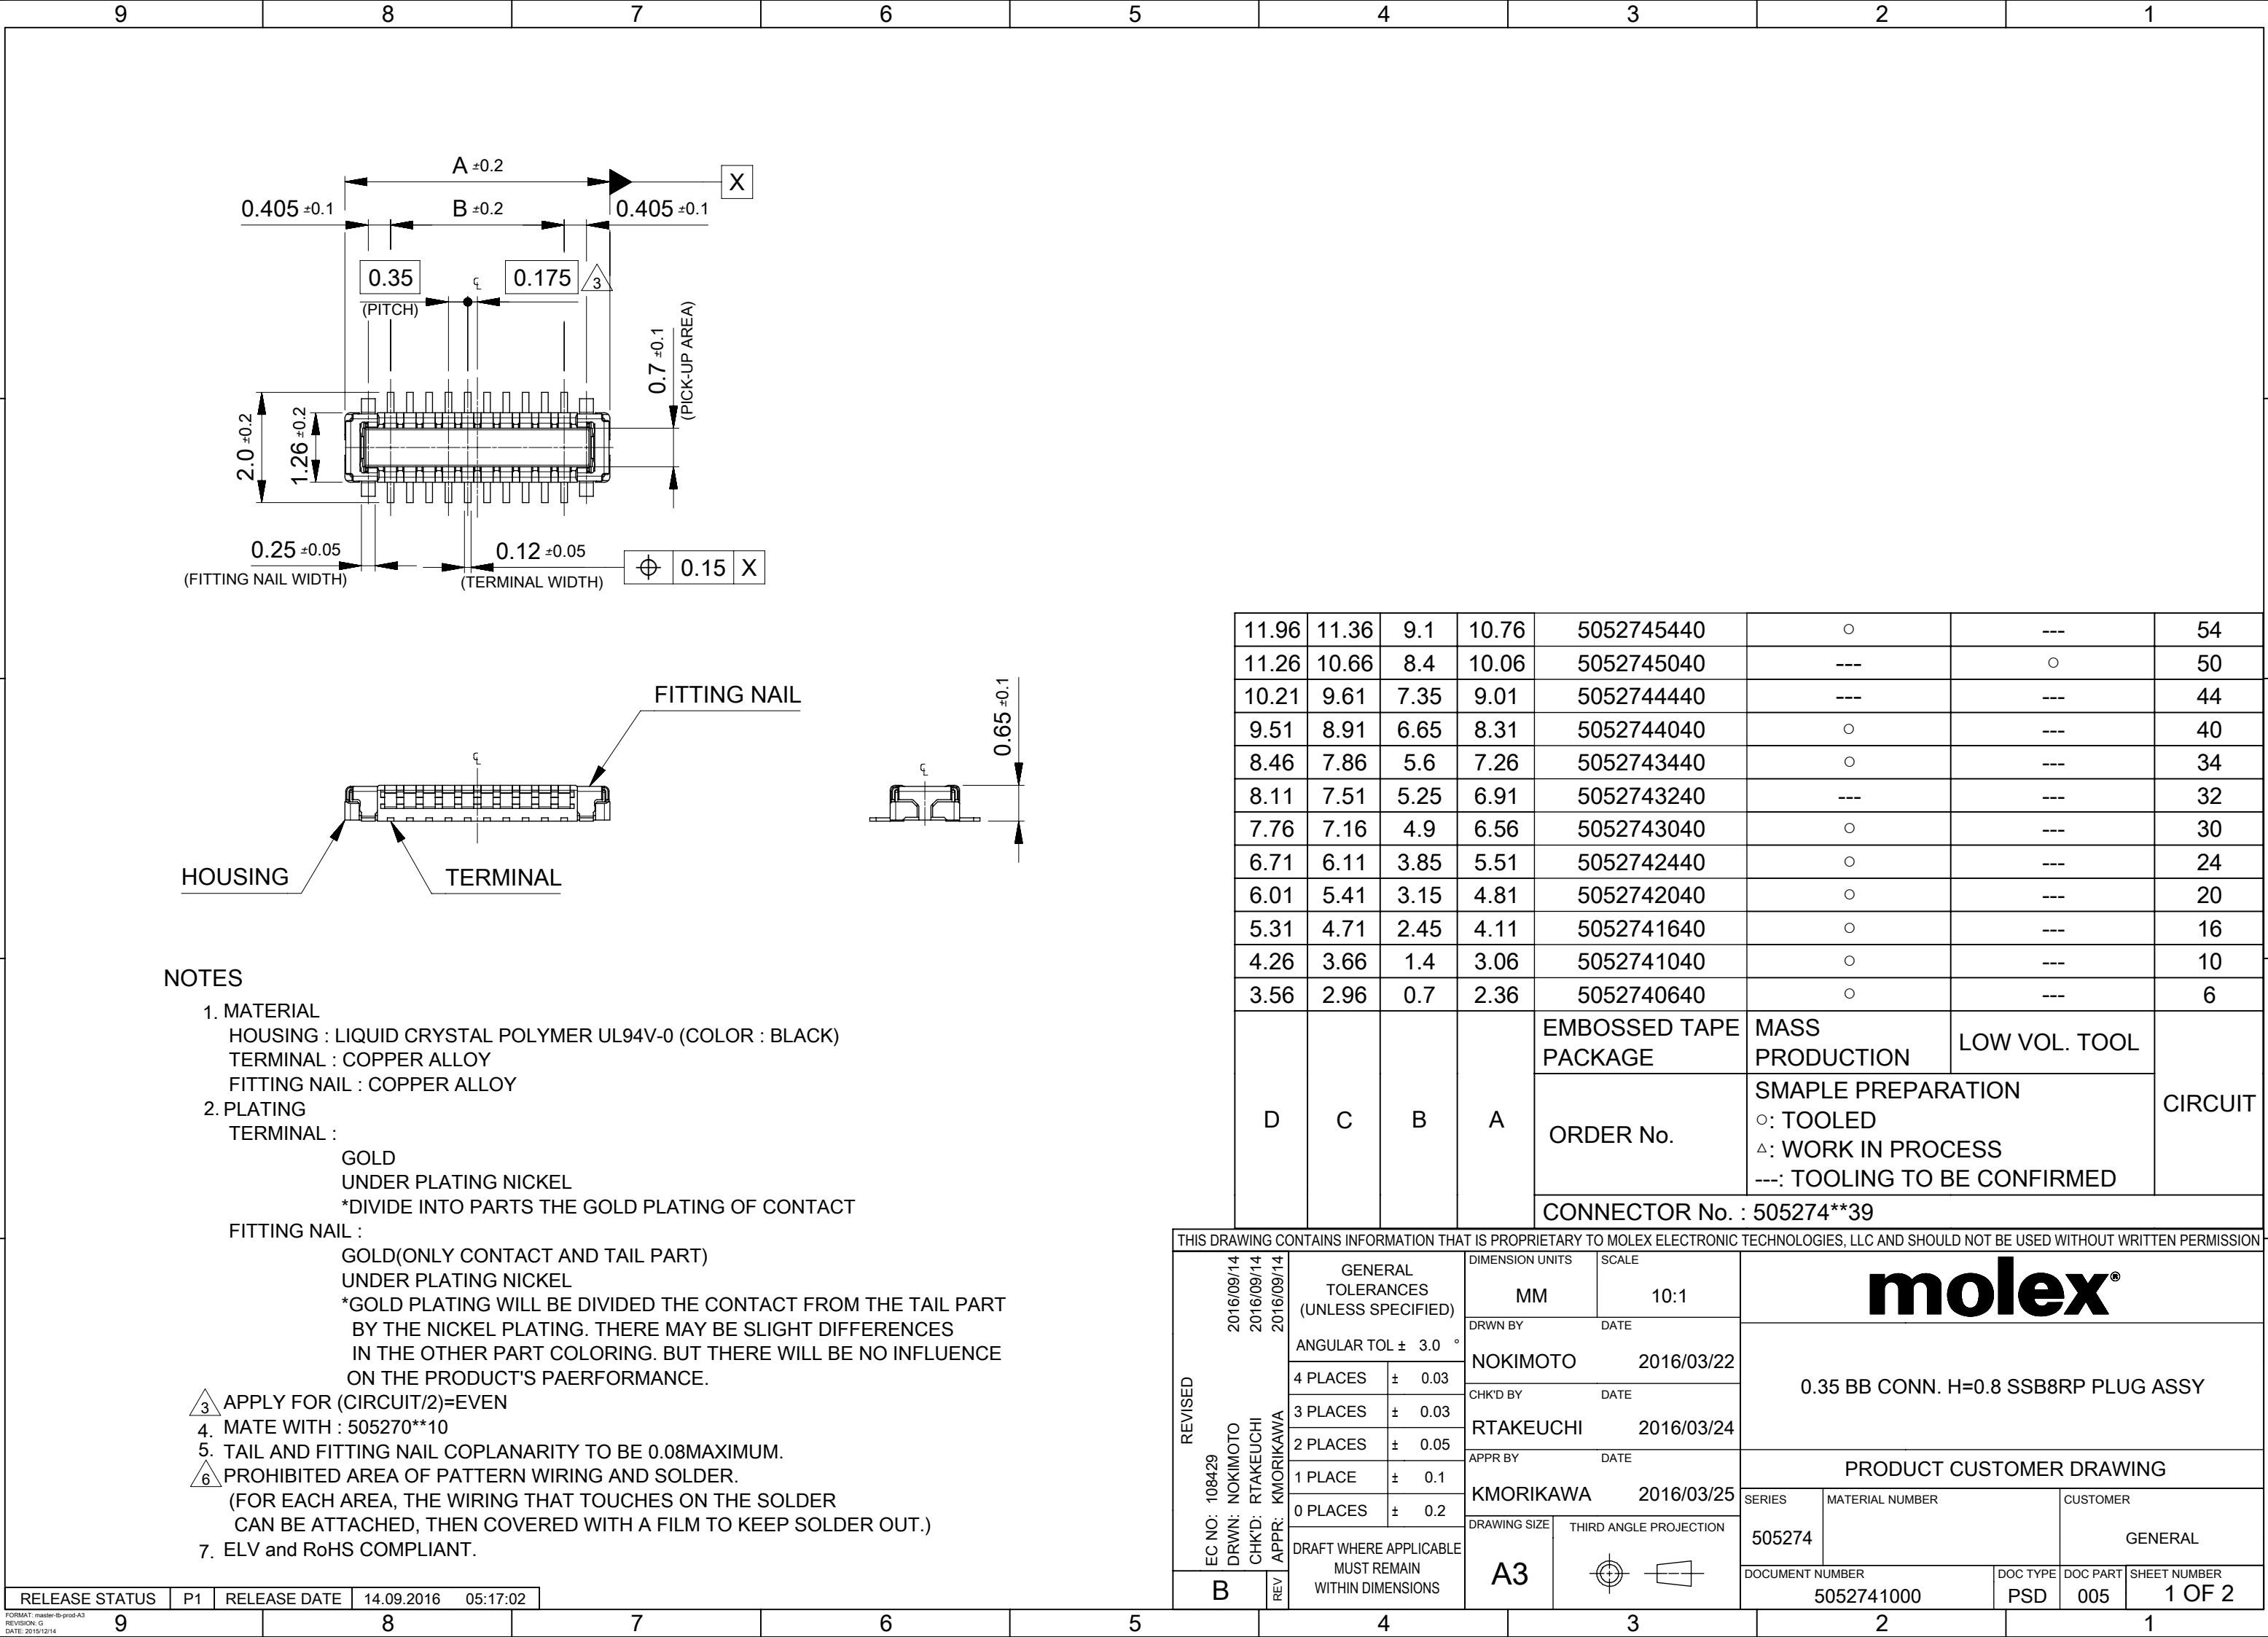

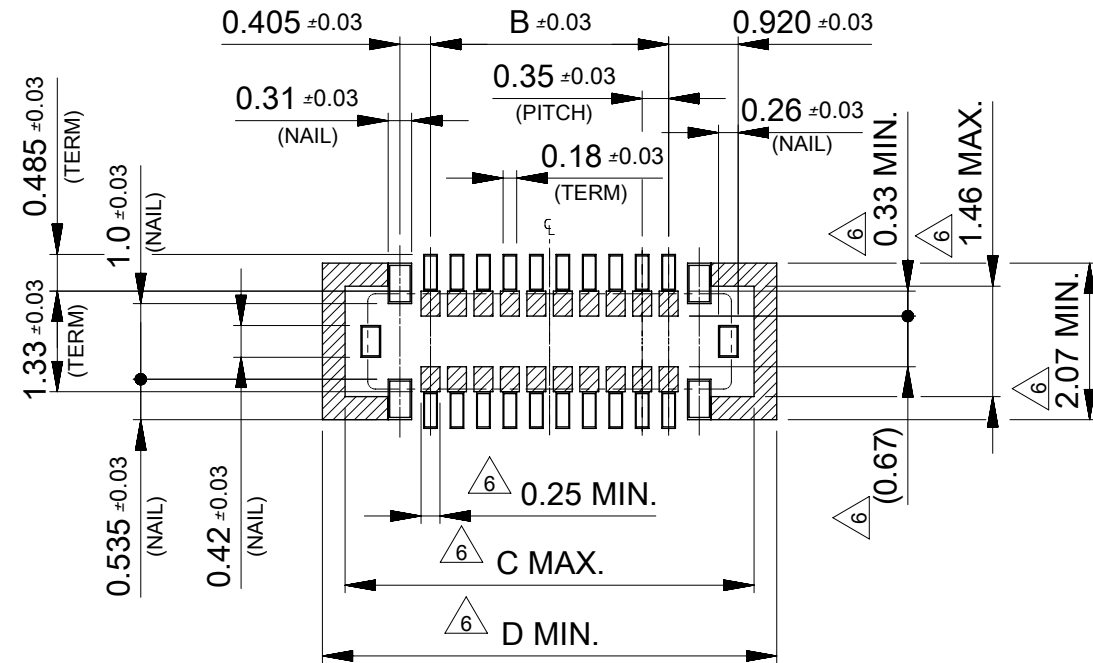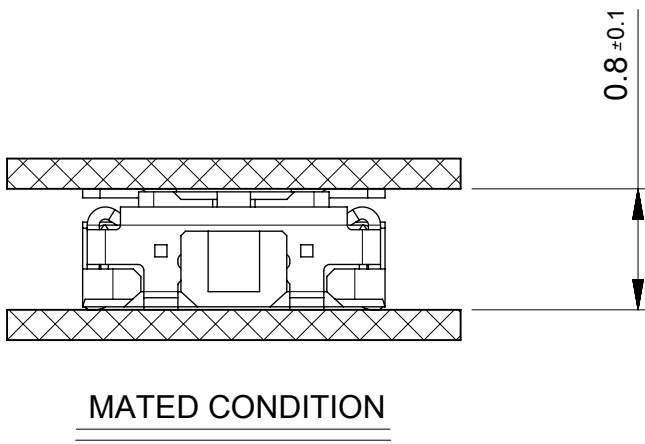


RECOMMENDED P.W.BOARD PATTERN LAYOUT (REFERENCE)

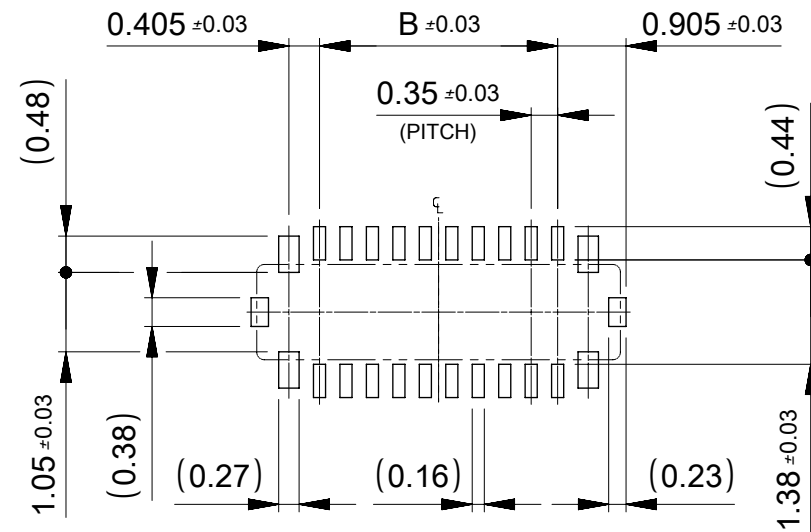

RECOMMENDED METAL MASK LAYOUT (REFERENCE)

RECOMMENDED THICKNESS OF METAL MASK : t=0.08mm
RECOMMENDED OPEN APERTURE RATIO OF METAL MASK : 80%

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
REVISED	EC NO: 108429 DRWN: NOKIMOTO CHK'D: RTAKEUCHI APPR: KMORIKAWA	2016/09/14 2016/09/14 2016/09/14	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS		SCALE		molex®					
			ANGULAR TOL ± 3.0 °		MM		10:1							
			4 PLACES ± 0.03		DRWN BY		DATE		0.35 BB CONN. H=0.8 SSB8RP PLUG ASSY					
			3 PLACES ± 0.03		NOKIMOTO		2016/03/22							
			2 PLACES ± 0.05		CHK'D BY		DATE							
			1 PLACE ± 0.1		RTAKEUCHI		2016/03/24							
			0 PLACES ± 0.2		APPR BY		DATE		PRODUCT CUSTOMER DRAWING					
					KMORIKAWA		2016/03/25							
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE		THIRD ANGLE PROJECTION		SERIES		MATERIAL NUMBER		CUSTOMER	
					A3				505274				GENERAL	
					DOCUMENT NUMBER		DOC TYPE		DOC PART					
					5052741000		PSD		005					
B	REV		SHEET NUMBER 2 OF 2											