

10

9

8

7

6

5








4

3

2

1

ELV AND RoHS COMPLIANT.

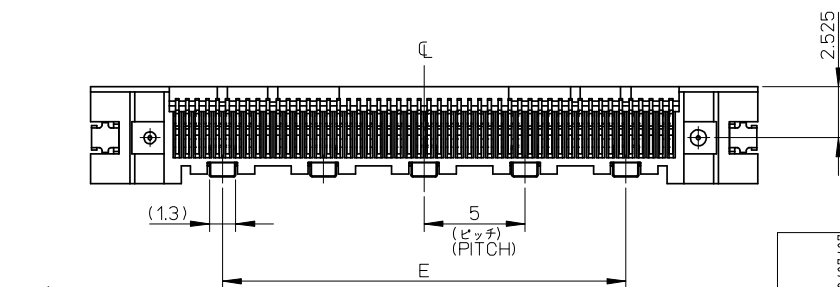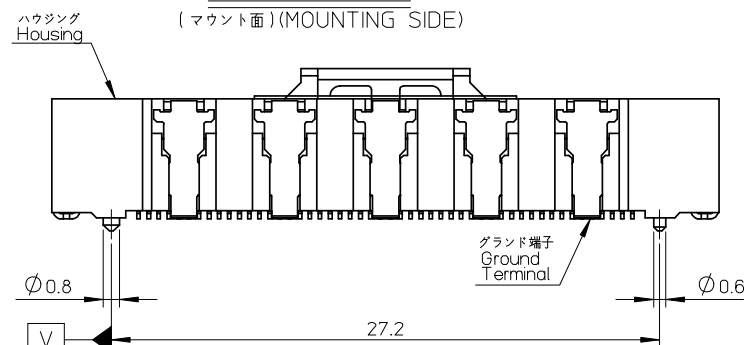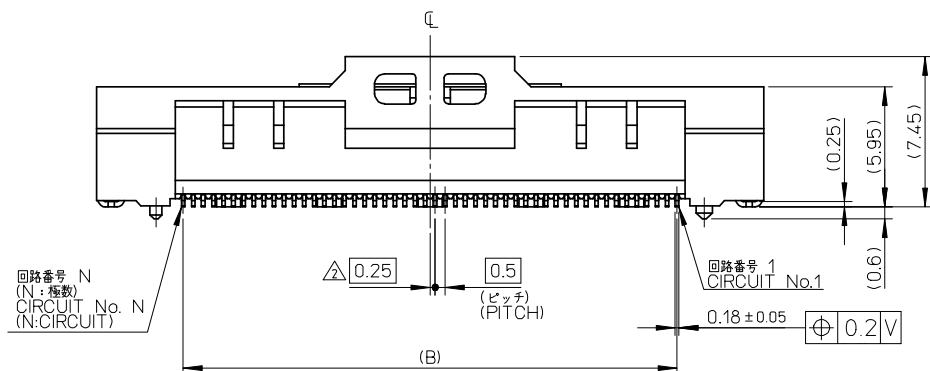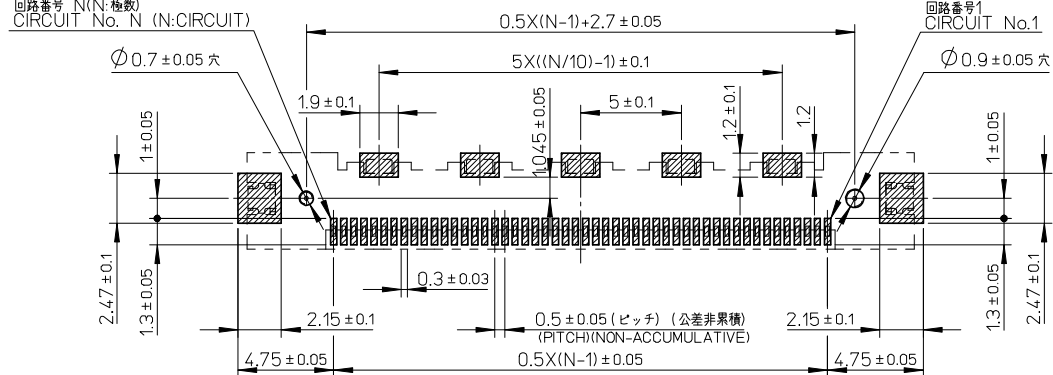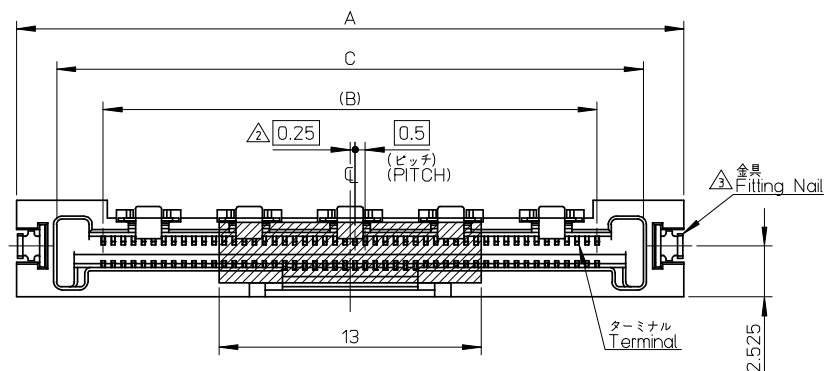回路番号 N (N:極数)
CIRCUIT No. N (N:CIRCUIT)

5	20	27.2	29.1	24.5	33.1	501786-5081	501786-5051	50
QTY of Term	E	D	C	B	A	EMBOSSD TAPE	MATERIAL NO.	極 数
						ORDER No. オーダー番号		

RELEASED	EC NO: 0	DESCRIPTION REV	2008/07/07 2008/07/09 2008/07/10	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1/1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
				10 UNDER	± 0.2	DRAWN BY M.NABEI	DATE '08/07/07	TITLE 0.5 FFC TO BOARD CONN REC HSG ASSY (ST)			
				10 OVER 30 UNDER	± 0.25	CHECKED BY K.MORIKAWA	DATE '08/07/07				
				30 OVER	± 0.3	APPROVED BY H.HIRATA	DATE '08/07/07				
				ANGULAR ±1 °		MATERIAL NO. SEE TABLE					DOCUMENT NO. SD-501786-010
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

9

8

7

6

5





4

3

2

10 9 8 7 6 5 4 3 2 1

ELV AND RoHS COMPLIANT.

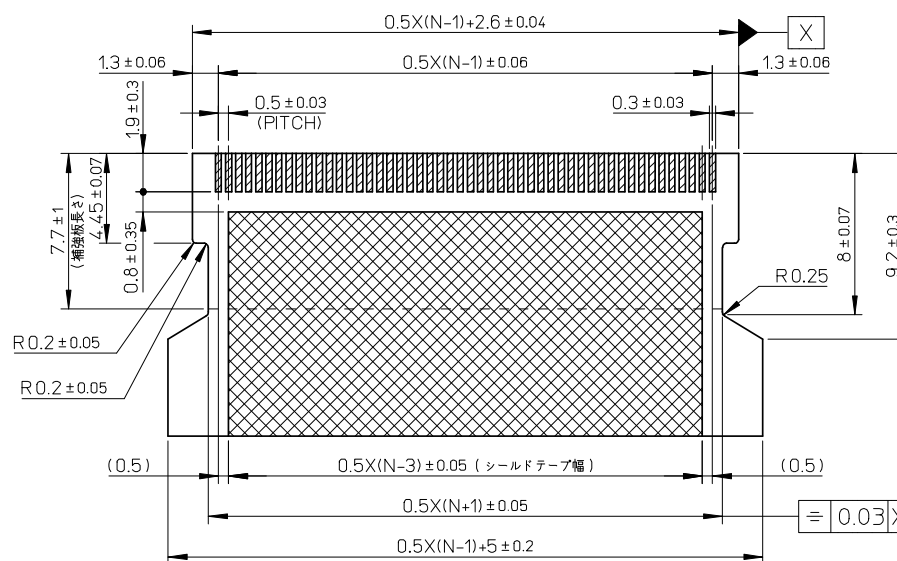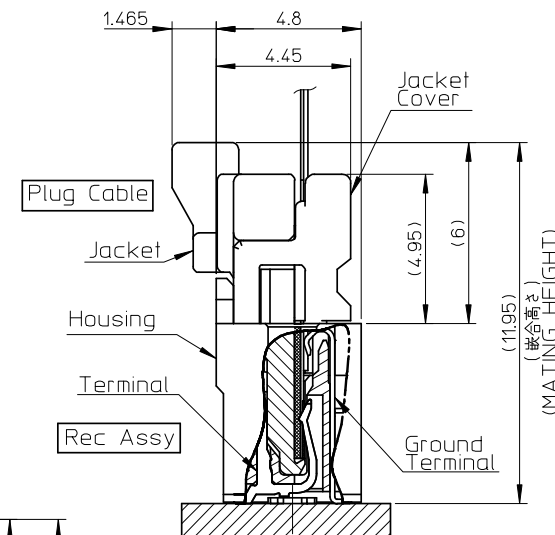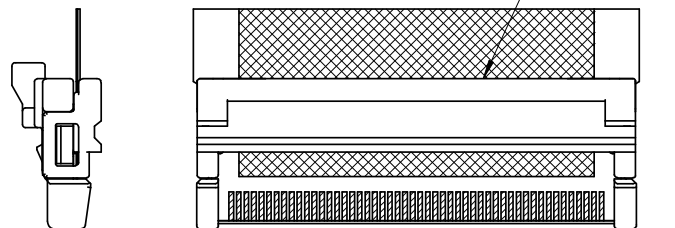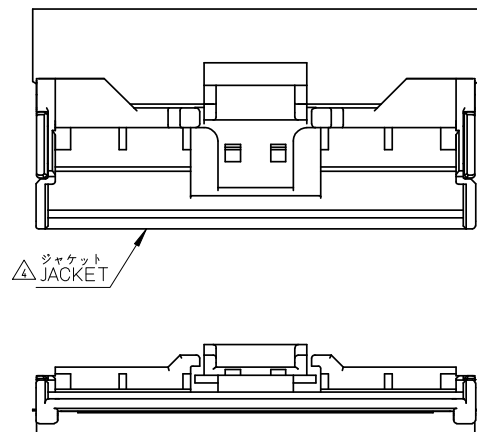

注記
NOTE

1. 使用材料 MATERIAL

ハウジング HOUSING	液晶ポリマー (LCP), ガラス充填, UL94V-0 色: 黒色 LIQUID CRYSTAL POLYMER(LCP), GLASS FILLED,UL94V-0 COLOR:BLACK
ターミナル TERMINAL	銅合金 (τ=0.18) COPPER ALLOY (τ=0.18)
メッキ PLATING	
ソルダーテール	ニッケル下地 銅ビスマメッキ
TAIL AREA	Sn-Bi PLATING OVER NICKEL PLATING
金具 FITTING NAIL	銅合金 (τ=0.25) ニッケル下地 銅メッキ COPPER ALLOY (τ=0.25) TIN OVER NICKEL PLATING.
グラウンド端子 GROUND TERMINAL	銅合金 (τ=0.15) ニッケル下地 銅メッキ COPPER ALLOY (τ=0.15) TIN OVER NICKEL PLATING.

② N=偶数に適用 (N:極数)
APPLY FOR N-EVEN(N:CIRCUIT)

③ パターン剥離止め用金具
FITTING NAIL FOR PREVENTION OF PEELING
OF P.C.B PATTERN.

④ 適合ジャケット: 503150-**-09
製品詳細寸法はSD-503150-001を参照下さい。
APPLICABLE JACKET: 503150-**-09
RE DETAILED DIMENSION, SEE SD-503150-001.

⑤ 適合ジャケットカバー: 503151-**-09
製品詳細寸法はSD-503151-001を参照下さい。
APPLICABLE JACKET COVER: 503151-**-09
RE DETAILED DIMENSION, SEE SD-503151-001.

適合FFC推奨寸法
APPLICABLE FFC
RECOMMENDED DIMENSION
(仕上がり厚さ: コネクタ接点部 0.3±0.03)
シールド部 0.44±0.05)

コネクタ接点部
シールド部

RELEASED	EC NO: 0	2008/07/07 DRWN:MABEI 2008/07/09 CHKD: MORIKAWA 2008/07/10 APPR:K.MORIKAWA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE —//—	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
				10 UNDER	± 0.2	DRAWN BY M.NABEI	DATE '08/07/07	TITLE 0.5 FFC TO BOARD CONN REC HSG ASSY (ST)			
				10 OVER 30 UNDER	± 0.25	CHECKED BY K.MORIKAWA	DATE '08/07/07				
				30 OVER	± 0.3	APPROVED BY H.HIRATA	DATE '08/07/07	 MOLEX INCORPORATED			
				ANGULAR	±1 °	MATERIAL NO.					
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE SHEET 1		SD-501786-010		2 OF 2			
REV			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

10

9

8

7

6

5

4

3

2

1

ELV AND RoHS COMPLIANT.


NOTES

- 梱包数量: 900 個/リール
NUMBER OF CONNECTORS: 900 PCS/REEL
- リードテープ長さ
LEAD TAPE LENGTH


トップテープ未接着部
TOP TAPE NON-BONDED PART

トップテープ接着部
TOP TAPE BONDED PART
(空エンボス)
(EMPTY)




引き出し方向
PULL OUT DIRECTION

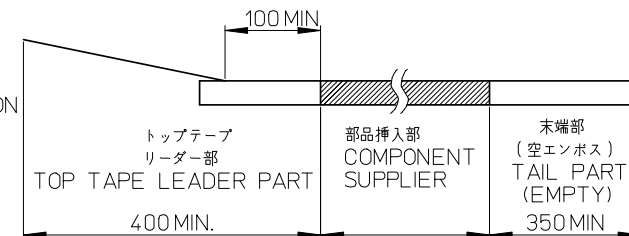

- トップテープの剥離強度: 「JES-59」参照のこと
(剥離方向は下図参照)
PEEL-OFF FORCE OF TOP TAPE: REFER TO JES-59
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)

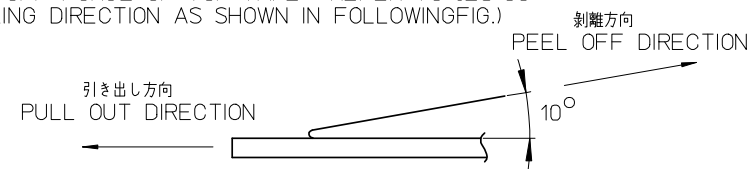

- 製品詳細寸法については図面 SD-501786-010を参照下さい。
RE DETAILED DIMENSION, SEE SD-501786-010.
- 材料(MATERIAL)
キャリアテープ(CARRIER TAPE): ポリスチレン(POLYSTYRENE)
トップテープ(TOP TAPE): PET, PE, PE
リール(REEL): ポリスチレン(POLYSTYRENE)<<>リサイクル材を含む<>>
<<>RECYCLE MATERIAL CONTAINED<>>

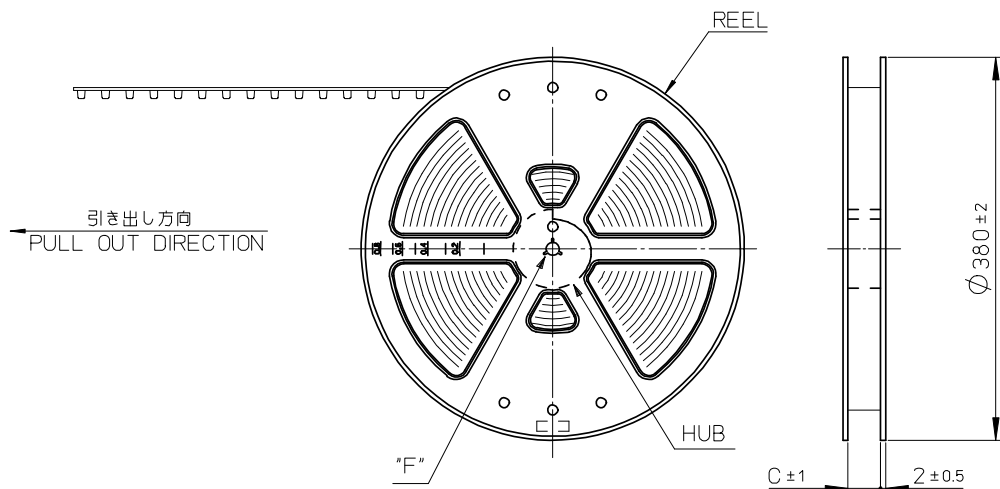


HUB

DETAIL "F"

501786-**81		MODEL NO.	
THIRD ANGLE PROJECTION		EMBSTP PKG FOR 0.5 FFC TO BOARD ST TYPE	
MOLEX INCORPORATED		SD-501786-011	
SHEET NO. 1 OF 2		EN-02DA(021)	
GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY	
10 UNDER ± 0.2		DRAWN BY M. NABEI	
10 OVER 30 UNDER ± 0.25		DATE '08/07/08	
30 OVER ± 0.3		CHECKED BY K. MORIKAWA	
ANGULAR ± 3 °		DATE '08/07/08	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY H. HIRATA	
SIZE A3		DATE '08/07/08	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		MATERIAL NO. SEE SHEET 2	

ELV AND RoHS COMPLIANT.

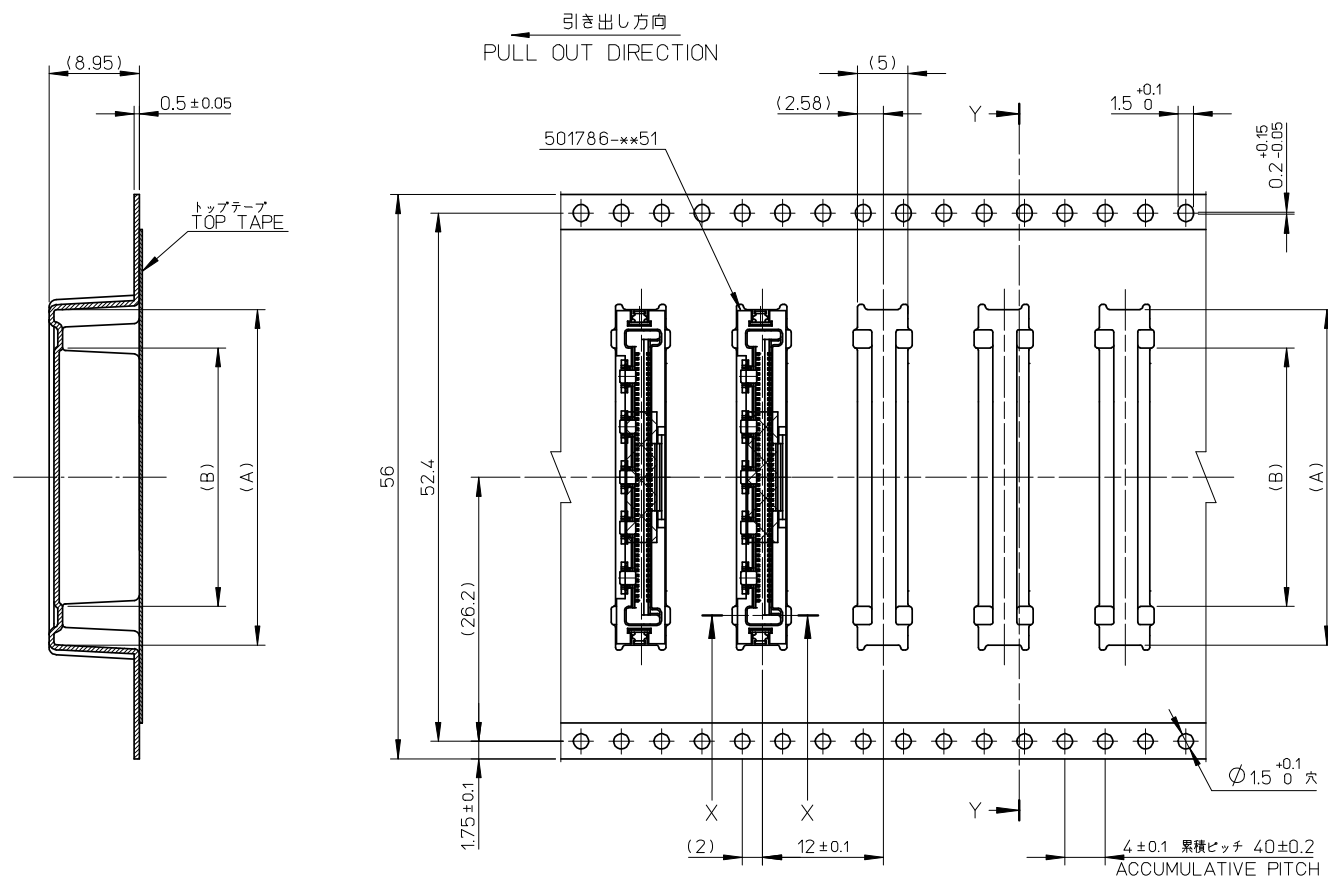

56mm幅キャリアテープ
56mm WIDTH CARRIER TAPE

56	57.4	25.68	33.3	501786-5081	50
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	A	製品番号 MATERIAL NO.	極数 CKT

RELEASED	EC NO: 0	DRAWN:MABEI CHKD:K.MORI KAWA APPR:K.MORI KAWA	2008/07/08 2008/07/09 2008/07/10	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE —//—	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
					10 UNDER ±0.2	M. NABEI '08/07/08	TITLE EMBSTP PKG FOR 0.5 FFC TO BOARD ST TYPE MOLEX INCORPORATED					
					10 OVER 30 UNDER ±0.25	CHECKED BY DATE K. MORI KAWA '08/07/08						
					30 OVER ±0.3	APPROVED BY DATE H. HIRATA '08/07/08						
					ANGULAR ±3 °	MATERIAL NO.				DOCUMENT NO.		SHEET NO.
REV					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		SEE TABLE SD-501786-011 2 OF 2			
										THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		