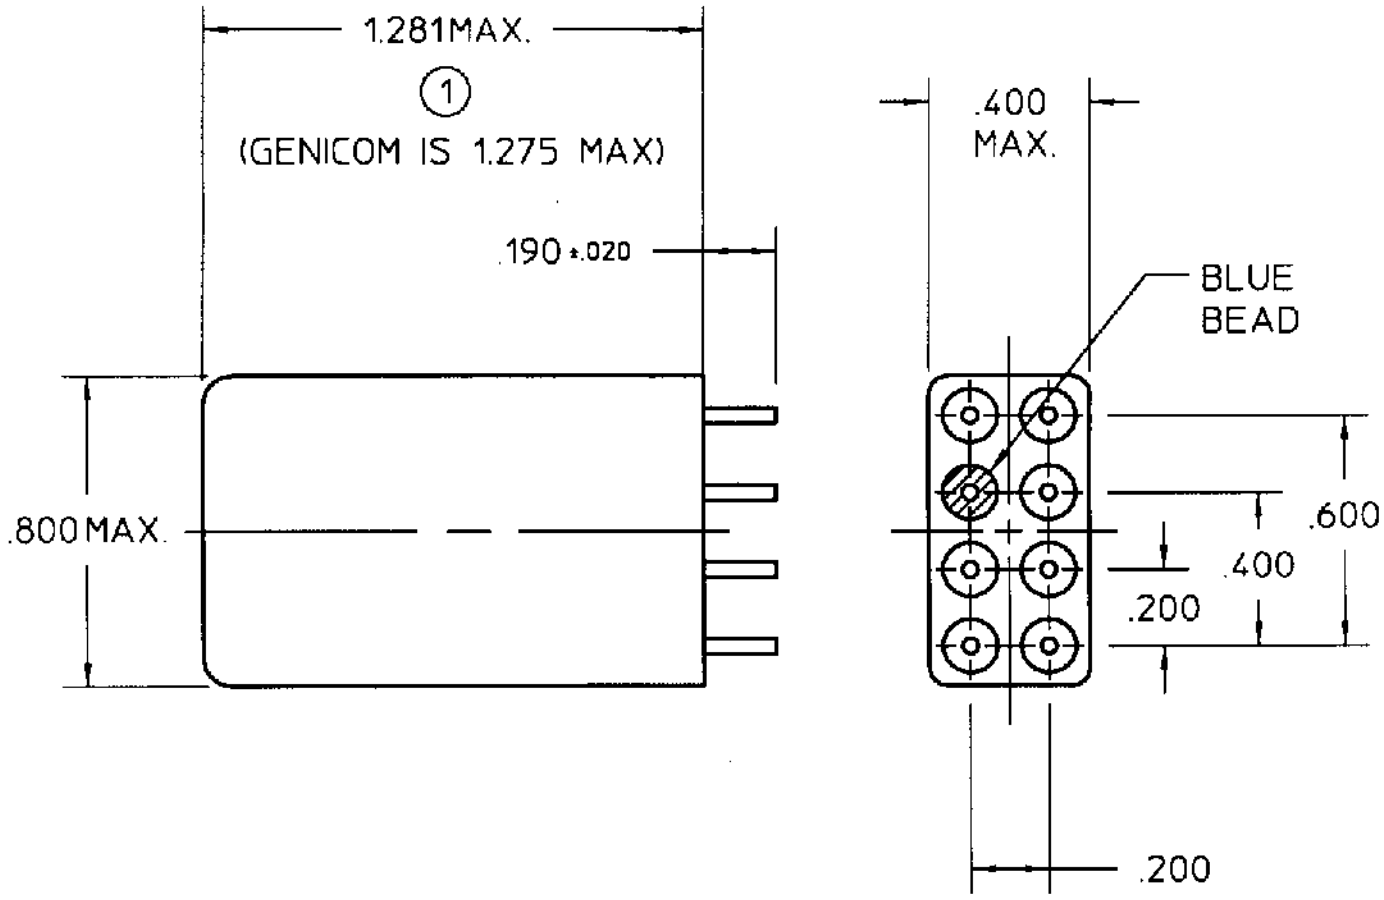


COIL: @ 25°C

| | |
|---|---|
| RESISTANCE | 2500 OHMS ± 10% |
| NOMINAL VOLTAGE | 20.0 VDC |
| MUST OPERATE | 4.0 mADC |
| MUST RELEASE | 2.0 mADC MAX. 0.40 mADC MIN. |

ENVIRONMENT:

(2) VIBRATION 10 Hz TO 2000 Hz @ 20 g's

SHOCK 90 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: (2) GENICOM IS 3000 Hz
OPERATE 15 MS MAX (3) (GENICOM IS 10 MS MAX)
RELEASE 10 MS MAX (4) (GENICOM IS 5 MS MAX)
BOUNCE 2 MS MAX

## CUSTOMER DATA SHEET




CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 5/1/97 CK. 5/1/97 RB

COMMUNICATIONS INSTRUMENTS, INC.

CUST. GENICOM
CUST. NO. 3SAT6004R1

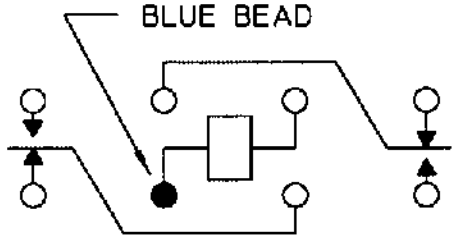TYPE "SF" RELAY

# SF5201J06