


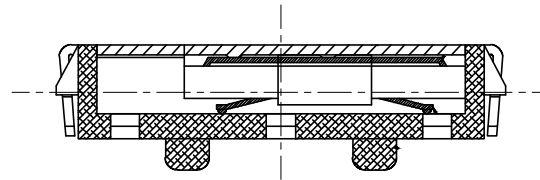
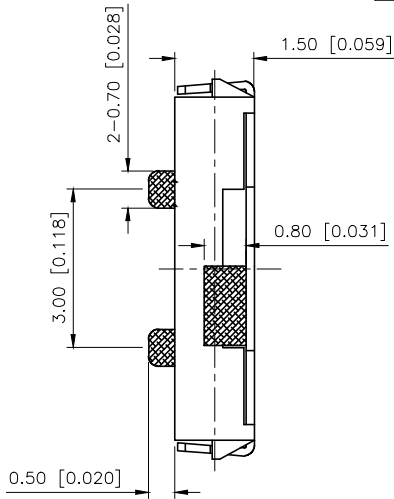


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.17	阿树

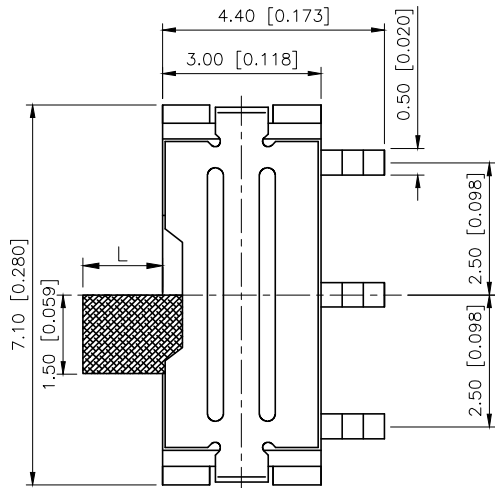


NOTE:
Rating: DC 12V 50mA
Operating Force:200±100gf
Lifetime:10,000 Cycles

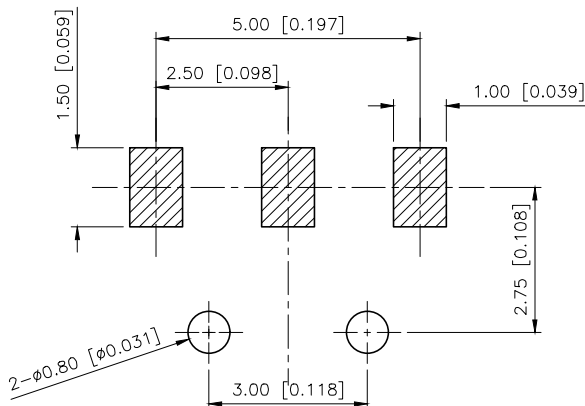

P.C.B. LAYOUT

PAPT NO	L
SK-3390A-L0	1.00
SK-3390A-L1	1.50
SK-3390A-L2	2.00



CIRCUIT DIAGRAM

5	Terminal	3	Brass(0.30t)	ag Plated
4	Contact spring	1	Phosphor branze	ag Plated
3	Base	1	LCP	Black
2	Cover	1	Sus	Natural
1	Keystake	1	PA46	Black
ITEM	PAPT NAME	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuces	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:
UNIT: mm/in
SIZE: A4

MODEL TYPE:	SLIDE SWITCH
PART NO.:	SK-3390A-X
DWG NO.:	