

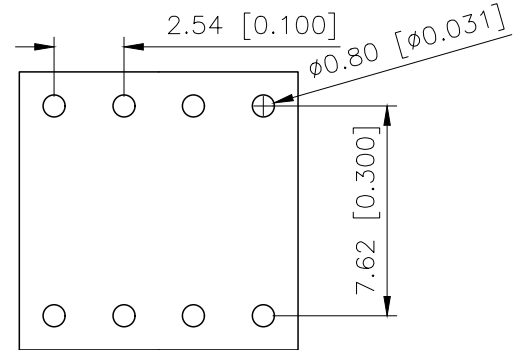
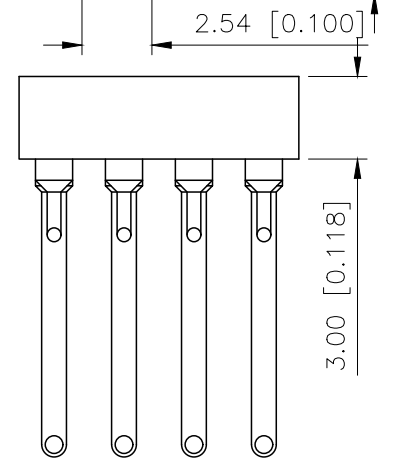


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.2.19	阿树

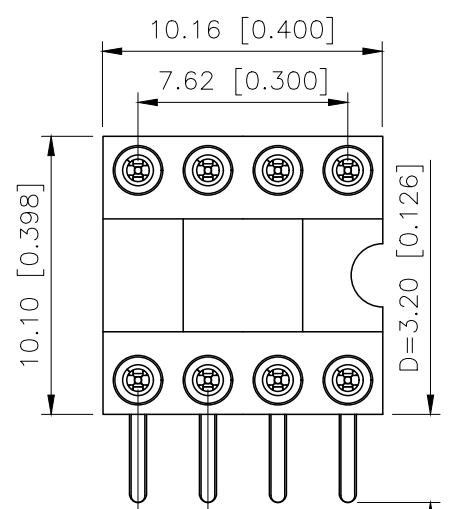

Recommended P.C.B
Layout(± 0.05)

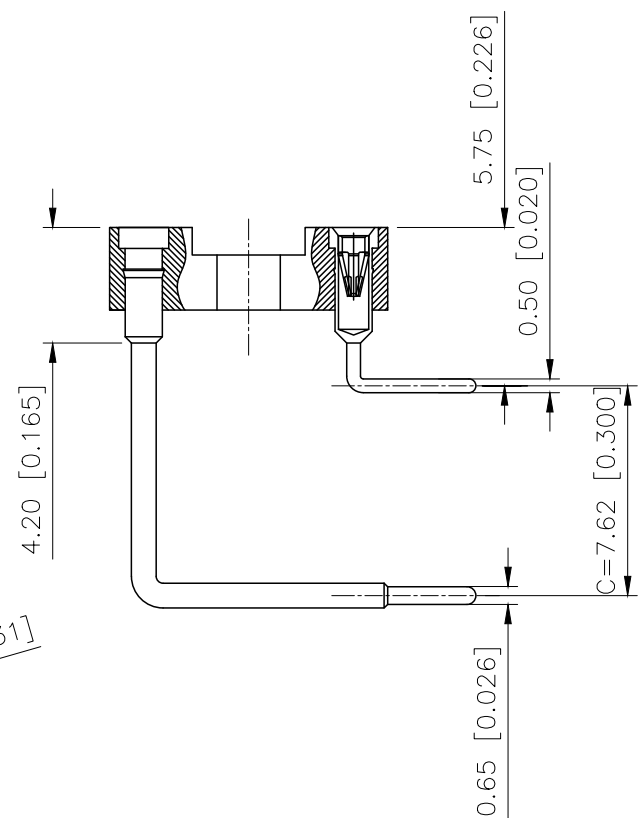

Technical Date
Pin(outer sleeve):Brass,machined CuZn38pb2
Cllp (Contact 4 Finger):Beryllium copper,heat teated
Insulator:PPS UL94V-0 colour:black
Gold Plated:2um"/80u"NI,GF
Current rating:3Amps
Mating Pin ϕ :0.38/0.56mm
Mechanical Life:min 500 cycles
Contact resistance: 10m Ω max
Dielectric strength:1000V
Operating temperature:-40°C~+105°C
Soldering temperature:+255°C

PART NO.:

X5621 F R-2xXX-C762 D32-2500
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Category:F-Female
- ③Welding Board Angle:R-Stright 90°
- ④Row No-Pin No:2xXX-2x01Pin-2xXXPin
- ⑤Line spacing:C=7.62mm
- ⑥Pin Length:D=3.2mm
- ⑦2500:Type2500

X5621FR-2xXX-C762D32-2500	PPS	Brass	X5621W
PART NO	Material	Material(Pin)	Suitable XKB Wafer
DESIGN	阿树	VIEW:	MODEL TYPE: 2.54mm BTB Style Connector
CHECKED		UNIT: mm/in	PART NO.: X5621FR-2xXX-C762D32-2500
APPROVED		SIZE: A4	DWG NO.:
SCALE			PAGE
N/A			1/1
REVISION			A1

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERAuces	



XKB INDUSTRIAL PRECISION CO.,LIMITED