

1619786

https://www.phoenixcontact.com/us/products/1619786

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Device connector rear mounting, series: CA, straight, shielded: yes, for standard and SPEEDCON interlock, No. of pos.: 16, Direction of rotation: Standard, contact connection type: Socket, Solder connection, Axial seal, Central fixing, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1243838

Your advantages

- · Safe use in the field, thanks to high degree of protection
- · Connector for flexible on-site assembly
- · Consistent EMC protection for reliable transmission of signals
- · Solder connection: proven connection technology for various litz wires
- · Application-specific wall mounting optionally with thread or anti-rotation protection and lock nut

Commercial data

Item number	1619786
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB31
Product key	ABRAER
GTIN	4046356821315
Weight per piece (including packing)	51.8 g
Weight per piece (excluding packing)	47 g
Customs tariff number	85366990
Country of origin	DE



1619786

https://www.phoenixcontact.com/us/products/1619786

Technical data

Product properties

Product type	Circular connectors (device side)
Froduct type	Circular connectors (device side)

Connector

Insulating body

Coding	N
Insulation body material	PBT
Contact material	CuZn
Contact surface material	Ni/Au
Insertion/withdrawal cycles	100
Connection method	Solder connection
Contact switching type	Socket
Application	Signal
Number of positions	16
Direction of rotation	Standard
Connection profile	16
Rated voltage	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Contact diameter Signal contacts	1 mm
Litz wire cross-section Signal contacts max.	1 mm²
Nominal current per signal contact	8 A

Housing

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Type of locking	for standard and SPEEDCON interlock
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23

Environmental and real-life conditions

Ambient conditions

A MINISTRA CONTRIBUTION		
Ambient temperature (operation)	-40 °C 125 °C	




1619786

https://www.phoenixcontact.com/us/products/1619786

Drawings

Schematic diagram

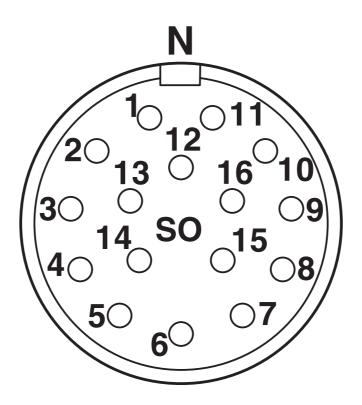

Connector pin assignment



1619786

https://www.phoenixcontact.com/us/products/1619786

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1619786

cUL Recognized Approval ID: E335019-20141210				
	Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
	48 V	5 A	18 - 18	-

UL Recognized Approval ID: E335019-20141210					
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		48 V	8 A	18 - 18	-

cULus Recognized



1619786

https://www.phoenixcontact.com/us/products/1619786

Classifications

ECLASS

	ECLASS-11.0	27440102		
	ECLASS-12.0	27440116		
	ECLASS-13.0	27440116		
ЕТ	ETIM			
L 1	IIVI			
	ETIM 9.0	EC002635		
UNSPSC				
	UNSPSC 21.0	39121400		



1619786

https://www.phoenixcontact.com/us/products/1619786

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	b1d097d9-c295-45c4-8ded-98544575cb88



1619786

https://www.phoenixcontact.com/us/products/1619786

Accessories

SF-Z0019 - Protective cap

1607449

https://www.phoenixcontact.com/us/products/1607449



Plastic protection cap, with eye, IP40 for connectors with M23 external thread, RF, SF series

RC-Z2469 - Protective cap

1611797

https://www.phoenixcontact.com/us/products/1611797



Plastic protection cap, antistatic, for RF, SF, CA, RC series connectors, with M23 external thread



1619786

https://www.phoenixcontact.com/us/products/1619786

RC-Z2104 - Metal protective cap

1604260

https://www.phoenixcontact.com/us/products/1604260



Metal protective cap, M23, degree of protection: IP67, series: RC, UC, RF, SF, NC, RM, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241739

RC-Z2068 - Metal protective cap

1604236

https://www.phoenixcontact.com/us/products/1604236



Metal protective cap, M23, degree of protection: IP67, series: RC, UC, RF, SF, NC, RM, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241735



1619786

https://www.phoenixcontact.com/us/products/1619786

CA-Z0110 - Color coding

1620700

https://www.phoenixcontact.com/us/products/1620700

Color coding, color: green



CA-Z0111 - Color coding

1620701

https://www.phoenixcontact.com/us/products/1620701

Color coding, color: orange





1619786

https://www.phoenixcontact.com/us/products/1619786

CA-Z0112 - Color coding

1620702

https://www.phoenixcontact.com/us/products/1620702

Color coding, color: black



CA-Z0001 - Contact removal tool

1620699

https://www.phoenixcontact.com/us/products/1620699



Unlocking tool for contact carriers for snapping in the M23 signal device connectors



1619786

https://www.phoenixcontact.com/us/products/1619786

PROT-M23PRO-OT-IP20 - Plastic protective cap

1055753

https://www.phoenixcontact.com/us/products/1055753



Plastic protective cap, M23, degree of protection: IP20, series: M23 PRO

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com