

VCSS8050B-1.5A



NPN SOT-23 300mW

Green Product

FEATURES

Complimentary to VCSS8550B-1.5A

Electrical Symbol:



SOT-23

MARKING: Y1

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	40	V
V_{CEO}	Collector-Emitter Voltage	25	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current -Continuous	1.5	A
P_C	Collector Power Dissipation	0.3	W
T_j	Junction Temperature	150	$^{\circ}\text{C}$
T_{stg}	Storage Temperature	-55-150	$^{\circ}\text{C}$







ELECTRICAL CHARACTERISTICS ($T_{amb}=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 100\mu\text{A}$, $I_E = 0$	40			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 0.1\text{mA}$, $I_B = 0$	25			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 100\mu\text{A}$, $I_C = 0$	5			V
Collector cut-off current	I_{CBO}	$V_{CB} = 40\text{V}$, $I_E = 0$			0.1	μA
Collector cut-off current	I_{CEO}	$V_{CB} = 20\text{V}$, $I_E = 0$			0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = 5\text{V}$, $I_C = 0$			0.1	μA
DC current gain	$h_{FE(1)}$	$V_{CE} = 1\text{V}$, $I_C = 100\text{mA}$	120		400	
	$h_{FE(2)}$	$V_{CE} = 1\text{V}$, $I_C = 800\text{mA}$	40			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 800\text{mA}$, $I_B = 80\text{mA}$			0.5	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = 800\text{mA}$, $I_B = 80\text{mA}$			1.2	V
Transition frequency	f_T	$V_{CE} = 10\text{V}$, $I_C = 50\text{mA}$ $f = 30\text{MHz}$	100			MHz

CLASSIFICATION OF $h_{FE(1)}$

Rank	C	D	D1	D2
Range	120-200	160-300	200-350	300-400


Typical Characteristics

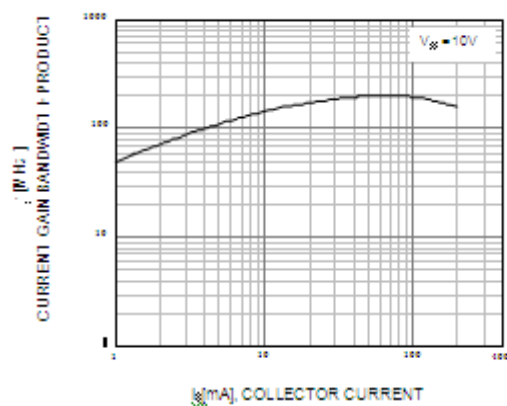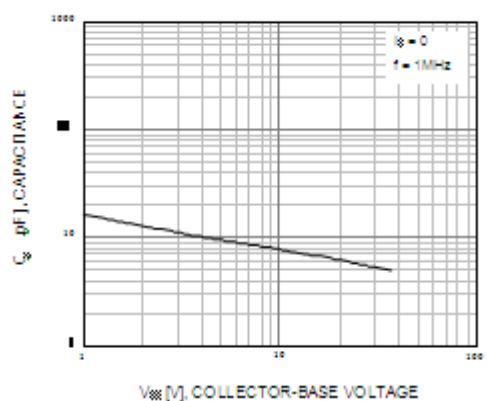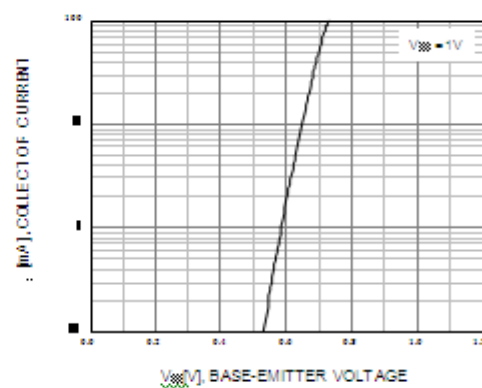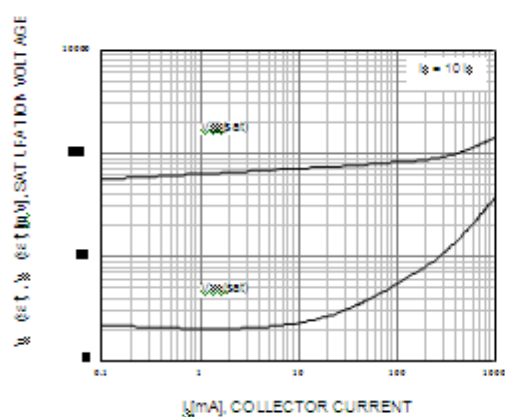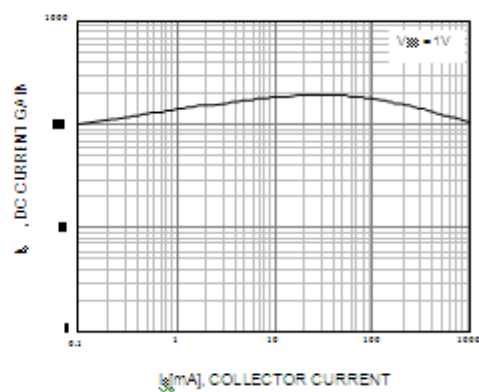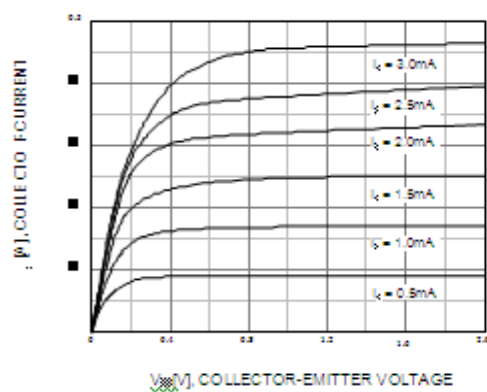

PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

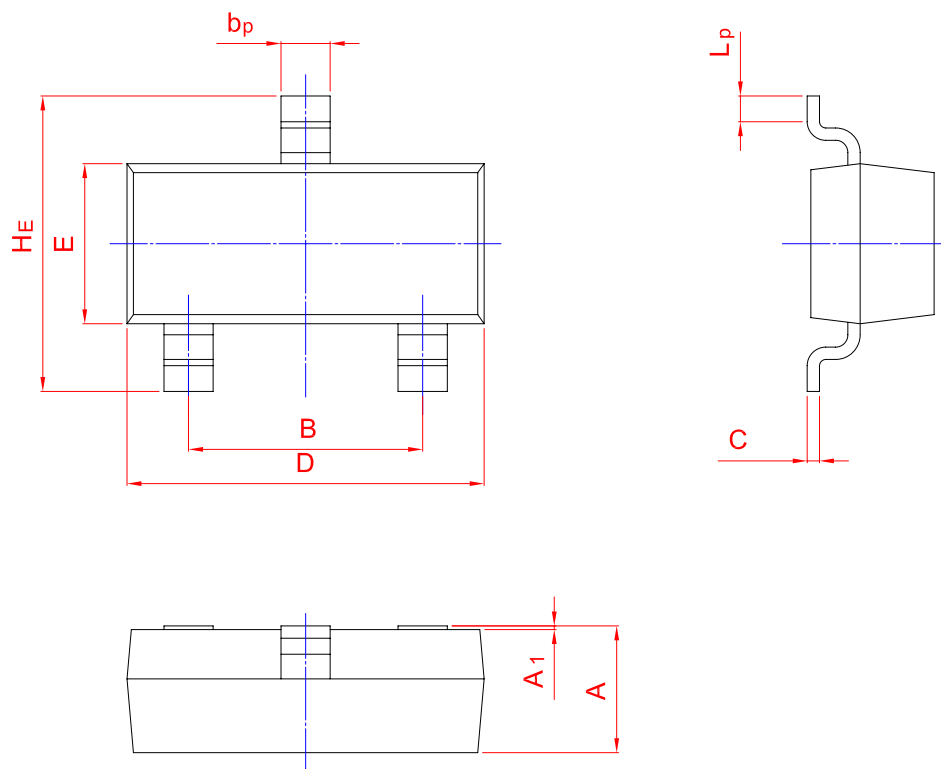

UNIT	A	B	bp	C	D	E	HE	A1	Lp
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013	0.50 0.20

Important Notice and Disclaimer

Weforsemi reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Weforsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Weforsemi assume any liability for application assistance or customer product design. Weforsemi does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Weforsemi .

Weforsemi products are not authorized for use as critical components in life support devices or systems without express written approval of Weforsemi .