




Terminals & Splices > PCB Terminals

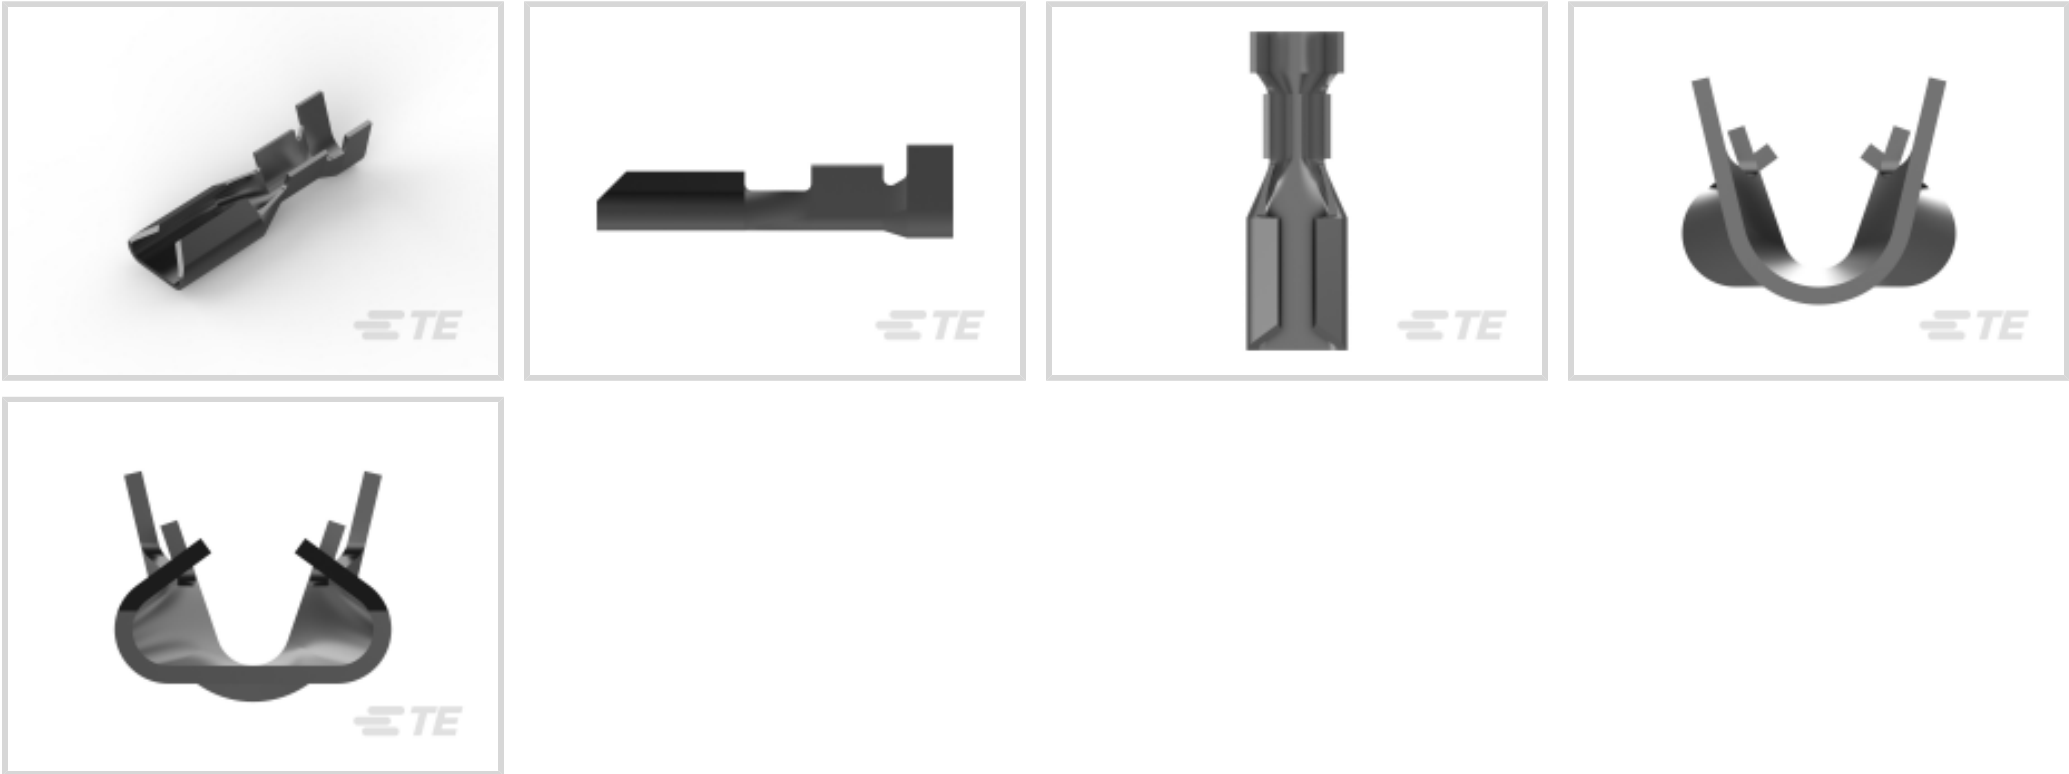

PCB Terminal Type: **Receptacle**  
PCB Thickness (Recommended): **1.57 mm [.062 in]**  
PCB Hole Diameter: **4.1 mm [.161 in]**  
Compatible Insulation Diameter (Max): **2.54 mm [.1 in]**  
Compatible Insulation Diameter Range: **2.03 – 2.54 mm [.08 – .1 in]**

Features

Product Type Features

|                                        |             |
|----------------------------------------|-------------|
| Terminal Features                      | Stud Hole   |
| Wire Insulation Support Retention Type | Open Barrel |

Contact Features

|                                                |                              |
|------------------------------------------------|------------------------------|
| Contact Mating Area Plating Material Thickness | 2.03 – 5.08 µm[80 – 200 µin] |
| PCB Terminal Type                              | Receptacle                   |
| Terminal Plating Material                      | Tin                          |
| Terminal Orientation                           | Straight                     |

Termination Features

|                           |                       |
|---------------------------|-----------------------|
| Termination Method to PCB | Through Hole - Solder |
| Product Terminates To     | Printed Circuit Board |

Mechanical Attachment

|                         |      |
|-------------------------|------|
| Wire Insulation Support | With |
|-------------------------|------|

Dimensions

|  |  |
|--|--|
|  |  |
|--|--|



|                                      |                             |
|--------------------------------------|-----------------------------|
| Terminal Material Thickness          | .25 mm[.01 in]              |
| PCB Thickness (Recommended)          | 1.57 mm[.062 in]            |
| PCB Hole Diameter                    | 4.1 mm[.161 in]             |
| Compatible Insulation Diameter (Max) | 2.54 mm[.1 in]              |
| Compatible Insulation Diameter Range | 2.03 – 2.54 mm[.08 – .1 in] |
| Wire Size                            | .3 – .9 mm <sup>2</sup>     |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Insulation Option           | Uninsulated                |
| Operating Temperature Range | -30 – 105 °C[-22 – 221 °F] |

Packaging Features

|                    |       |
|--------------------|-------|
| Packaging Quantity | 20000 |
| Packaging Method   | Reel  |

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                             |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                    |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

TE Part # 61455-2  
AMP EDGE TERM IS 30-22 TPPHBZ

TE Part # 60704-1  
AMP EDGE TERM IS 20-18 016TPBR

TE Part # 60156-2  
AMP EDGE TERM IS 20-18 016TPBR

TE Part # 61782-2  
AMPEDGE FLAG 22-16 .0126TPBR

Customers Also Bought

TE Part #1-487545-7  
FFC Receptacle Housing: 1.27mm

Documents

Product Drawings

AMP-EDGE TERM 22-18 SN/PHBZ

English

CAD Files

3D PDF

English

Customer View Model

ENG\_CVM\_61561-2\_E.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_61561-2\_E.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_61561-2\_E.2d\_dxf.zip

English

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_61561-2\_L.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_61561-2\_L.3d\_igs.zip



English

Customer View Model

[ENG\\_CVM\\_CVM\\_61561-2\\_L.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[PRINTED CIRCUIT BOARD TERMINALS AND DISCONNECTS](#)

English

Product Specifications

[Product Specification](#)

English

[Terminal, AMP EDGE](#)

English