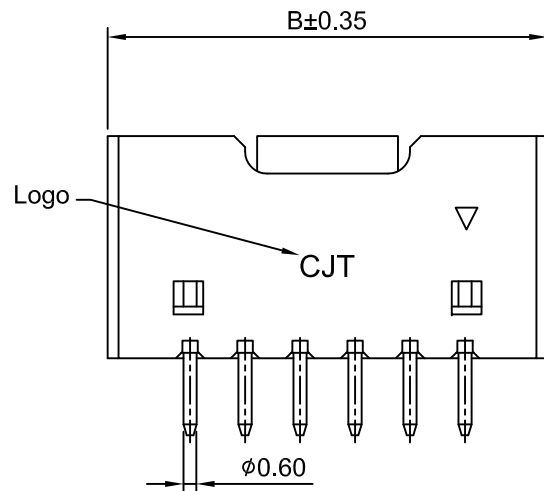
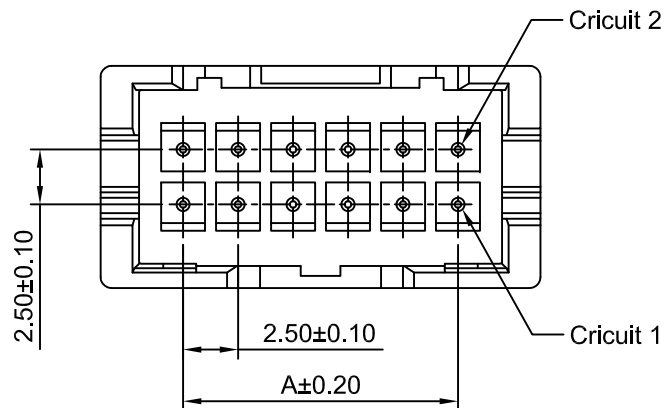


P.C.B LAYOUT (TOP VIEW)
TOLERANCE:±0.05

Ordering Information:

A2508WV-2xXP - * - *** - **
1 2 3 4

1.Part NO.

2.Pin Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

3.Size(D):


(Blank): 3.50±0.20

D30: 3.00±0.20

4.Logo:

(Blank): With CJT Logo

NK: Without CJT Logo



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Material: Glass-filled Nylon 66,UL94V-0(Natural)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2508WV-2x4P	7.50	15.00
A2508WV-2x5P	10.00	17.50
A2508WV-2x6P	12.50	20.00
A2508WV-2x7P	15.00	22.50
A2508WV-2x8P	17.50	25.00
A2508WV-2x9P	20.00	27.50
A2508WV-2x10P	22.50	30.00
A2508WV-2x11P	25.00	32.50
A2508WV-2x12P	27.50	35.00
A2508WV-2x13P	30.00	37.50
A2508WV-2x14P	32.50	40.00
A2508WV-2x15P	35.00	42.50
A2508WV-2x16P	37.50	45.00
A2508WV-2x17P	40.00	47.50
A2508WV-2x18P	42.50	50.00
A2508WV-2x19P	45.00	52.50
A2508WV-2x20P	47.50	55.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A4	CHANGE THE INFORMATION	2022.11.03
A3	MODIFY DRAWING	2022.09.06
A2	CHANGE THE INFORMATION	2021.05.13
A1	CHANGE THE DRAWING	2020.05.13
A0	NEW RELEASE	2018.09.30
REV	DESCRIPTION	DATE

Unit	Scale	Sheet
mm	3:1	1 of 1
DRAWN	CHK'D	APPR
Dengchun Yi	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x.x±0.25		
x.xx±0.20		
x.xxx±0.15		
ANGLES ±1°		

TITLE		
2.50mm PITCH VERTICAL DUAL ROW DIP WAFER		
DRAWING NO.		REV
A2508WV-2xXP		A4