


RoHS  
Ready





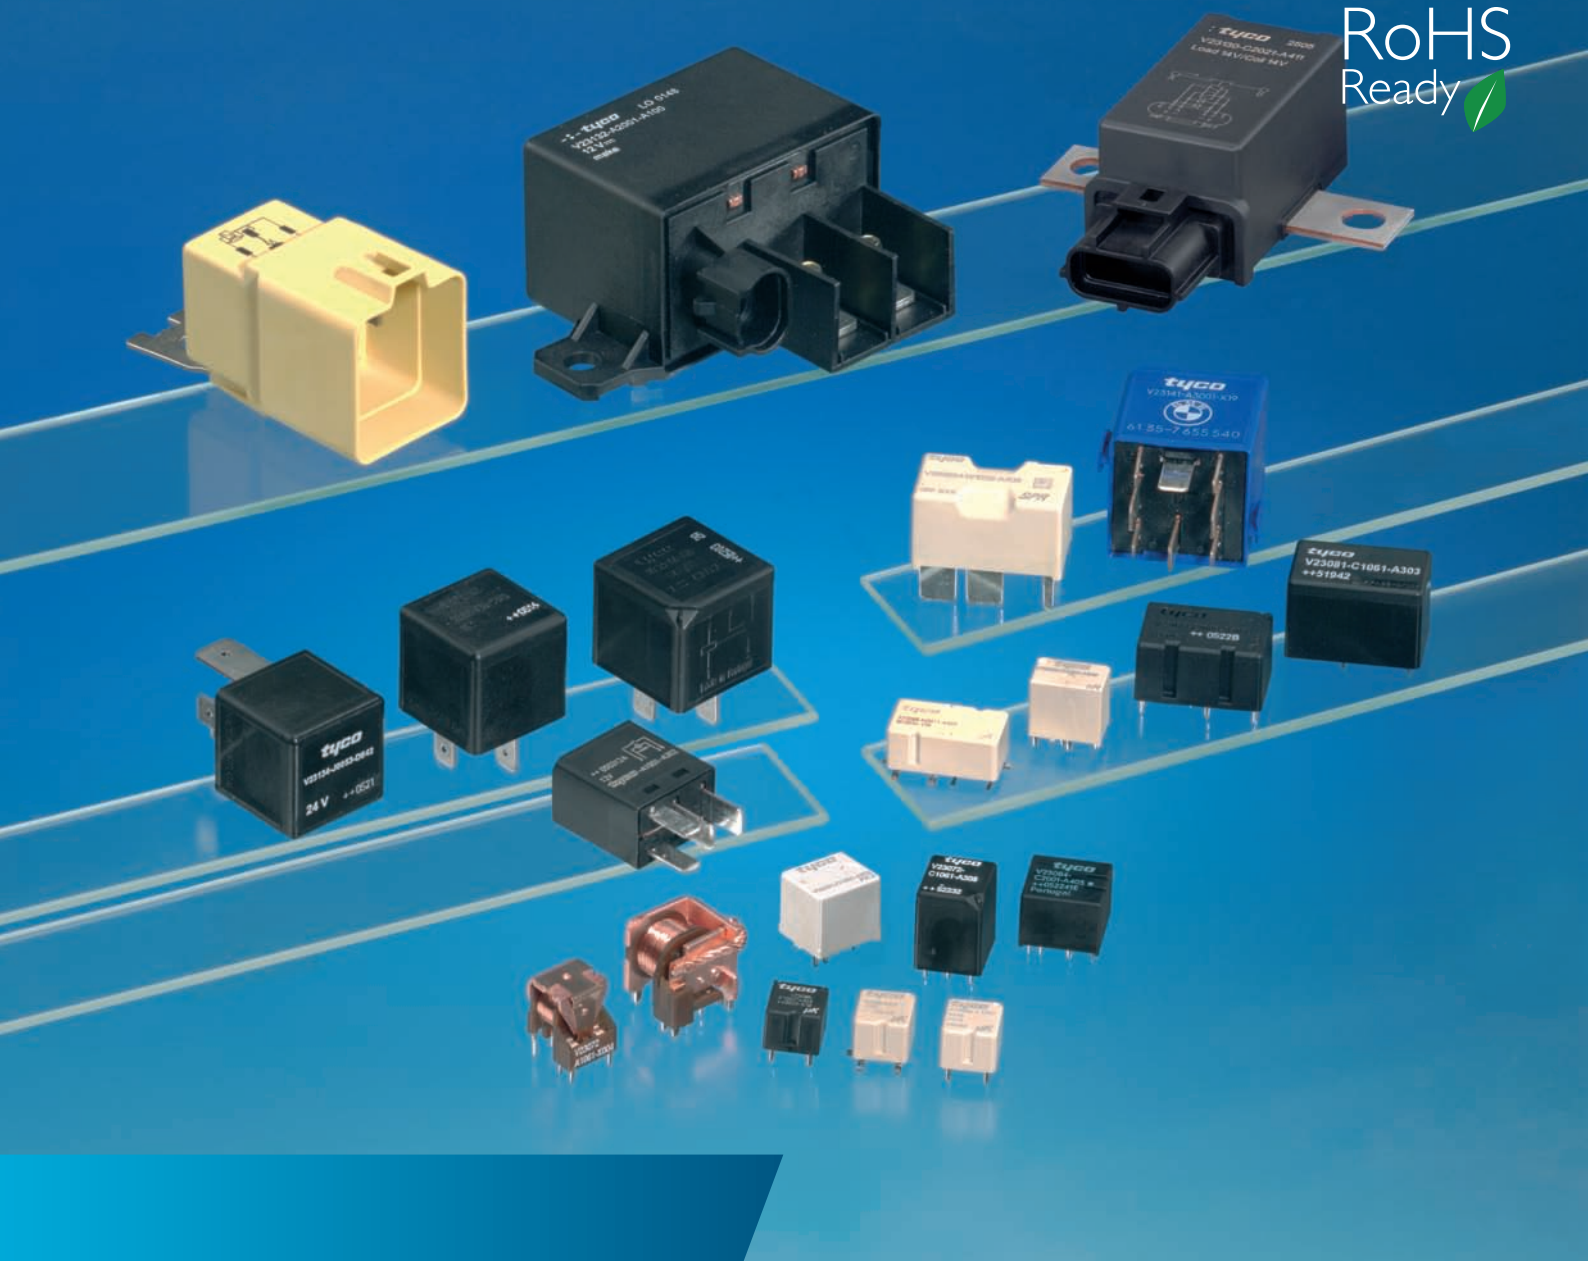

## Automotive Relays and Switching Modules – Shortform





**OBSOLETE**  
**NOT the LATEST**  
**REVISION**

 Tyco Electronics

## Plug-In Relays






Relay Type	Power F4 (V23134)	Power F7 (V23134-J)	Micro A (V23074)	Power FA 4/7 (shrouded) (V23136)	
					
Special Feature	Terminal dimensions and allocations similar to ISO 7588-1		Terminal dimensions and allocations similar to ISO 7588-3		Terminal dimensions and allocations similar to ISO 7588-1
ELV/RoHS/WEEE status	Compliant		Compliant		Compliant
<b>Contacts <sup>1)</sup></b>					
Configuration	1 Form U/C/A/A with 2 pins 87		1 Form A, 1 Form C		1 Form A/C   1 Form A
Max. switching current – ON	45 A N/C, 120 A N/O		20 A N/C, 120 A N/O		45 A N/C, 120 A N/O   240 A
Max. switching current – OFF	40 A N/C, 60 A N/O		15 A N/C, 30 A N/O		40 A N/C, 60 A N/O   70 A
Continuous current at 23°C	40 A N/C, 60 A N/O		20 A N/C, 30 A N/O		40 A N/C, 60 A N/O   70 A
Continuous current at 85°C	30 A N/C, 40 A N/O		15 A N/C, 25 A N/O		30 A N/C, 40 A N/O   50 A
Contact material options	Silver based		Silver based		Silver based
<b>Coil</b>					
Coil voltage range (V)	12, 24		12, 24		12
Nominal coil power (W)	1.6		1.4, 1.6		1.5   1.9
<b>General Data</b>					
Operate time (ms) – typ. <sup>4)</sup>	7		5		8.5
Release time (ms) – typ. <sup>4)</sup>	2		2		4
Temperature range (°C)	- 40 to +125		- 40 to +125		- 40 to +85
Sealing <sup>5)</sup>	Dustproof		Dustproof		Sealed <sup>3)</sup>
Termination method	Quick connect, PCB		Quick connect		Quick connect
Dimensions (mm) – L x W x H	26.2 x 26.2 x 25.2		23 x 15.5 x 25.4		34.0 x 46.0 x 55.0






## High Current Devices

Relay Type	HCR 150 (V23132)	HCR 75 (V23232)	BDS-A (V23130-C)	SPR (V23135)
				
Special Feature			Electrically settable and resettable bistable device	Full, symmetric disconnection of the star-point of an EPS motor
ELV/RoHS/WEEE status	Compliant	Compliant	Compliant	Compliant
<b>Contacts <sup>1)</sup></b>				
Configuration	1 Form A/C/X	1 Form A	1 Form X	1 Triple contact
Max. switching current – ON	300 A	100 A	190 A - 50 k/100 A - 100 k	200 A / > 10 cycles
Max. switching current – OFF	300 A	100 A	190 A - 50 k/100 A - 100 k	
Max. switching current – ON/OFF/ON at 23°C			1000 A - 5 times	120 A <sup>2)</sup>
Max. limiting current at 23°C	180 A with cable 25 mm <sup>2</sup>		1500 A for 200 ms, 1000 A for 1 s	
Continuous current at 23°C			Approx. 280 A	90 A <sup>2)</sup> (60 A at 125°C) <sup>2)</sup>
Continuous current at 85°C	130 A with cable 25 mm <sup>2</sup>		190 A	
Contact material options	Silver based	Silver based	Silver based	Silver based
<b>Coil</b>				
Coil voltage range / V	12, 24	12, 24	12, 24, 42	10, 12, 24
Nominal coil power (W)	4.1	3.1, 4.4	Excitation with pulses (15...100 ms)	1.48
<b>General Data</b>				
Operate time (ms) – typ. <sup>4)</sup>	< 30	< 15	< 15	< 20
Release time (ms) – typ. <sup>4)</sup>	< 15	< 15	< 15	< 10
Temperature range (°C)	- 40 to +125		- 40 to +120	- 40 to +135
Sealing <sup>5)</sup>	Dustproof	Dustproof	Sealed	Sealed
Termination method	M6 stud bolts + superseal	M5 screws + coil terminals	M8 screws + connector	Leadframe assembly
Djmenstions (mm) – L x W x H	63.0 x 40.0 x 71.0	44.0 x 36.0 x 39.0	35.0 x 35.0 x 60.0 <sup>6)</sup>	32.3 x 18.3 x 18.8 <sup>6)</sup>

- 1) Contact data: current values are for the 12 V versions.
- 2) Max. terminal temperatures up to 180°C are possible. Final temperatures depend on the leadframe layout.
- 3) Using special sockets the relay is sealed according to protection class IP67.
- 4) Operate and release time measured at nominal voltage without coil suppression circuit.
- 5) According to IEC 529: IP54 (Dustproof); IP67 (Sealed).
- 6) Dimensions without connector.

## Single and Twin PCB Relays

Relay Type	Power K (V23133/076)	Mini K (V23072-A/C)	DMR THT (V23084-C)	PK2 THT/THR (V23201-C/R)	PK2 Latching (V23201-L)
					
Special Feature	High current version Power K-S (V23071) available			THT and THR versions available	
ELV/RoHS/WEEE status	Compliant	Compliant	Compliant	Compliant	Compliant
<b>Contacts <sup>1)</sup></b>					
Configuration	1 Form A, 1 Form C	1 Form A/C/U/X	2 Form C	1 Form A	1 Form A
Max. switching current – ON	30 A N/C, 100 A N/O	12 A N/C, 60 A N/O	35 A	200 A	200 A
Max. switching current – OFF	30 A N/C, 60 A N/O	10 A N/C, 20 A N/O	35 A	40 A	40 A
Continuous current at 23°C	30 A N/C, 45 A N/O <sup>2)</sup>	10 A N/C, 15 A N/O <sup>2)</sup>	30 A <sup>3)</sup> motor reverse	40 A	50 A
Continuous current at 85°C	25 A N/C, 30 A N/O <sup>2)</sup>	5 A N/C, 10 A N/O <sup>2)</sup>	30 A <sup>3)</sup> motor reverse	33 A	40 A
Contact material options	Silver based	Silver based	Silver based	Silver based	Silver based
<b>Coil</b>					
Coil voltage range (V)	12, 24	12, 24	12	12	12
Nominal coil power (W)	1.6	1.1	0.56, 0.81	0.82	Pulsed driving
<b>General Data</b>					
Operate time (ms) – typ. <sup>4)</sup>	5	3	3	3	1.5
Release time (ms) – typ. <sup>4)</sup>	3	1.5	1.3	1.5	1.5
Temperature range (°C)	-40 to +85	-40 to +85	-40 to +85	-40 to +105	-40 to +125
Sealing <sup>5)</sup>	Open or sealed	Open or sealed	Sealed	Sealed/Open vent hole	Sealed
Termination method	PCB	PCB	PCB	PCB	PCB
Dimensions (mm) – L x W x H	Open - 24 x 19.25 x 18.5 Sealed - 26.5 x 21.5 x 21.5	Open - 16 x 13.2 x 18 Sealed - 17.5 x 15 x 19.5	17.6 x 17 x 13.4	18.5 x 16.2 x 16.1	18.5 x 16.2 x 16.1

Relay Type	Micro K (V23086-C1/C2)	Micro K SMD (V23086-M1/M2)	Micro K THR (V23086-R1/R2)	Micro K Latching (V23086-L)	Nano Relay (V23138-C/R1 and C/R2)
					
Special Feature			Through-Hole-Reflow (THR) versions of Micro K		THT and THR versions available
ELV/RoHS/WEEE status	Compliant	Compliant	Compliant	Compliant	Compliant
<b>Contacts <sup>1)</sup></b>					
Configuration	1 Form A/C   2 Form C	1 Form C   2 Form C	1 Form C   2 Form C	1 Form C	1 Form C   2 Form C
Max. switching current – ON	40 A (100 A Form A)	40 A	40 A	50 A on set contact 20 A on reset contact	30 A
Max. switching current – OFF	30 A	30 A	30 A   30 A	30 A on set contact 20 A on reset contact	30 A
Continuous current at 23°C	25 A N/C, 30 A N/O	25 A N/C, 30 A N/O	25 A N/C, 30 A N/O	35 A on set contact 20 A on reset contact	15 A N/C, 20 A N/O
Continuous current at 85°C	15 A N/C, 20 A N/O	15 A N/C, 20 A N/O	15 A N/C, 20 A N/O	30 A on set contact 15 A on reset contact	
Contact material options	Silver based	Silver based	Silver based	Silver based	Silver based
<b>Coil</b>					
Coil voltage range (V)	10, 12	10, 12   12	12	12	12
Nominal coil power (W)	0.55   0.57	0.64	0.55	Pulsed driving	0.72
<b>General Data</b>					
Operate time (ms) – typ. <sup>4)</sup>	3	3	3	1.5	3
Release time (ms) – typ. <sup>4)</sup>	1.5	1.5	1.5	1.5	1.5
Temperature range (°C)	-40 to +105	-40 to +105	-40 to +105	-40 to +125	-40 to +125
Sealing <sup>5)</sup>	Sealed	Sealed	Open vent hole	Sealed	Sealed/Open vent hole
Termination method	PCB	PCB - SMD	PCB	PCB	PCB
Dimensions (mm) – L x W x H	Single - 13.2 x 12.2 x 10.1 Twin - 23.8 x 13.2 x 10.1	Single - 13.2 x 12.2 x 11.5 Twin - 23.8 x 13.2 x 11.5	Single - 13.2 x 12.2 x 10.4 Twin - 23.8 x 13.2 x 10.4	13.2 x 12.2 x 10.1	Single - 7.9 x 14.0 x 10.2 Twin - 15.6 x 10.2 x 14.2

1) Contact data: current values are for the 12 V versions.

2) Valid for contacts with AgNi0.15 contact material.

3) At 50% on period: max. make time 15 s.

4) Operate and release time measured at nominal voltage without coil suppression circuit.

5) Categories of protection: Sealed: tight washable; Open/Open vent hole: flux proof.



Tyco Electronics Ltd. is a leading global provider of engineered electronic components, network solutions and wireless systems, to customers in more than 150 countries. We design, manufacture and market products for customers in industries from automotive, appliances and aerospace and defense to telecommunications, computers and consumer electronics. With over 8,000 engineers and worldwide manufacturing, sales and customer service capabilities, Tyco Electronics' commitment is our customers' advantage. More information on Tyco Electronics can be found at [www.tycoelectronics.com](http://www.tycoelectronics.com).

## GLOBAL AUTOMOTIVE DIVISION

Tyco Electronics offers a broad range of high quality electronic component products. We provide solutions for OEM applications, utility and energy, outside plant and premise networking installations and more. Products from well-known brands include connectors and interconnection systems, terminal blocks, relays, electronic modules, circuit protection devices, fiber optic components, wires and cables, switches, wireless components, sensors, touch screens and application tooling. We also provide products to insulate, protect, hold, bundle and identify electrical harnesses.

Automotive technology and integrated systems continue to develop rapidly with electric and electronic systems in today's vehicles playing an increasingly important role for traffic safety and travelling comfort.

Producing more than 350 million components for the automotive industry a year Automotive Relays and Switching Modules is the market leader and supplies all major vehicle manufacturers worldwide. Our products cover virtually any application, ranging from lamps and electric sunroofs to battery disconnection over to energy management. Detailed product information is available at: <http://relays.tycoelectronics.com/auto.asp>.



## Welcome to Global Automotive Division

We invite you to take the Internet tour

[www.tycoelectronics.com](http://www.tycoelectronics.com)

[www.tycoelectronics.com/automotive](http://www.tycoelectronics.com/automotive)



**Tyco Electronics AMP GmbH**  
Paulsternstr. 26  
13629 Berlin / Germany  
Product Information Center  
Phone: +49-(0)30-38638-775  
Fax: +49-(0)30-38638-530

[www.tycoelectronics.com](http://www.tycoelectronics.com)  
TE Logo and Tyco Electronics  
are trademarks

Tyco Electronics AMP GmbH certified  
acc. ISO 14001 and ISO/TS 16949:2002

© 2007 Tyco Electronics Ltd.  
1308032-1 Issued 8-2007 6M ST

## Detailed Product Information is available at the following Tyco Electronics Companies:

### Europe/Middle East/Africa

**Germany** – Bensheim  
Phone: +49-6251-133-0  
Fax: +49-6251-133-1600

**Product Information Center:**  
Phone: +49-6251-133-1999  
Fax: +49-6251-133-1988

**Austria** – Vienna  
Product Information Center:  
Phone: +43-1-905-60-1249  
Fax: +43-1-905-60-1251

**Belgium** – Kessel-Lo  
Phone: +32-16-352-300  
Fax: +32-16-352-352

**Czech Republic and Slovakia**  
**Czech Republic** – Kurim  
Product Information Center:  
Phone: +420-541-162-113  
Fax: +420-541-162-132

**Denmark** – Glostrup  
Phone: +45-43-48-04-00  
Fax: +45-43-44-14-14

**Finland** – Helsinki  
Phone: +358-95-12-34-20  
Fax: +358-95-12-34-250

**France** – Cergy-Pontoise  
Product Information Center:  
Phone: +33-1-3420-8686  
Fax: +33-1-3420-8623

**France Export Divisions**  
Cergy-Pontoise Cedex  
Phone: +33-1-3420-8866  
Fax: +33-1-3420-8300

**Hungary** – Budapest  
Product Information Center:  
Phone: +36-1-289-1016  
Fax: +36-1-289-1017

**Italy** – Collegno  
Product Information Center:  
Phone: +39-011-4012-428  
Fax: +39-011-40-287-428

**Netherlands** – 's-Hertogenbosch  
Product Information Center:  
Phone: +31-73-6246-999  
Fax: +31-73-6246-998

**Norway** – Nesbru  
Phone: +47-66-77-88-50  
Fax: +47-66-77-88-55

**Poland** – Warsaw  
Product Information Center:  
Phone: +48-22-4576-704  
Fax: +48-22-4576-720

**Russia & C.I.S Countries** – Moscow  
Product Information Center:  
Phone: +7-495-790-79-02  
ext. 503

**South Africa** – Port Elizabeth  
Phone: +27-41-503-4500  
Fax: +27-41-581-0440

**Spain** – Barcelona  
Phone: +34-93-291-0330  
Fax: +34-93-201-7879

**Sweden** – Upplands Väsby  
Phone: +46-8-50-72-50-00  
Fax: +46-8-50-72-50-01

**Switzerland** – Steinach  
Phone: +41-71-447-0447  
Fax: +41-71-447-0444

**Turkey** – Istanbul  
Phone: +90-212-281-8181-83  
Fax: +90-212-281-8184

**United Kingdom** – Stanmore  
Product Information Center:  
Free (UK only): 0800-267-666  
Phone: +44-8706-080208  
Fax: +44-208-420-8095

### Americas

**Brazil** – São Paulo  
Phone: +55-11-2103-6105  
Fax: +55-11-2103-6204

**Canada** – Toronto  
Product Information Center:  
Phone: +905-470-4425  
Fax: +905-474-5525

**Mexico** – Mexico City  
Phone: +52-55-1106-0800  
+01-800-733-8926  
Fax: +52-55-1106-0901

**USA** – Harrisburg, PA  
Product Information Center:  
Phone: +1-800-522-6752  
Fax: +1-717-986-7575

Troy, MI  
Phone: +1-248-273-3359  
Fax: +1-248-273-3322

### Asia/Pacific

**Australia** – Sydney  
Product Information Center:  
Phone: +61-2-9840-8200  
Fax: +61-2-9634-6188

**India** – Bangalore  
Phone: +91-80-285-40800  
Fax: +91-80-285-40820

**Japan** – Kawasaki, Kanagawa  
Product Information Center:  
Phone: +81-44-844-8013  
Fax: +81-44-812-3200

**Korea** – Seoul  
Phone: +82-2-3415-4500  
Fax: +82-2-3486-3810

**Malaysia** – Selangor  
Phone: +60-3-7805-3055  
Fax: +60-3-7805-3066

**People's Republic of China** – Shanghai  
Phone: +86-21-2407-1588  
Fax: +86-21-2407-1599