

规格说明:Specifications:

电气特性:Electrical:

- 1.额定电流:Current Rating
1.5A/contact terminal
- 2.额定电压:Voltage Rating
30V DC
- 3.接触电阻>Contact Resistance
30 milliohms MAX
- 4.耐电压:Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 5.绝缘电阻:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 1.插拔力:Connector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
- 2.端子保持力:Terminal Retention
1.2kgf(MIN)


原材料:Material:

- 1.塑胶:Housing:
Hing Temperature Tnermaplastics,
UI 94V-0 PBT White
- 2.端子>Contact:Copper Alloy C2680
- 3.外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

- 1.端子>Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- 2.外壳:Shell:
Nickel Plating


MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:USB AF 2.0 侧插连接器弯脚加塞 13.8高	
			PAR	USB-226-BRY
DECIMALS:	ANGLES:		DWN	Lucas
.X:±0.30	X.:±5°		CHKD	Ethan
.XX:±0.20	X.X:±2°		APVD	Jacob
.XXX:±0.10		CUSTOMER COPY	SIZE:A4	SHEET:1F1
				REV:A

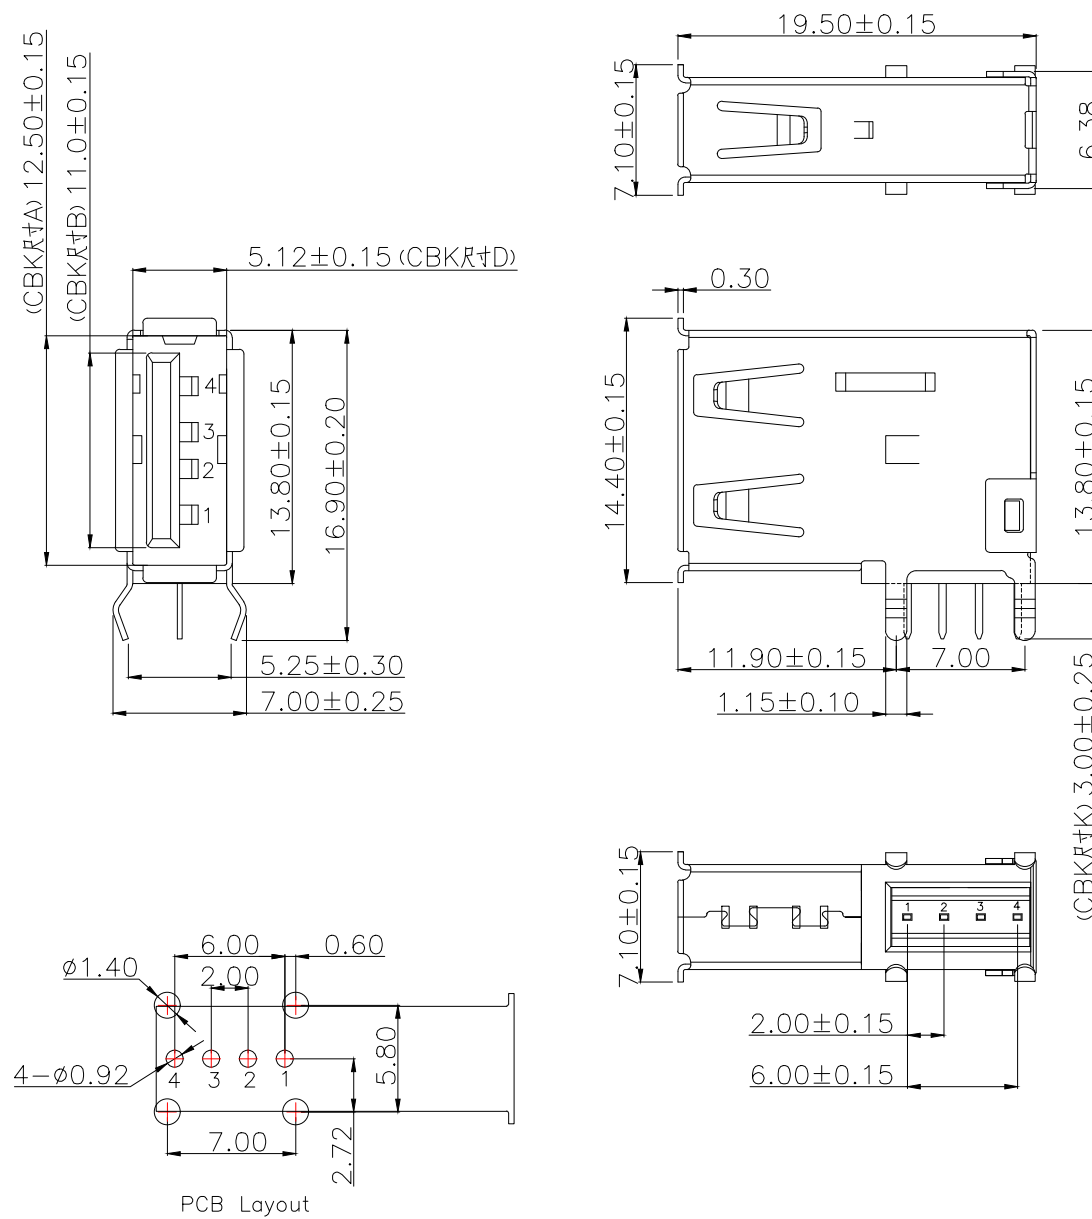




步骤1:将好的产品放入指定的托盘内,每盘放100PCS
放满后盖上吸塑盒上盖.

步骤3:将固定好的一栈(垛)产品放入纸箱,
(见下图).

步骤4:外箱规格及外箱标签贴附要求
(客户指定要求之标签及规格参照"客户包装规范")

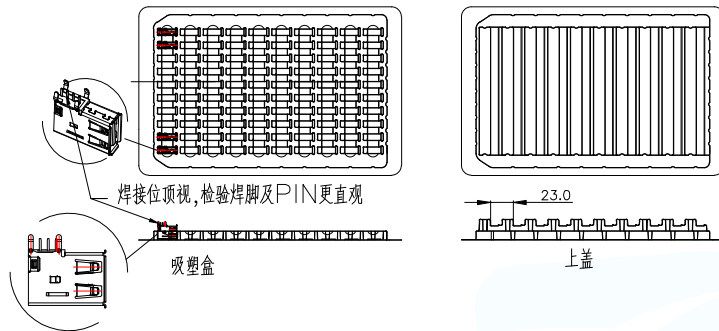

步骤2:将10盘产品叠为一(垛)栈,
使用拉伸膜双十字型固定好.

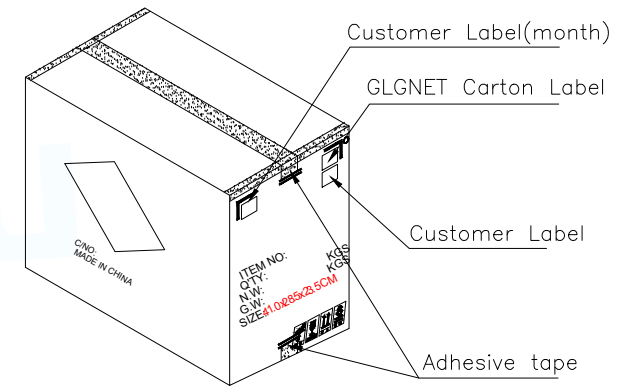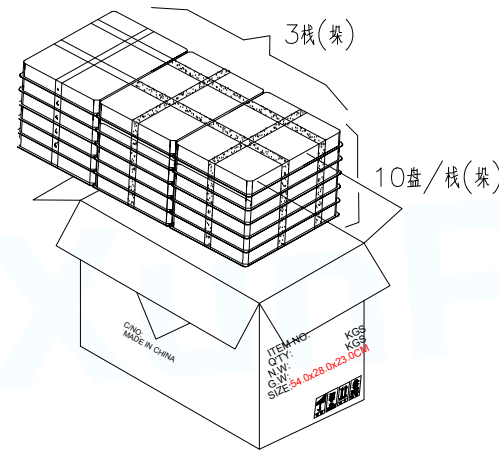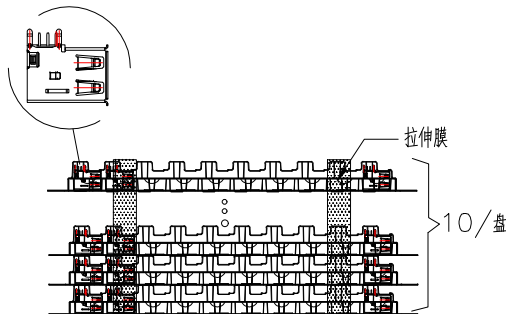

100PCS/盘; 3000PCS/箱

包装规范

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:USB AF 2.0 侧插连体弯脚加塞 13.8高	
			PAR	USB-226-BRY
DECIMALS:	ANGLES:		DWN	Lucas
.X:±0.30	X.:±5°		CHKD	Ethan
.XX:±0.20	X.X:±2°		APVD	Jacob
.XXX:±0.10			SCALE1:1	UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1	REV:A