

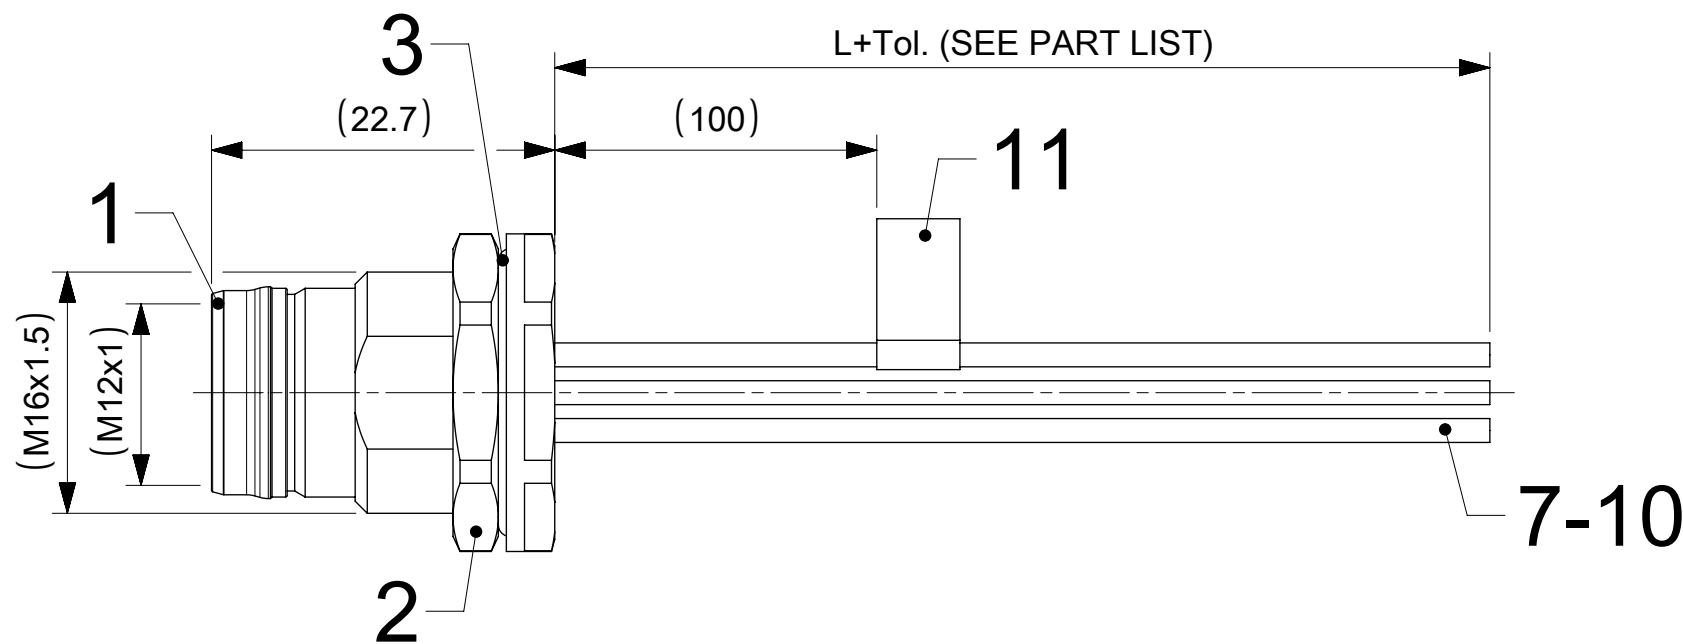



M12 4 POL AC
FEMALE

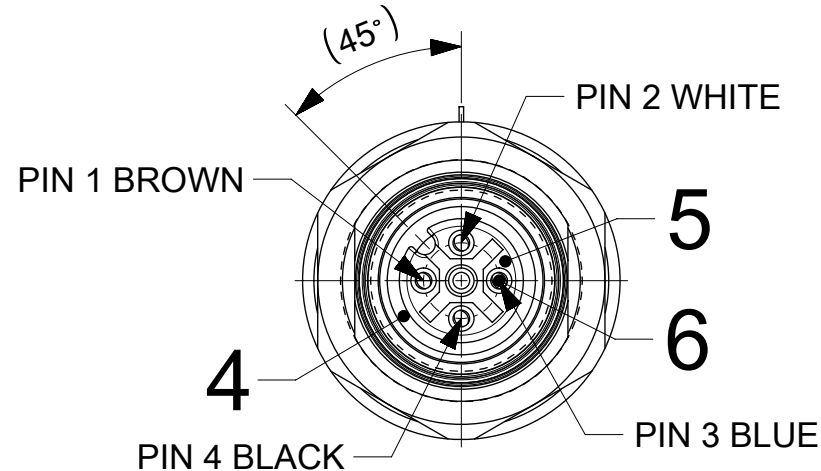


M12 5 POL AC
FEMALE

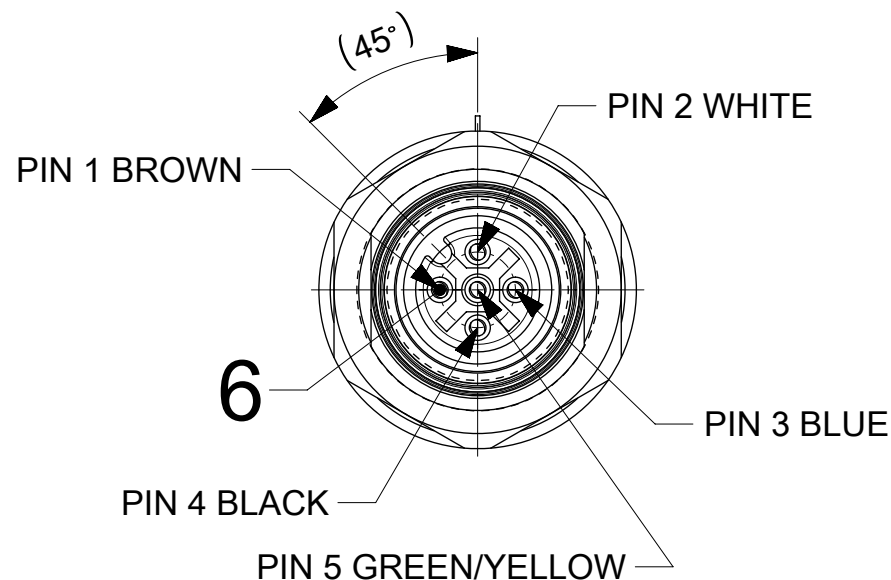


M12 8 POL AC
FEMALE

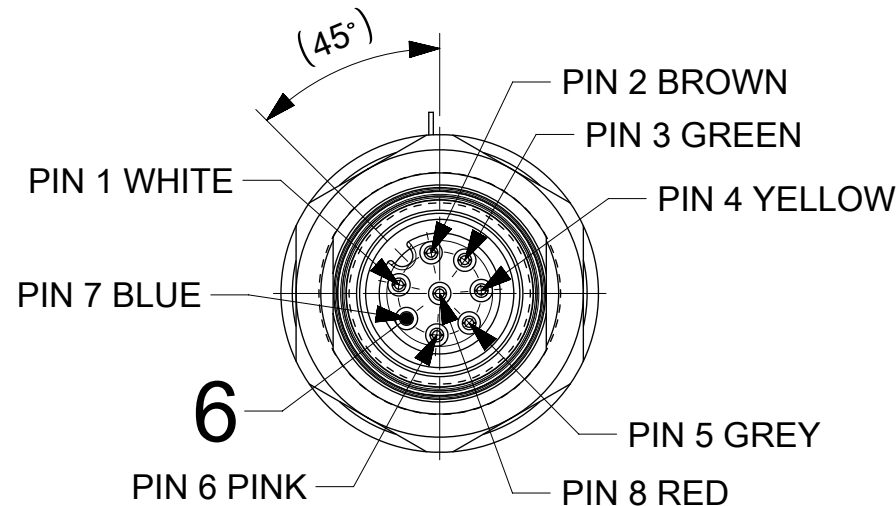

M12 12 POL AC
FEMALE

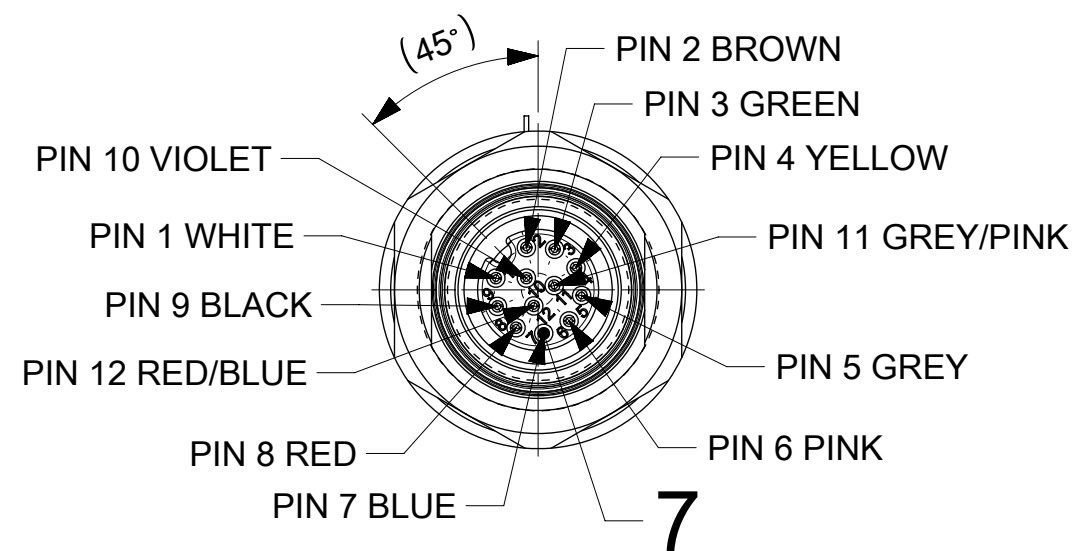

M12 4 POL DC
FEMALE

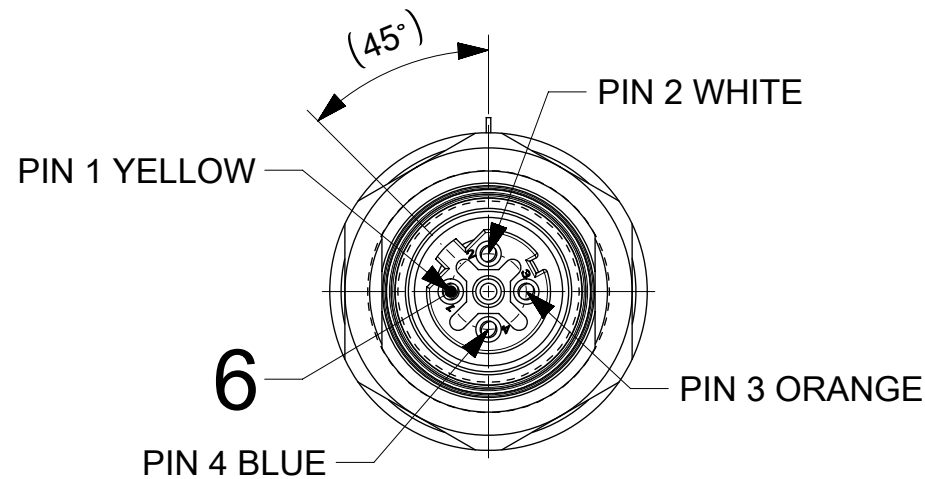

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
	DIMENSION UNITS		SCALE		CURRENT REV DESC: CHANGED MIN. TEMP. IN TABLE			molex							
	mm		2:1												
	GENERAL TOLERANCES (UNLESS SPECIFIED)							REC U12 XP XC FE M16 BM WIR BRASS NI							
	ANGULAR TOL ± 1.0°														
	4 PLACES		±												
	3 PLACES		±		PRODUCT: CUSTOMER DRAWING										
	2 PLACES		± 0.05												
	1 PLACE		± 0.3												
	0 PLACES		± 0.5		DOCUMENT NUMBER			DOC TYPE	DOC PART	REVISION					
DIVISIONAL SYMBOLS		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A3-SIZE		120404		SEE PART LIST		GENERAL MARKET		1 OF 3	

molex

REC U12 XP XC FE M16 BM WIR BRASS NI

PRODUCT CUSTOMER DRAWING

1204040001

PSD 000 A1

10	9	8	7	6	5	4	3	2	1
----	---	---	---	---	---	---	---	---	---

ITEM	QTY	DESCRIPTION	MATERIAL	FINISH/COLOR
1	1	SHELL M16 FE BRASS BM L22.7 NI REC U12	BRASS	Ni
2	1	M16 X 1.5 LOCKNUT NICKEL PLATED		
3	1	GASKET OR EPDM 16X1.5 BK 70	EPDM	BLACK
4	1	GASKET OR FPM 7.1X1.35 RD 60	FPM	RED
5	1	INSERT M12 FE 4P AC TPU BK UNSH	TPU	BLACK
6	4	CONTACT 10 FE STA AU CR WRA 0.14-0.50	BRASS	Au
7	1	WIRE;22AWG;BU;1.58;PVC;17x0.16;UL1569	PVC	BLUE
8	1	WIRE;22AWG;BN;1.58;PVC;17x0.16;UL1569		BROWN
9	1	WIRE;22AWG;BK;1.58;PVC;17x0.16;UL1569		BLACK
10	1	WIRE;22AWG;WH;1.58;PVC;17x0.16;UL1569		WHITE
11	1	LABEL;SELF L.YELLOW(2.25X.75IN)	VINYL	YELLOW
12	-	POTTING MATERIAL	-	-






ITEM	QTY	DESCRIPTION	MATERIAL	FINISH/COLOR
1	1	SHELL M16 FE BRASS BM L22.7 NI REC U12	BRASS	Ni
2	1	M16 X 1.5 LOCKNUT NICKEL PLATED		
3	1	GASKET OR EPDM 16X1.5 BK 70	EPDM	BLACK
4	1	GASKET OR FPM 7.1X1.35 RD 60	FPM	RED
5	1	INSERT M12 FE 5P AC TPU BK UNSH	TPU	BLACK
6	5	CONTACT 10 FE STA AU CR WRA 0.14-0.50	BRASS	Au
7	1	WIRE;22AWG;BU;1.58;PVC;17x0.16;UL1569	PVC	BLUE
8	1	WIRE;22AWG;BN;1.58;PVC;17x0.16;UL1569		BROWN
9	1	WIRE;22AWG;BK;1.58;PVC;17x0.16;UL1569		BLACK
10	1	WIRE;22AWG;WH;1.58;PVC;17x0.16;UL1569		WHITE
11	1	WIRE;20AWG;GN/YE;1.76;PVC;26x0.16;UL1569		GREEN/YELLOW
12	1	LABEL;SELF L.YELLOW(2.25X.75IN)	VINYL	YELLOW
13	-	POTTING MATERIAL	-	-

ITEM	QTY	DESCRIPTION	MATERIAL	FINISH/COLOR
1	1	SHELL M16 FE BRASS BM L22.7 NI REC U12	BRASS	Ni
2	1	M16 X 1.5 LOCKNUT NICKEL PLATED		
3	1	GASKET OR EPDM 16X1.5 BK 70	EPDM	BLACK
4	1	GASKET OR FPM 7.1X1.35 RD 60	FPM	RED
5	1	INSERT M12 FE 8P AC REC PUR BK UNSH	PUR	BLACK
6	8	CONTACT 8 FE TUR AU CR SHORT 7/8POLE	BRASS	Au
7	1	WIRE;24AWG;BU;1.43;PVC;11x0.16;UL1569	PVC	BLUE
8	1	WIRE;24AWG;BN;1.43;PVC;11x0.16;UL1569		BROWN
9	1	WIRE;24AWG;YE;1.43;PVC;11x0.16;UL1569		YELLOW
10	1	WIRE;24AWG;GN;1.43;PVC;11x0.16;UL1569		GREEN
11	1	WIRE;24AWG;GY;1.43;PVC;11x0.16;UL1569		GREY
12	1	WIRE;24AWG;PK;1.43;PVC;11x0.16;UL1569		PINK
13	1	WIRE;24AWG;RD;1.43;PVC;11x0.16;UL1569		RED
14	1	WIRE;24AWG;WH;1.43;PVC;11x0.16;UL1569		WHITE
15	1	LABEL;SELF L.YELLOW(2.25X.75IN)	VINYL	YELLOW
16	-	POTTING MATERIAL	-	-

ITEM	QTY	DESCRIPTION	MATERIAL	FINISH/COLOR
1	1	SHELL M16 FE BRASS BM L22.7 NI REC U12	BRASS	Ni
2	1	M16 X 1.5 LOCKNUT NICKEL PLATED		
3	1	GASKET OR EPDM 16X1.5 BK 70	EPDM	BLACK
4	1	GASKET OR FPM 7.1X1.35 RD 60	FPM	RED
5	1	INSERT M12 FE 12P AC PUR BK SHD	PUR	BLACK
6	1	M12S-FRONT SHELL-FEMALE SHIELD	BRASS	Ni
7	12	M12-Fem-Contact-12pol		Au
8	1	WIRE;26AWG;BU;1.30;PVC;7x0.16;UL1569	PVC	BLUE
9	1	WIRE;26AWG;BN;1.30;PVC;7x0.16;UL1569		BROWN
10	1	WIRE;26AWG;YE;1.30;PVC;7x0.16;UL1569		YELLOW
11	1	WIRE;26AWG;GN;1.30;PVC;7x0.16;UL1569		GREEN
12	1	WIRE;26AWG;GY;1.30;PVC;7x0.16;UL1569		GREY
13	1	WIRE;26AWG;PK;1.30;PVC;7x0.16;UL1569		PINK
14	1	WIRE;26AWG;RD;1.30;PVC;7x0.16;UL1569		RED
15	1	WIRE;26AWG;BK;1.30;PVC;7x0.16;UL1569		BLACK
16	1	WIRE;26AWG;VT;1.30;PVC;7x0.16;UL1569		VIOLET
17	1	WIRE;26AWG;WH;1.30;PVC;7x0.16;UL1569		WHITE
18	1	WIRE;26AWG;GY/PK;1.30;PVC;7x0.16;UL1569		GREY/PINK
19	1	WIRE;26AWG;RD/BU;1.30;PVC;7x0.16;UL1569		RED/BLUE
20	1	LABEL;SELF L.YELLOW(2.25X.75IN)	VINYL	YELLOW</


FORMAT: master-tb-mod-A3
REVISION: J
DATE: 2020/01/14

10	9	8	7	6	5	4	3	2	1
----	---	---	---	---	---	---	---	---	---

POLES	4 POLE	5 POLE	8 POLE	12 POLE	4 POLE
LAYOUT					
VOLTAGE RATING	250V	60V	30V	30V	250V
CODING	A - Code	A - Code	A - Code	A - Code	D - Code
AMPERE RATING	4A	4A	2A	1.5A	4A
PROTECTION CLASS CONNECTOR INTERFACE SHELL TO ENCLOSURE	IP 67/69K (in mated condition / when properly installed)				
OPERATING TEMP.	-40°C / 85°C				
UL CERTIFICATION	FILE NO. E152210				
CSA CERTIFICATION	FILE NO. LR6837				
WIRE LEAD	0.34 mm ² PVC	0.34 mm ² PVC	0.25 mm ² PVC	0.14 mm ² PVC	0.34 mm ² PVC
PIN DIAMETER	1.0 mm	1.0 mm	0.8 mm	0.6 mm	1.0 mm
WIRE COLOR	ACCORDING TO IEC 60947-5-2		ACCORDING TO DIN 47100		ACC. TO IEC 60947-5-2

NOTE:
1. PANEL THICKNESS MAX. 6.2mm

RECOMMENDED PANEL CUTOUT

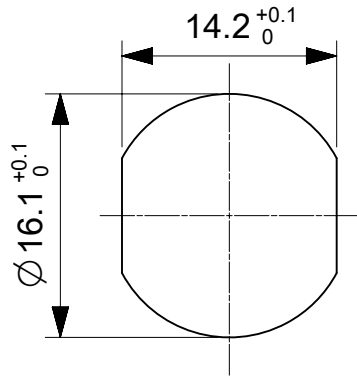

PART LIST 4P AC

MOLEX P/N	ENGINEERING NUMBER	DESCRIPTION	L [mm]	TOL
1204040001	YR4U40E03C300	REC U12 4P AC FE M16 BM WIR BRASS NI 0.3M	300	+40
1204040031	YR4U40E03C500	REC U12 4P AC FE M16 BM WIR BRASS NI 0.5M	500	+40

PART LIST 5P AC

MOLEX P/N	ENGINEERING NUMBER	DESCRIPTION	L [mm]	TOL
1204040002	YR5U40E03C300	REC U12 5P AC FE M16 BM WIR BRASS NI 0.3M	300	+40
1204040032	YR5U40E03C500	REC U12 5P AC FE M16 BM WIR BRASS NI 0.5M	500	+40

PART LIST 8P AC


MOLEX P/N	ENGINEERING NUMBER	DESCRIPTION	L [mm]	TOL
1204040003	YR8U40E02C300	REC U12 8P AC FE M16 BM WIR BRASS NI 0.3M	300	+40
1204040033	YR8U40E02C500	REC U12 8P AC FE M16 BM WIR BRASS NI 0.5M	500	+40

PART LIST 12P AC

MOLEX P/N	ENGINEERING NUMBER	DESCRIPTION	L [mm]	TOL
1204040004	YRCU40E01C300	REC U12 12P AC FE M16 BM WIR BRASS NI 0.3M	300	+40
1204040034	YRCU40E01C500	REC U12 12P AC FE M16 BM WIR BRASS NI 0.5M	500	+40

PART LIST 4P DC

MOLEX P/N	ENGINEERING NUMBER	DESCRIPTION	L [mm]	TOL
1204063001	ERYA2U40E03C300	REC U12 4P DC FE M16 BM WIR BRASS NI 0.3M	300	+40
1204063004	ERYA2U40E03C500	REC U12 4P DC FE M16 BM WIR BRASS NI 0.5M	500	+40

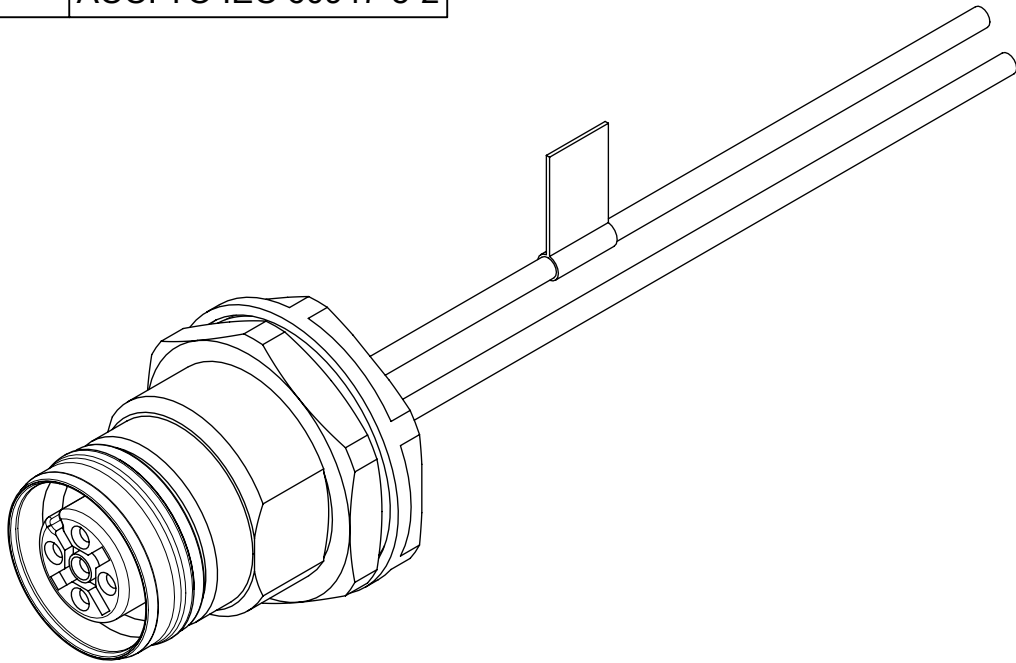

FUNCTIONAL SYMBOLS $\overline{F_A} = 0$ $\overline{F_E} = 0$ $\overline{F_P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
	DIMENSION UNITS		SCALE		CURRENT REV DESC: CHANGED MIN. TEMP. IN TABLE					molex								
	mm		2:1															
	GENERAL TOLERANCES (UNLESS SPECIFIED)									REC U12 XP XC FE M16 BM WIR BRASS NI								
	ANGULAR TOL ± 1.0°																	
	4 PLACES		±															
	3 PLACES		±															
	2 PLACES		± 0.05															
	1 PLACE		± 0.3		INITIAL REVISION: DRWN: FDAFERNER 2021/02/10 APPR: RSILLER 2022/07/12					DOCUMENT NUMBER			DOC TYPE		DOC PART		REVISION	
	0 PLACES		± 0.5							1204040001			PSD		000		A1	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER			SHEET NUMBER			
						A3-SIZE		120404		SEE PART LIST		GENERAL MARKET			3 OF 3			

DOCUMENT STATUS	P1	RELEASE DATE	2023/01/31 08:21:35
-----------------	----	--------------	---------------------