


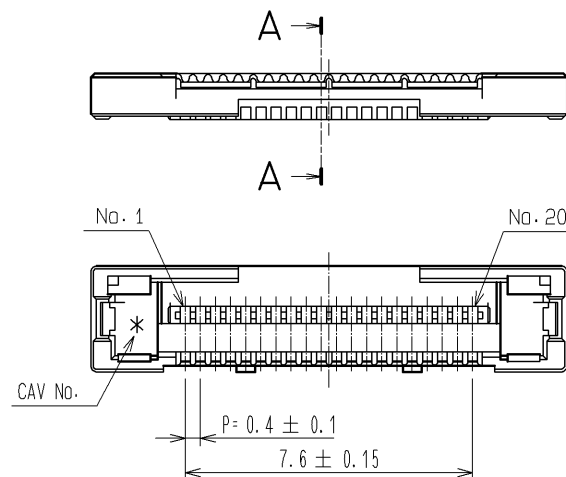
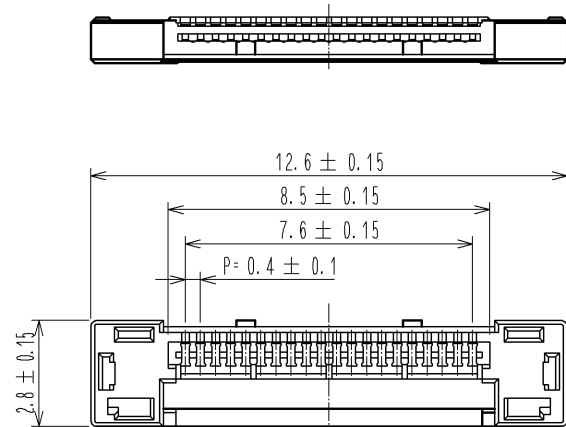
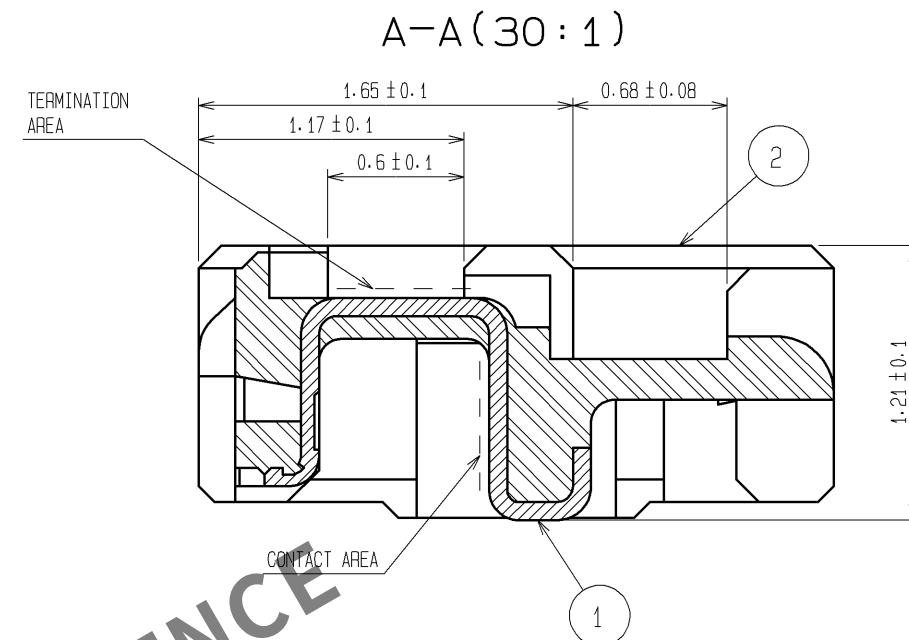


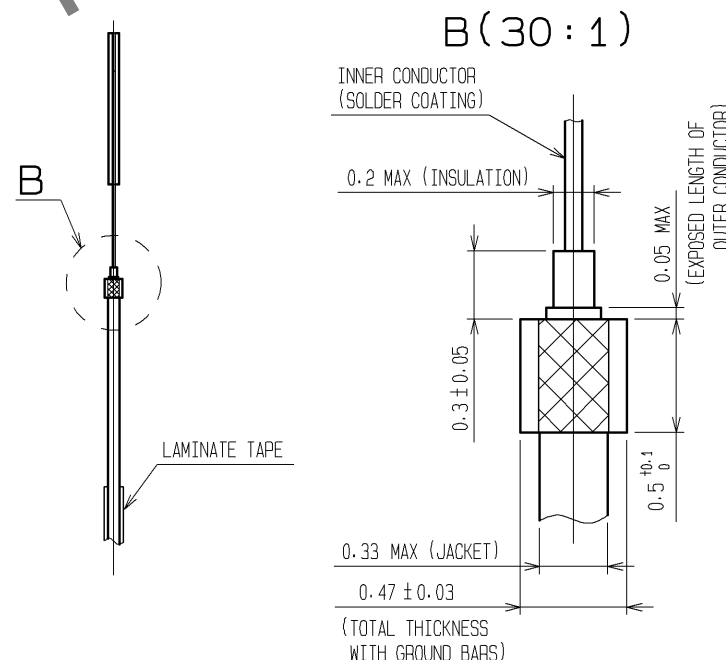

RECOMMENDED CABLE SUBASSEMBLY

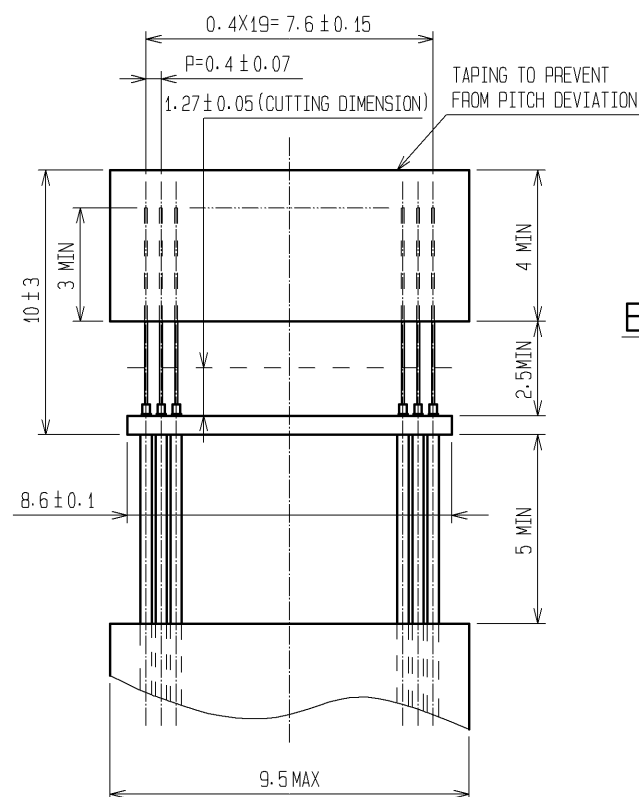

CABLE TERMINATION FIGURE(30:1)

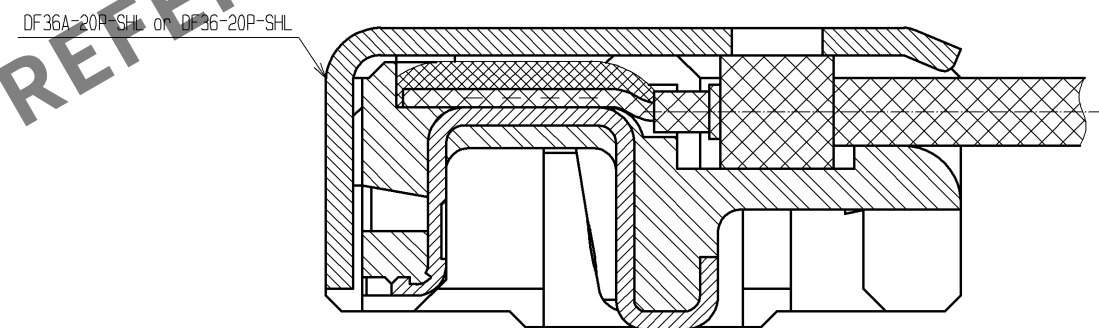

- NOTES 1. APPLICABLE CABLE: THIN COAXIAL CABLE (AWG#42-AWG#46)  
2. THIS CONNECTOR IS NOT HOT PLUGGABLE. MATE AND UNMATE WHILE THE POWER IS OFF.  
3. THE ASSEMBLY IS COMPLETED BY COMBINING TWO PARTS "CONNECTOR UNIT AND METAL SHIELDING". REFER TO THE TABLE FOR EACH ITEM No., PART NAME, PART No. AND CODE No.  
APPLICABLE SHELL IS DIFFERENT DEPENDING ON THE PART No. OF MATED CONNECTOR.  
USE DF36A-20P-SHL FOR DF36A-20S-0.4V(\*\*), USE DF36-20P-SHL FOR DF36-20S-0.4V(\*\*).

| ITEM No. | PART NAME       | PART No.           | CODE No.        |
|----------|-----------------|--------------------|-----------------|
| 1, 2     | CONNECTOR UNIT  | DF36-20P-0.4SD(55) | CL662-4040-2-55 |
| -        | METAL SHIELDING | DF36A-20P-SHL      | CL662-4042-8-00 |
| -        | METAL SHIELDING | DF36-20P-SHL       | CL662-4041-5-00 |

|                                    |                 |                                                                                                                              |     |           |                 |
|------------------------------------|-----------------|------------------------------------------------------------------------------------------------------------------------------|-----|-----------|-----------------|
| 1                                  | PHOSPHOR BRONZE | CONTACT AREA : GOLD PLATING 0.1μm min<br>TERMINATION AREA : GOLD PLATING 0.1μm min<br>UNDER PLATING : NICKEL PLATING 1μm min | 5   | PS        | BLACK           |
| NO.                                | MATERIAL        | FINISH, REMARKS                                                                                                              | 4   | POLYESTER | CLEAR           |
| UNITS<br>mm                        | SCALE<br>5 : 1  | COUNT<br>△                                                                                                                   | 3   | PS        | CLEAR           |
| DESCRIPTION OF REVISIONS           | DESIGNED        | CHECKED                                                                                                                      | 2   | LCP       | UL94V-0, BLACK  |
| APPROVED : MH. YAMANE 14. 07. 18   | DRAWING NO.     | EDC3-320378-02                                                                                                               | NO. | MATERIAL  | FINISH, REMARKS |
| CHECKED : MH. TSUCHIDA 14. 07. 17  | PART NO.        | DF36-20P-0.4SD(55)                                                                                                           | NO. | MATERIAL  | FINISH, REMARKS |
| DESIGNED : AH. MIYAZAKI 14. 07. 16 | CODE NO.        | CL662-4040-2-55                                                                                                              | NO. | MATERIAL  | FINISH, REMARKS |
| DRAWN : AH. MIYAZAKI 14. 07. 16    | DATE            | 14. 07. 16                                                                                                                   | NO. | MATERIAL  | FINISH, REMARKS |

**HRS** HIROSE ELECTRIC CO., LTD.

