


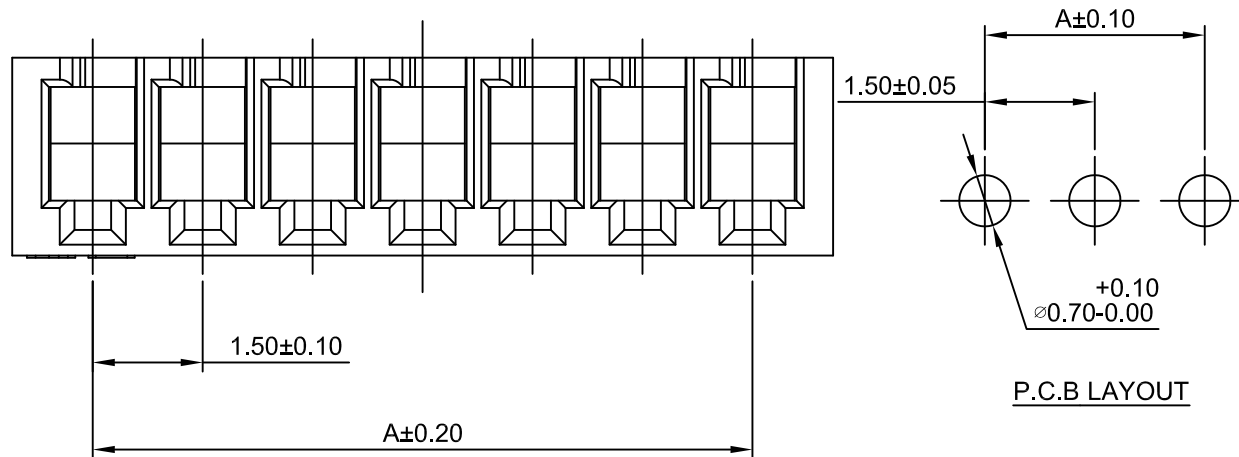

Ordering Information:

B1502H-XP - ***
1 2

1.Part No.

2.Material:

(blank) - Nylon 66,UL94V-0

GWT - Nylon 66,UL94V-0,GWT 750 °C

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 200V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.50	3.70	9P	12.00	14.20
3P	3.00	5.20	10P	13.50	15.70
4P	4.50	6.70	11P	15.00	17.20
5P	6.00	8.20	12P	16.50	18.70
6P	7.50	9.70	13P	18.00	20.20
7P	9.00	11.20	14P	19.50	21.70
8P	10.50	12.70	15P	21.00	23.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	10:1	1 of 1

Draw By:	Approved :
Dlankul Wan	Jack Yin

General Tolerance

A1	ADD THE INFORMATION	2019.04.08	x.x±0.25	PROJECT ⊕ ⊖
A0	NEW RELEASE	2005.05.10	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	

Title :
1.50mm Pitch
Housing

DRAW NO : B1502H-XP REV A1

