


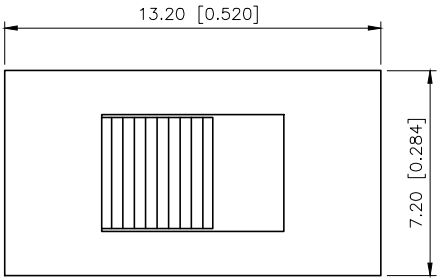
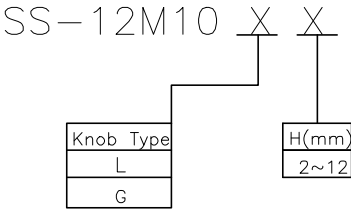


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.17	阿树

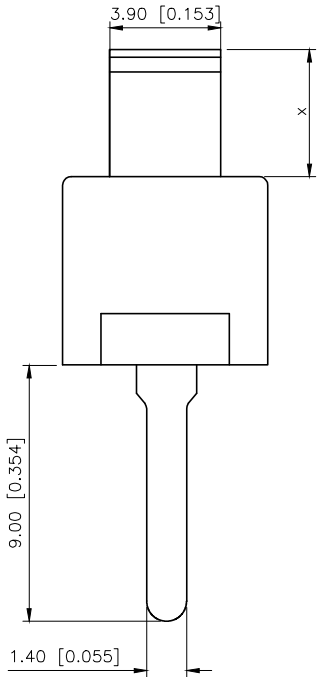

Specification:
1.Rating:6A 120VAC
2.Contact resistance:≤30 mΩ
3.Insulation resistance:≥100 MΩ(DC500V/Min)
4.Electronics life:>10000 cycles
5.Operation force:250±100gf

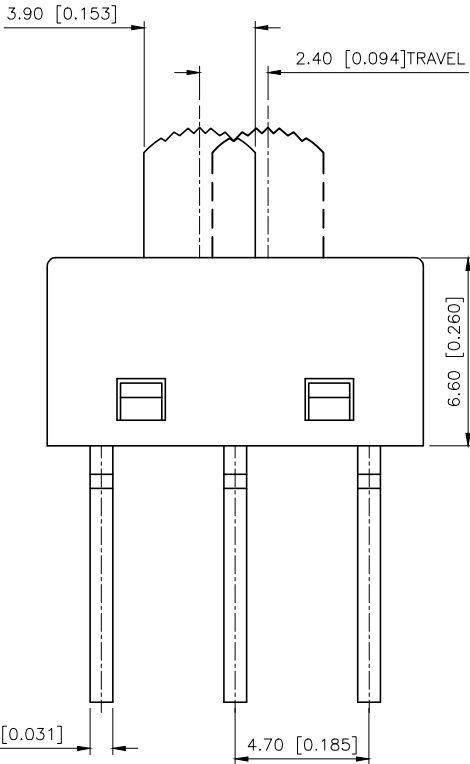

7	Terminal	1	Phosphor bronze	Plating silvering
6	Bridge piece	1	Phosphor bronze	Plating silvering
5	Spring	1	carbon steel	
4	Rotor	1	Iron sleeve	NI
3	Base	1	PA46	
2	Shell	1	PA46	
1	Keystake	1	PA66	
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

Function		
ON	NA	ON
	/	

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuces	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:	
UNIT:	mm/in
SIZE:	A4

MODEL TYPE:	SLIDE SWITCH
PART NO.:	SS-12M10xx
DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1