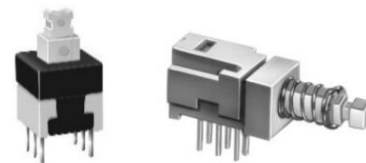


Application

- ✓ TV/Video, Audio, Home appliance, Precision apparatus, Automotive, Office equipment, Communication, Musical instruments, Industrial control, Others



Feature

- ✓ Small size push button switches with good feeling.

■Specification

Operating Temperature Range	-10 °C~70°C
Standard Contact Resistance	< 50 mΩ
Operating Life Cycle	10,000 cycles

■How to order

SP70018F - 0202 - 13F1 - N N - N

Model

SP – Push Switch

Number of Pole and Position

Ex. 0102 – 1 pole 2 positions

0402 – 4 poles 2 positions

Actuator

Timing

Order Code	Description
N	Non-Shorting (break-before-make)
S	Shorting (make-before-break)

Mechanical Configuration

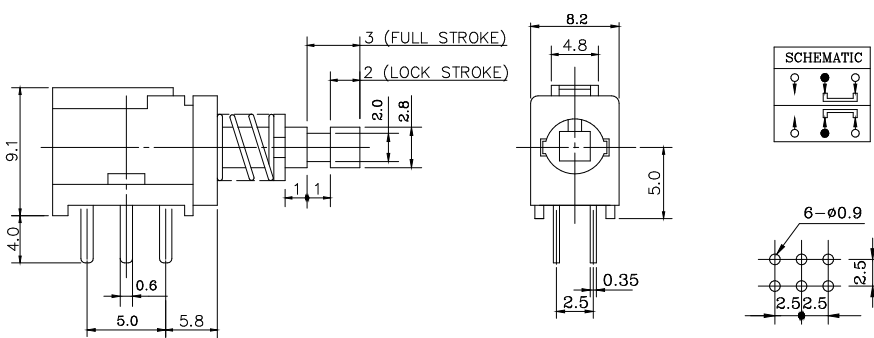
Order Code	Description
N	Non-lock
Blank	Lock

Plating of Casing


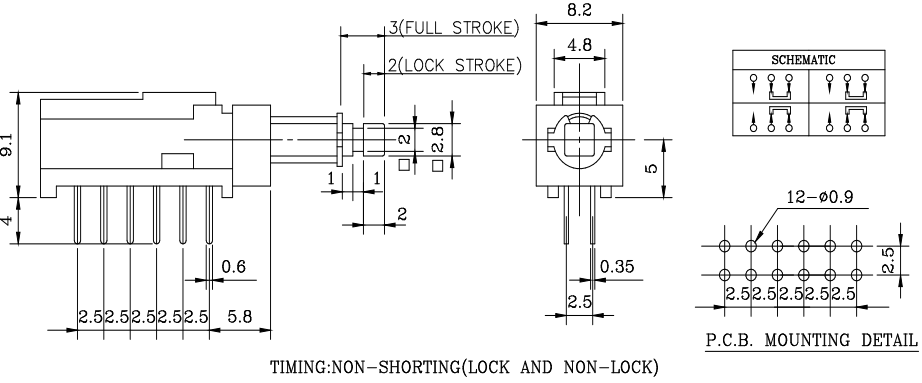
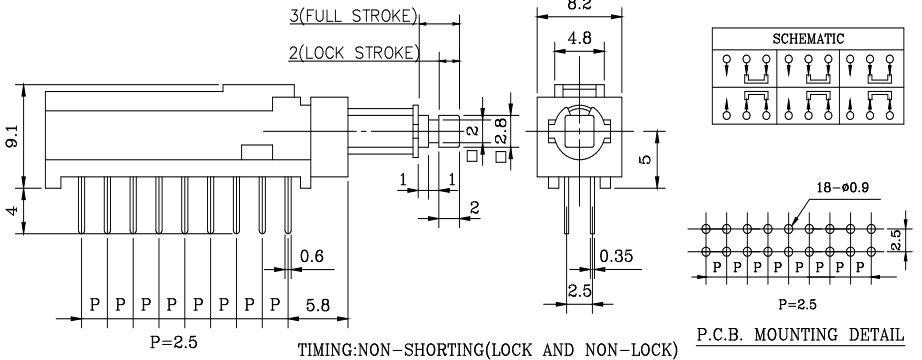

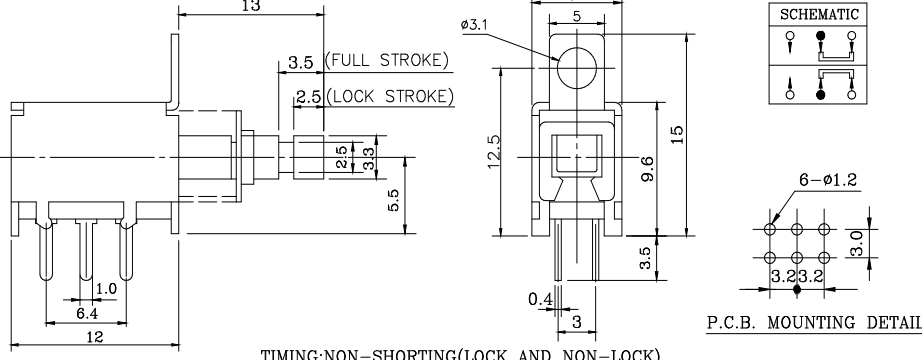
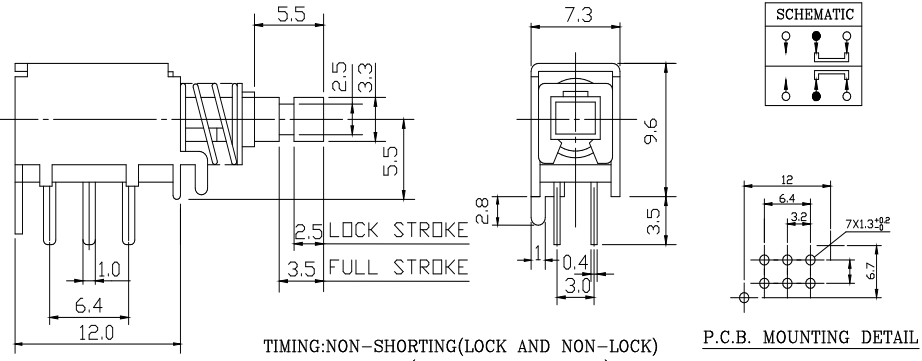
Order Code	Description
N	Nickel plated
Blank	Plastic case

■Model Description

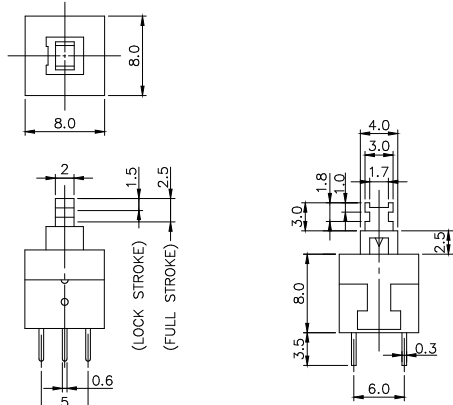

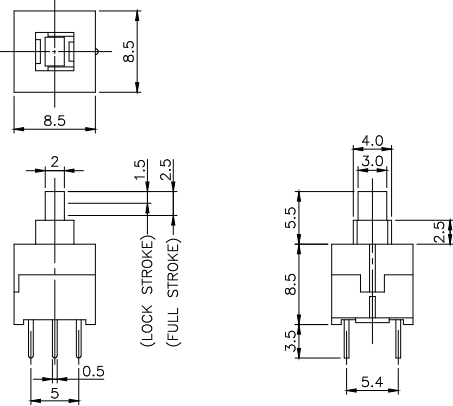



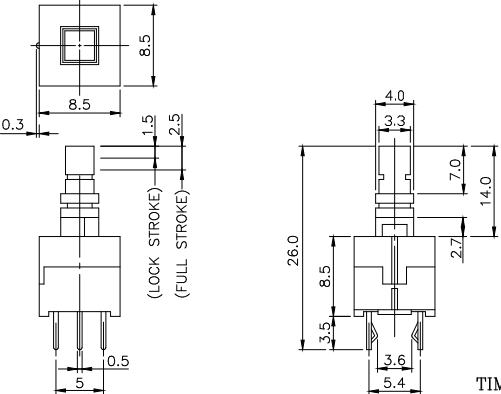



Model	Pole / Position	Operation Force	Rating	Timing	Mechanical Configuration
SP70300F-0202	2 poles, 2 positions	300±150gf.cm	DC30V, 0.1A	Non-Shorting	Lock /Non-lock
SP70300F-0402	4 poles, 2 positions	300±150gf.cm	DC30V, 0.1A	Non-Shorting	Lock /Non-lock
SP70300F-0602	6 poles, 2 positions	300±150gf.cm	DC30V, 0.1A	Non-Shorting	Lock /Non-lock
SP70018F-0202	2 poles, 2 positions	300±150gf.cm	AC125V, 0.3A	Non-Shorting	Lock /Non-lock
SP70030F-0202	2 poles, 2 positions	300±150gf.cm	AC125V, 0.3A	Non-Shorting / Shorting	Lock /Non-lock
SP80010F-0202	2 poles, 2 positions	150±80gf.cm	DC30V, 0.1A	Non-Shorting	Lock /Non-lock
SP80050F-0202	2 poles, 2 positions	200±80gf.cm	DC30V, 0.3A	Non-Shorting	Lock /Non-lock
SP8005BF-0202	2 poles, 2 positions	200±80gf.cm	DC30V, 0.3A	Non-Shorting	Lock /Non-lock

Order Code	Outline Drawing
SP70300F-0202-11F1-N SP70300F-0202-11F1-N-N 	 3 (FULL STROKE) 2 (LOCK STROKE) 8.2 4.8 5.0 0.35 2.5 9.1 4.0 0.6 5.0 5.8 1 1 2.0 2.0 SCHEMATIC 6-ø0.9 2.5 2.5 1.5 P.C.B. MOUNTING DETAIL TIMING:NON-SHORTING(LOCK AND NON-LOCK)

[Back to top](#)

Order Code	Outline Drawing
SP70300F-0402-11F1-N SP70300F-0402-11F1-N-N 	 TIMING:NON-SHORTING(LOCK AND NON-LOCK)
SP70300F-0602-11F1-N SP70300F-0602-11F1-N-N 	 TIMING:NON-SHORTING(LOCK AND NON-LOCK)
SP70018F-0202-13F1-NN SP70018F-0202-13F1-NN-N 	 TIMING:NON-SHORTING(LOCK AND NON-LOCK)
SP70030F-0202-13F1-NN(-N) SP70030F-0202-13F1-SN(-N) 	 TIMING:NON-SHORTING(LOCK AND NON-LOCK) TIMING:SHORTING(LOCK AND NON-LOCK)

[Back to top](#)

Order Code	Outline Drawing
SP80010F-0202-10F5-N SP80010F-0202-10F5-N-N 	  PUSH 2-3 ON 4-5 ON FREE 1-3 ON 4-6 ON TIMING:NON-SHORTING(LOCK AND NON-LOCK)
SP80050F-0202-5.5F-N SP80050F-0202-5.5F-N-N 	 <u>SCHEMATIC</u>  FREE  PUSH  TIMING:NON-SHORTING(LOCK AND NON-LOCK)
SP8005BF-0202-14F-N SP8005BF-0202-14F-N-N 	 <u>SCHEMATIC</u>  FREE  PUSH  TIMING:NON-SHORTING(LOCK AND NON-LOCK)

Design and specifications presented here are for the standard parts only. Please kindly contact us for your special requests and ask for the current technical specifications before purchase and/or use.

[Back to top](#)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Alpha \(Taiwan\):](#)

[SP70030F-0202-13F1-01-NN](#)