

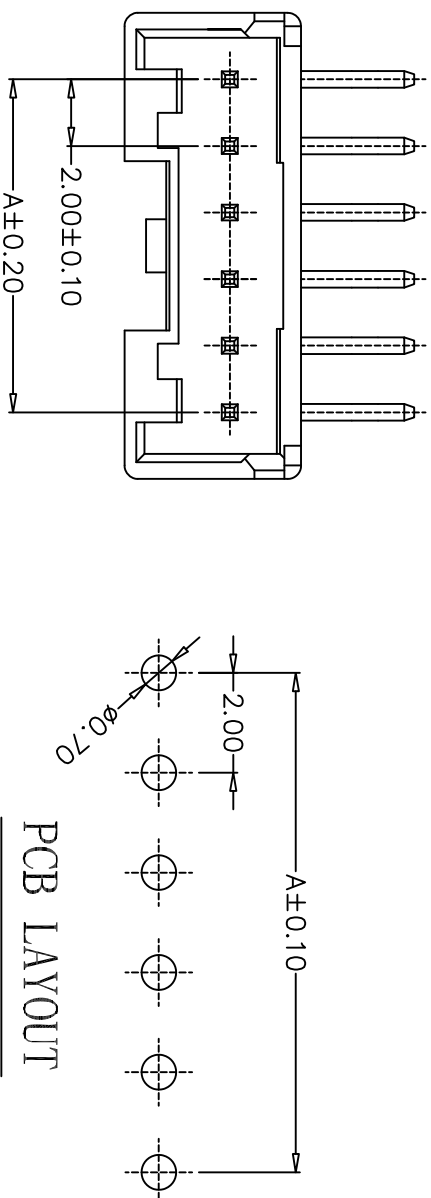


RoHS

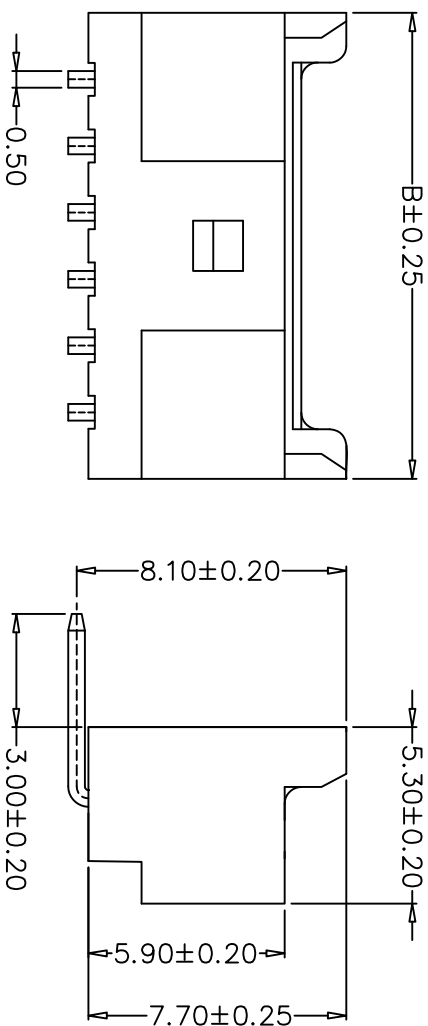

PCB LAYOUT

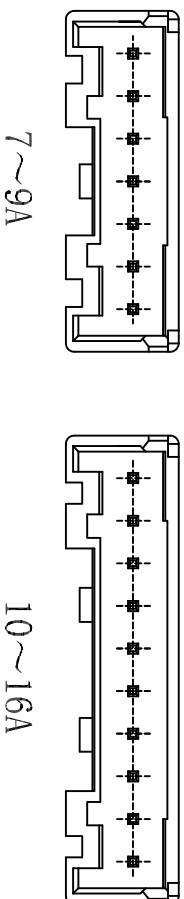

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 100V AC, DC
- 3、Temperature Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltage: 800V AC/minute
- 7、Material: Wafer PA66, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
A2026-02AW	2.00	8.00
A2026-03AW	4.00	10.00
A2026-04AW	6.00	12.00
A2026-05AW	8.00	14.00
A2026-06AW	10.00	16.00
A2026-07AW	12.00	18.00
A2026-08AW	14.00	20.00
A2026-09AW	16.00	22.00
A2026-10AW	18.00	24.00
A2026-11AW	20.00	26.00
A2026-12AW	22.00	28.00
A2026-16AW	30.00	36.00

	单位 UNIT	mm
比例 SCALE		
X. ±0.5	X. ±	
. X ±0.30	. X ±	
. XX ±0.20	. XX ±	
. XXX ±0.005, XXX ±	. XXX ±	

核准: APPROVED BY	版本: A0	产品名称 Product name	PA引脚 WAFER DIP TYPE
审核: CHECKED BY	页次: 1/1	产品料号 Product No	TTH-A2026-AAW
制图: DRAWN BY	封文辉 2022.9.5	客户料号 Client No	

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd