
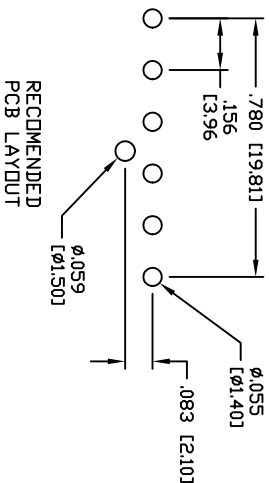
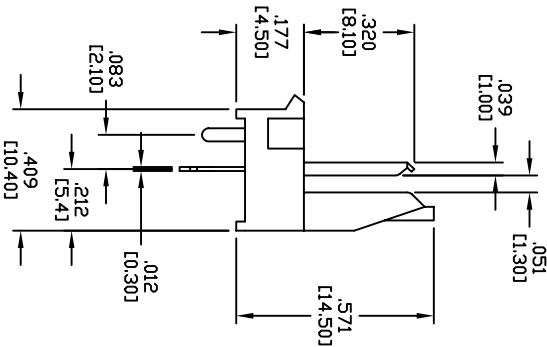


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/12/04	

APPROVED: _____

DATE: _____ TITLE: _____

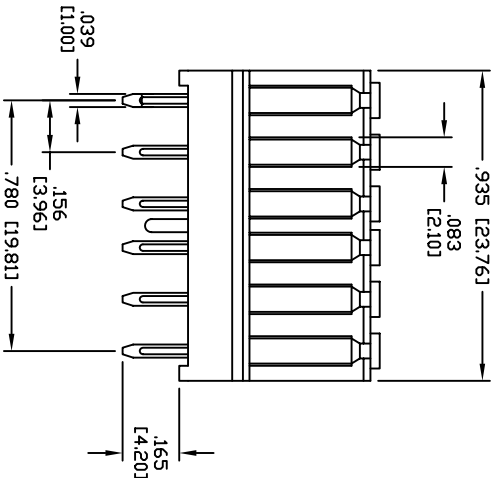

SPECIFICATIONS:

Material: Nylon 66, rated UL 94V-0
Insulator color: Natural
Contacts: Brass
Contact Plating: Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC max
Current rating: 20 Amps max
Contact resistance: 12.24 mohms
Insulation resistance: 5000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC for 1 minute
Mechanical:
Durability: 50 Cycles min.
Temperature Rating: Operating temperature: -65°C to +125°C

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: POWER LATCH HEADER, 6 PIN, STRAIGHT,
PCB MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLES	
.X	± .10	Ø.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010	Ø.XXX	± .010
APPROVALS		DATE			
DRAWN	SS	8/12/04			
CHECKED					
APPROVED					
SIZE		PART NO.		REV.	
X		PLHB-06-TS		-	
REF:		SCALE: NTS		SHEET 1 OF 1	