

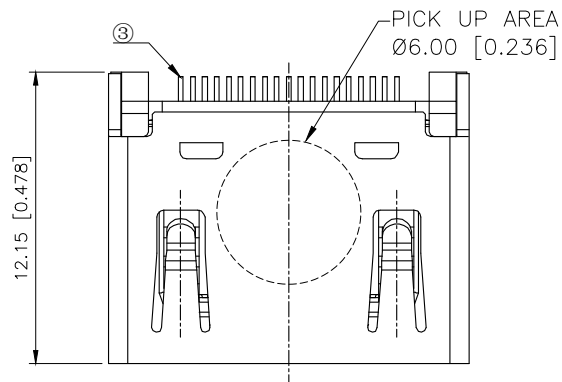
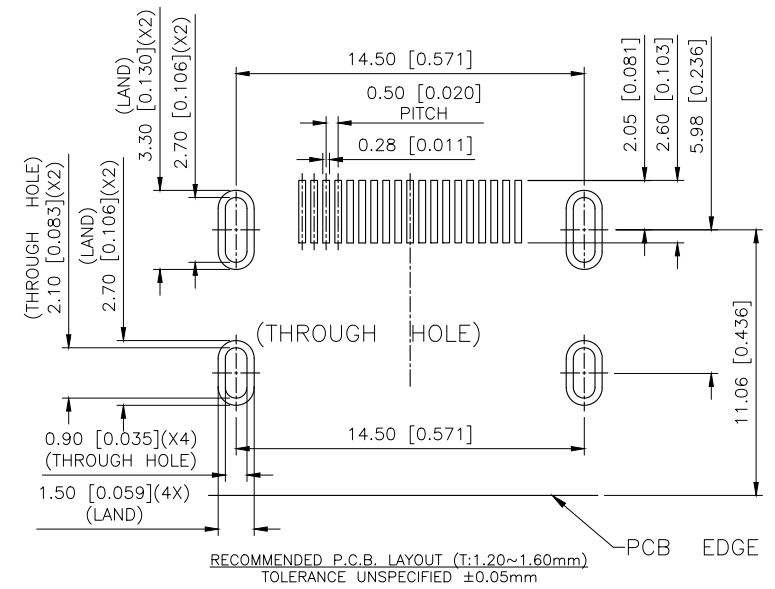


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.03.03	阿树

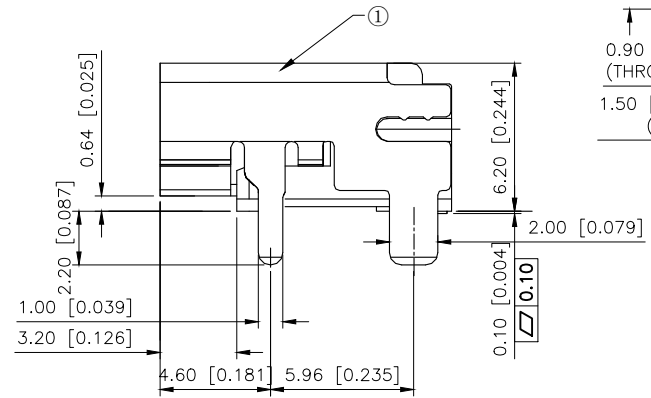


- SPECIFICATIONS
- 1.OPERATING CURRENT:0.5A MAX.
 - 2.OPERATION TEMPERATURE:-25 TO +85
 - 3.DIELECTRIC WITHSTANDING VOLTAGE:
500Volts AC BETWEEN ADJACENT TERMINAL(UNMATE)
300Volts AC BETWEEN ADJACENT TERMINAL(MATE)
 - 4.INSULATION RESISTANCE:
100Mohm MIN(UNMATED);10Mohm MIN.(MATED)
 - 5.HDMI SPECIFICATION COMPLIANCE

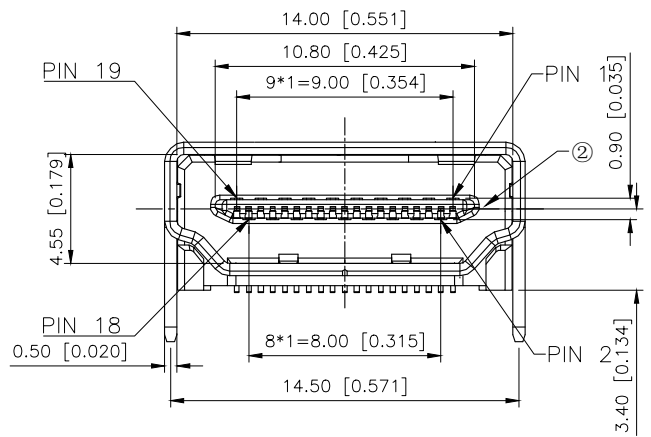

A71-05H5-1X1N1

1:Au 1U"
5:Au 15U"
6:Au 30U"

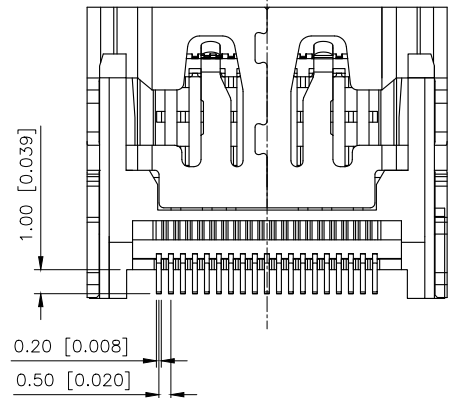

ROHS COMPLIANCE

3	CONTACTS	19	COPPER ALLOY,GOLD PLATED OVER NICKEL ON CONTACT AREA AND 100u" MIN.TIN PLATED OVER NICKEL ON SOLDER TAILS
2	HOUSING	1	THERMOPLASTIC UL94V-0
1	SHELL	1	COPPER ALLOY, NICKEL PLATED

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: HDMI CONNECTOR
CHECKED		UNIT: mm/in	PART NO.: A71-05H5-1X1N1
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1