

# BLM15AG601SN1#

“#” indicates a package specification code.

In Production

RoHS


REACH

< List of part numbers with package codes >

BLM15AG601SN1B BLM15AG601SN1D BLM15AG601SN1J

## Appearance & Shape

## Features

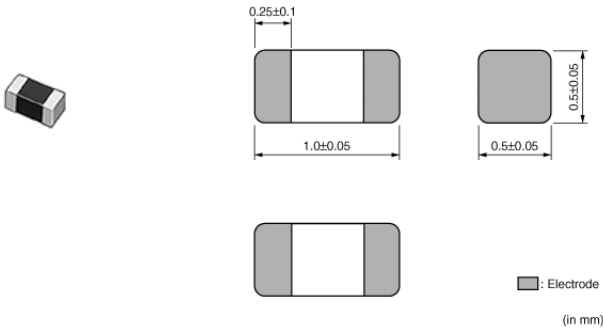

The chip ferrite beads BLM series is designed to function nearly as a resistor at noise frequencies, which greatly reduces the possibility of resonance and leaves signal wave forms undistorted. BLM series is effective in circuits without stable ground lines because BLM series does not need a connection to ground. The nickel barrier structure of the external electrodes provides excellent solder heat resistance. BLM\_A series generates an impedance from the relatively low frequencies. Therefore BLM\_A series is effective in noise suppression in a wide frequency range (30MHz to several hundred MHz).

## Applications

|             |             |
|-------------|-------------|
| Other Usage | For general |
|-------------|-------------|

## Packaging Information

| Packaging | Specifications   | Minimum Order Quantity |
|-----------|------------------|------------------------|
| B         | Bulk(Bag)        | 1000                   |
| D         | 180mm Paper Tape | 10000                  |
| J         | 330mm Paper Tape | 50000                  |

**Attention**  
1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.  
2.This datasheet has only typical specifications because there is no space for detailed specifications.  
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# BLM15AG601SN1#

“#” indicates a package specification code.



## Specifications

|                                 |                |
|---------------------------------|----------------|
| Shape                           | SMD            |
| Size Code (in mm)               | 1005           |
| Size Code (in inch)             | 0402           |
| Length                          | 1.0mm          |
| Length Tolerance                | ±0.05mm        |
| Width                           | 0.5mm          |
| Width Tolerance                 | ±0.05mm        |
| Thickness                       | 0.5mm          |
| Thickness Tolerance             | ±0.05mm        |
| Impedance (at 100MHz)           | 600Ω           |
| Impedance (at 100MHz) Tolerance | ±25%           |
| Rated Current (at 85°C)         | 300mA          |
| Rated Current (at 125°C)        | 300mA          |
| DC Resistance(max.)             | 0.52Ω          |
| Operating Temperature Range     | -55°C to 125°C |
| Mass(typ.)                      | 0.001g         |
| Number of Circuit               | 1              |


### Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications.  
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.


BLM15AG601SN1#

"#" indicates a package specification code.

Product Data

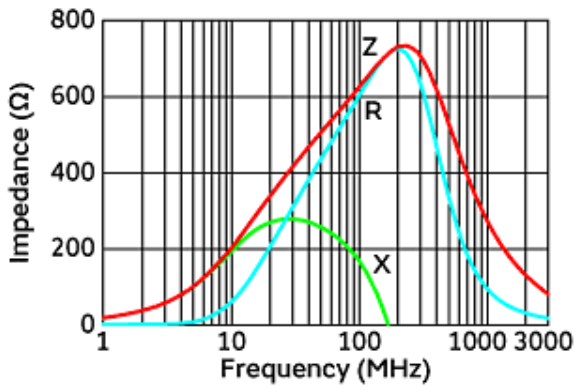

Impedance-Frequency Characteristics

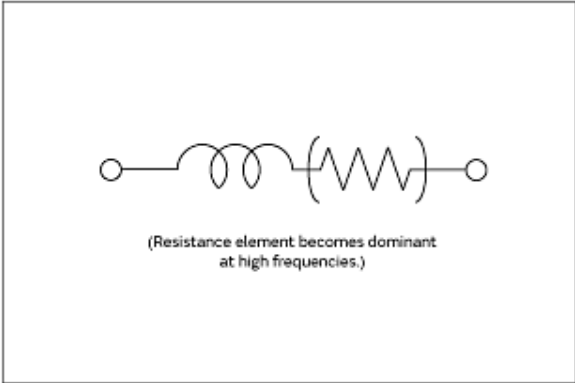

Equivalent Circuit

**Attention**  
1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.  
2.This datasheet has only typical specifications because there is no space for detailed specifications.  
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.