



RoHS

MAPX

MODIFICATION

DRW





DATE

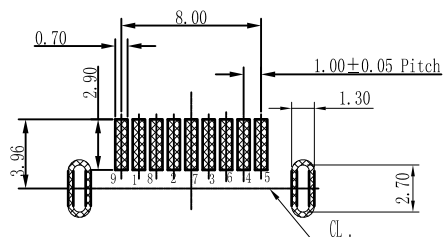

P. C. B LAYOUT T=1.20mm TOL:±0.05

Specifications:

- 1.Current Rating:1.0A at 30V AC.
- 2.Withstanding Voltage:100V AC for one minute.
3. Insulation Resistance:100MΩ Min.
- 4.Contact Resistance:30mΩ Max.
- 5.Mating Force:3.57kgf Max.
- 6.Unmating Force:1.02kgf Min.
- 7.Operating Temperature:-25℃~+85℃.

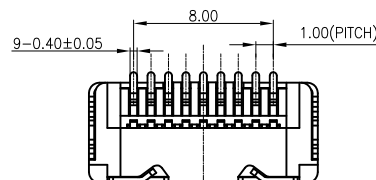

4	5P端子	C5191	——	GOLD/TIN PLATED
3	4P端子	C5191	——	GOLD/TIN PLATED
2	主体	LCP	BLUE	UL 94V-0
1	外壳	C2680	——	NICKEL/GOLD PLATED
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.25	X.	±5°
.X	±0.20	.X	±2°
.XX	±0.15	.XX	±1°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	916-862A205EY10200
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	USB AF 3.0立式11.6夹板脚无边不锈钢蓝胶SMT
日期 DATE	2021-04-14	核准 APPD	黄国荣	角法 VIEW	版本 VER
					A0