



Connectors > Connector Accessories > Connector Seals & Cavity Plugs



Connector Seal & Plug Type: **Gang Wire Seal**

Primary Product Material: **Silicone Rubber**

Primary Product Color: **Blue**

Compatible Insulation Diameter Range: **2.45 – 3.6 mm [.097 – .142 in]**

Operating Temperature (Max): **105 °C [221 °F]**

Features

Product Type Features

Connector Seal & Plug Type	Gang Wire Seal
----------------------------	----------------

Configuration Features

Number of Positions	1
---------------------	---

Body Features

Primary Product Material	Silicone Rubber
Primary Product Color	Blue

Dimensions

Compatible Insulation Diameter Range	2.45 – 3.6 mm[.097 – .142 in]
--------------------------------------	-------------------------------

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	



Current ECHA Candidate List: JUNE 2024 (241)
Candidate List Declared Against: JAN 2024 (240)
SVHC > Threshold:
Octamethylcyclotetrasiloxane (D4) (.5% in Component Part)
Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part)
Decamethylcyclopentasiloxane (D5) (.5% in Component Part)

Article Safe Usage Statements:
Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




TE Part # 1-2381260-1
Power Versa-Lock PLUG, 1X1 KEY A, GWT

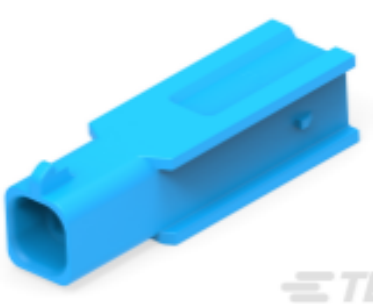

TE Part # 1-2381313-1
Power Versa-Lock FH CAP, 1X1 KEY A, GWT

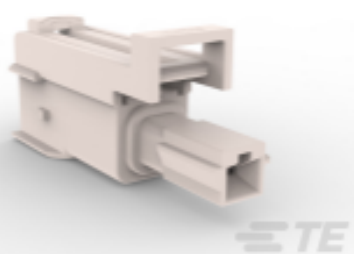

TE Part # 1-2345728-1
Power Versa-Lock PLUG, 1X1 KEY A

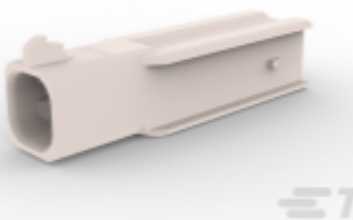

TE Part # 1-2345729-1
Power Versa-Lock FH CAP, 1X1 KEY A

Also in the Series | Power Versa-Lock 5.0



Connector Caps & Covers(4)

Connector Contacts(12)

Connector Hardware(5)

Connector Seals & Cavity Plugs(9)

Insertion & Extraction Tools(2)

Rectangular Power Connectors(77)

Customers Also Bought

TE Part #5-2232263-4
PTL 1X4 CAP PANEL MT GLW WIRE
KEY A DGR

TE Part #5-2232265-4
POWER TRIPLE LOCK Glow Wire Plug

TE Part #1971782-1
Tab Contact — POWER TRIPLE LOCK

TE Part #1971781-1
PTL RECEPTACLE CONTACT, 14 AWG

TE Part #53245-2
TERMINAL,PG SPR SPD 16-14 10

TE Part #61944-2
250 FASTON REC 18-14 AWG TPBR

TE Part #4-2378158-2
Power Versa-Lock CAP, 1X2 KEY D

TE Part #2329908-1
Power Versa-Lock SEAL TAB, 18-20
AWG

Documents

Product Drawings
Power Versa-Lock REAR SEAL, 1X1, LargeID
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_2325349-1_A.2d_dxf.zip



English

Customer View Model

ENG_CVM_CVM_2325349-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2325349-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Engineering Report

English