

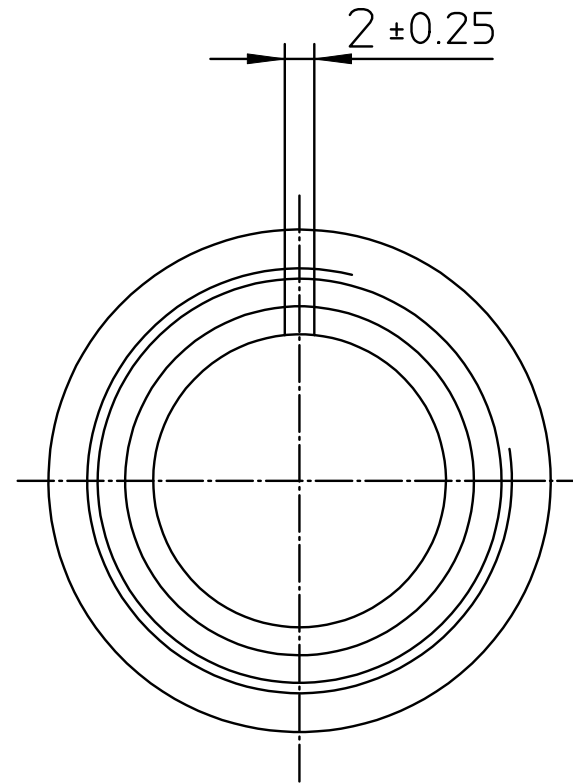


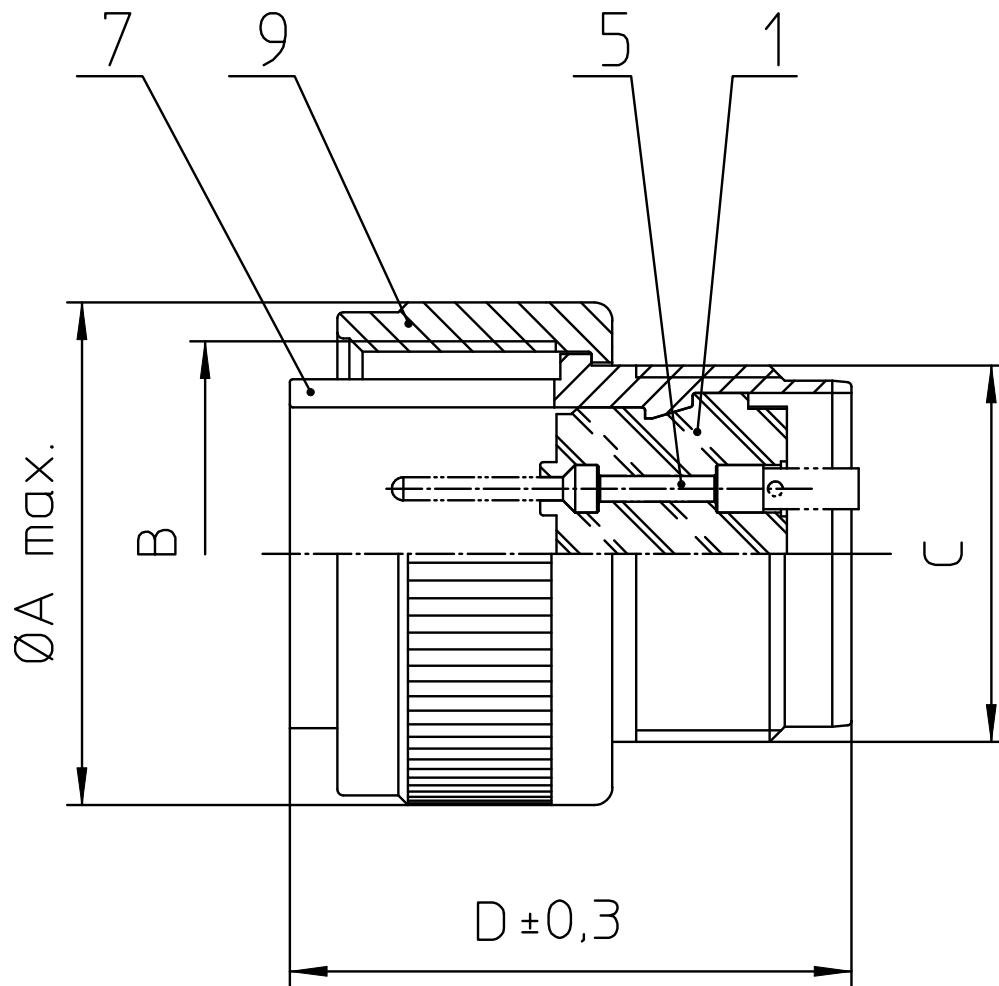

NO.	MASSE / DIMENSION
A	50.2
B	1 3/4-18UNS-2B
C	1 5/8-18NEF-2A
D	39.3

NO.	BESCHREIBUNG / DESCRIPTION
1	ISOLIERKÖRPER STIFT / INSULATOR PIN
5	KONTAKTSTIFT / CONTACT PIN
7	ZYLINDERGHÄUSE / BARREL
9	ÜBERWURFMUTTER / COUPLING NUT



Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change
Drawings illustrate normal insulator positioning

Material Specification:	
Shell Material:	Aluminium alloy
Shell Plating:	Olive drab chromate coating over cadmium plating
Insulator Material:	Neoprene
Contact Material:	Copper alloy
Contact Plating:	Hard silver

all dimensions are in mm Dimensions without tolerance indications are general tolerances in acc. with DIN7168m		drawing for CUSTOMER	
 ITT <i>Engineered for life</i> ITT CANNON GmbH D - 71384 Weinstadt/Germany	description CA3106E28-12P-F80-F42 Plug, straight without Endbell and grommet AWG Crimp / Pin / Layout: 28-12		
	© All rights reserved. Reproduction or issue to third in any form whenever is only permitted with written authorization of ITT Cannon		
 		page 1/1	revision 753 1. Apr 18