




Resistor LED for 12 V Supply Voltage

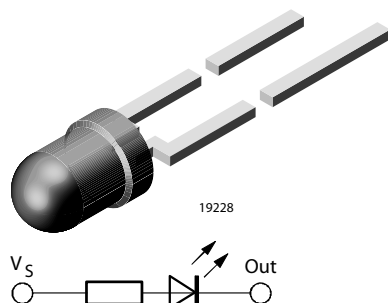

DESCRIPTION

These devices are developed for the automotive industry and other industries which use 12 V sources. The TLR.440.CU series contains an integrated resistor for current limiting in series with the LED chip. This allows the lamp to be driven from a 12 V source without an external current limiter.

Available colors are red, soft orange, yellow, green and pure green. The luminous intensity of such an LED is measured at constant voltage of 12 V.

These tinted diffused lamps provide a wide off-axis viewing angle.

These LEDs are intended for space critical applications such as automobile instrument panels, switches and others which are driven from a 12 V source.

FEATURES

- With current limiting resistor for 12 V
- Cost effective: save space and resistor cost
- Standard $\varnothing$ 3 mm (T-1) package
- Wide viewing angle
- Choice of five bright colors
- Luminous intensity categorized
- Yellow and green color categorized
- Luminous intensity and color are measured at 12 V
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC



APPLICATIONS

- Status light in cars and other applications with a 12 V source
- Off/on indicator in cars and other applications with a 12 V source
- Background illumination for switches
- Off/on indicator in switches

PRODUCT GROUP AND PACKAGE DATA

- Product group: LED
- Package: 3 mm
- Product series: resistor
- Angle of half intensity: $\pm 30^\circ$

PARTS TABLE

PART	COLOR, LUMINOUS INTENSITY	TECHNOLOGY
TLRP4400CU	Pure green, $I_V > 0.63$ mcd	GaP on GaP
TLRP4406CU	Pure green, $I_V = (1.6 \text{ to } 5)$ mcd	GaP on GaP
TLRH4400CU	Red, $I_V > 1.6$ mcd	GaAsP on GaP
TLRO4400CU	Soft orange, $I_V > 4$ mcd	GaAsP on GaP
TLRY4400CU	Yellow, $I_V > 1.6$ mcd	GaAsP on GaP
TLRG4400CU	Green, $I_V > 1.6$ mcd	GaP on GaP

** Please see document "Vishay Material Category Policy": www.vishay.com/doc?99902

ABSOLUTE MAXIMUM RATINGS ¹⁾ TLRH4400CU, TLR04400CU, TLRy4400CU, TLRG4400CU, TLRP4400CU

PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT
Reverse voltage		V_R	6	V
Forward voltage	$T_{amb} \leq 65^\circ\text{C}$	V_F	16	V
Power dissipation		P_V	240	mW
Junction temperature		T_j	100	$^\circ\text{C}$
Operating temperature range		T_{amb}	- 40 to + 100	$^\circ\text{C}$
Storage temperature range		T_{stg}	- 55 to + 100	$^\circ\text{C}$
Soldering temperature	$t \leq 5 \text{ s}$, 2 mm from body	T_{sd}	260	$^\circ\text{C}$
Thermal resistance junction/ambient		R_{thJA}	150	K/W

Note:

¹⁾ $T_{amb} = 25^\circ\text{C}$ unless otherwise specified**OPTICAL AND ELECTRICAL CHARACTERISTICS ¹⁾ TLRH4400CU, RED**

PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Luminous intensity ²⁾	$V_S = 12 \text{ V}$	I_V	1.6	10		mcd
Dominant wavelength	$V_S = 12 \text{ V}$	λ_d	612		625	nm
Peak wavelength	$V_S = 12 \text{ V}$	λ_p		635		nm
Angle of half intensity	$V_S = 12 \text{ V}$	φ		± 30		deg
Forward current	$V_S = 12 \text{ V}$	I_F		10	12	mA
Breakdown voltage	$I_R = 10 \mu\text{A}$	V_{BR}	6	20		V
Junction capacitance	$V_R = 0$, $f = 1 \text{ MHz}$	C_j		50		pF

Note:

¹⁾ $T_{amb} = 25^\circ\text{C}$ unless otherwise specified²⁾ In one packing unit $I_{Vmin}/I_{Vmax} \leq 0.5$ **OPTICAL AND ELECTRICAL CHARACTERISTICS ¹⁾ TLRO4400CU, SOFT ORANGE**

PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Luminous intensity ²⁾	$V_S = 12 \text{ V}$	I_V	4	10		mcd
Dominant wavelength	$V_S = 12 \text{ V}$	λ_d	598		611	nm
Peak wavelength	$V_S = 12 \text{ V}$	λ_p		605		nm
Angle of half intensity	$V_S = 12 \text{ V}$	φ		± 30		deg
Forward current	$V_S = 12 \text{ V}$	I_F		10	12	mA
Breakdown voltage	$I_R = 10 \mu\text{A}$	V_{BR}	6	20		V
Junction capacitance	$V_R = 0$, $f = 1 \text{ MHz}$	C_j		50		pF

Note:

¹⁾ $T_{amb} = 25^\circ\text{C}$ unless otherwise specified²⁾ In one packing unit $I_{Vmin}/I_{Vmax} \leq 0.5$


OPTICAL AND ELECTRICAL CHARACTERISTICS ¹⁾, TLRy4400CU, YELLOW

PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Luminous intensity ²⁾	$V_S = 12\text{ V}$	I_V	1.6	10		mcd
Dominant wavelength	$V_S = 12\text{ V}$	λ_d	581		594	nm
Peak wavelength	$V_S = 12\text{ V}$	λ_p		585		nm
Angle of half intensity	$V_S = 12\text{ V}$	φ		± 30		deg
Forward current	$V_S = 12\text{ V}$	I_F		10	12	mA
Breakdown voltage	$I_R = 10\text{ }\mu\text{A}$	V_{BR}	6	20		V
Junction capacitance	$V_R = 0, f = 1\text{ MHz}$	C_j		50		pF

Note:

¹⁾ $T_{amb} = 25\text{ }^\circ\text{C}$ unless otherwise specified

²⁾ In one packing unit $I_{Vmin.}/I_{Vmax.} \leq 0.5$
OPTICAL AND ELECTRICAL CHARACTERISTICS ¹⁾, TLRG4400CU, GREEN

PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Luminous intensity ²⁾	$V_S = 12\text{ V}$	I_V	1.6	10		mcd
Dominant wavelength	$V_S = 12\text{ V}$	λ_d	562		575	nm
Peak wavelength	$V_S = 12\text{ V}$	λ_p		565		nm
Angle of half intensity	$V_S = 12\text{ V}$	φ		± 30		deg
Forward current	$V_S = 12\text{ V}$	I_F		10	12	mA
Breakdown voltage	$I_R = 10\text{ }\mu\text{A}$	V_{BR}	6	20		V
Junction capacitance	$V_R = 0, f = 1\text{ MHz}$	C_j		50		pF

Note:

¹⁾ $T_{amb} = 25\text{ }^\circ\text{C}$ unless otherwise specified

²⁾ In one packing unit $I_{Vmin.}/I_{Vmax.} \leq 0.5$
OPTICAL AND ELECTRICAL CHARACTERISTICS ¹⁾, TLRP440.CU, PURE GREEN

PARAMETER	TEST CONDITION	PART	SYMBOL	MIN.	TYP.	MAX.	UNIT
Luminous intensity ²⁾	$V_S = 12\text{ V}$	TLRP4400CU	I_V	0.63	3		mcd
		TLRP4406CU	I_V	1.6		5	mcd
Dominant wavelength	$V_S = 12\text{ V}$		λ_d	555		565	nm
Peak wavelength	$V_S = 12\text{ V}$		λ_p		555		nm
Angle of half intensity	$V_S = 12\text{ V}$		φ		± 30		deg
Forward current	$V_S = 12\text{ V}$		I_F		10	12	mA
Breakdown voltage	$I_R = 10\text{ }\mu\text{A}$		V_{BR}	6	20		V
Junction capacitance	$V_R = 0, f = 1\text{ MHz}$		C_j		50		pF

Note:

¹⁾ $T_{amb} = 25\text{ }^\circ\text{C}$ unless otherwise specified

²⁾ In one packing unit $I_{Vmin.}/I_{Vmax.} \leq 0.5$

TYPICAL CHARACTERISTICS

$T_{amb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified

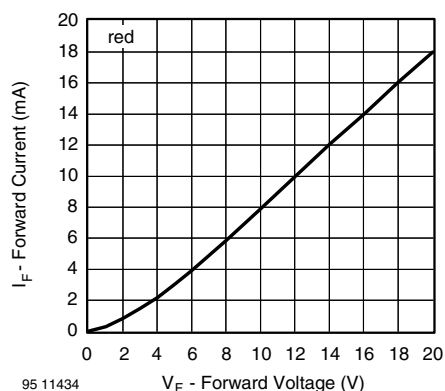


Figure 1. Forward Current vs. Forward Voltage

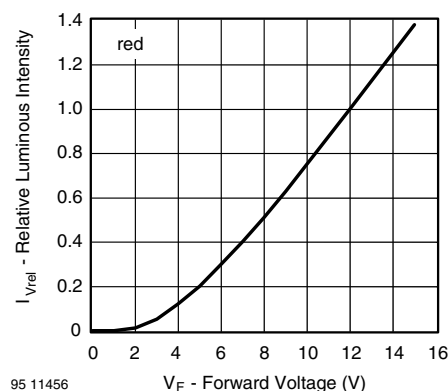


Figure 4. Relative Luminous Intensity vs. Forward Voltage

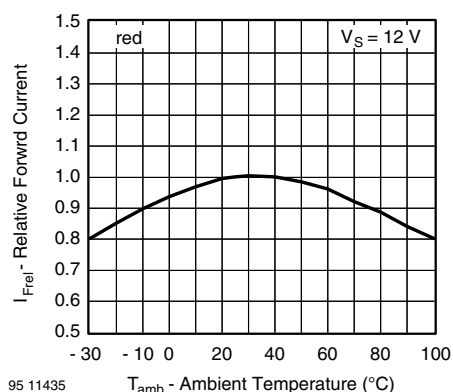


Figure 2. Relative Forward Current vs. Ambient Temperature

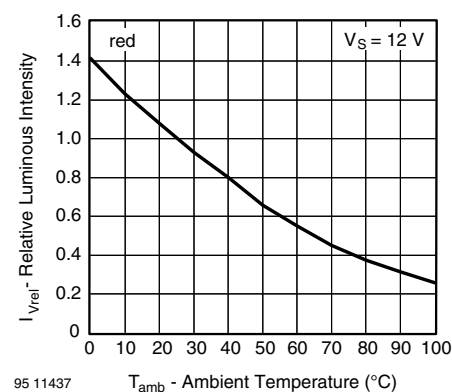


Figure 5. Rel. Luminous Intensity vs. Ambient Temperature

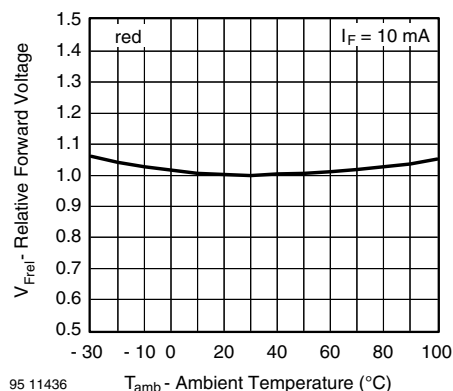


Figure 3. Relative Forward Voltage vs. Ambient Temperature

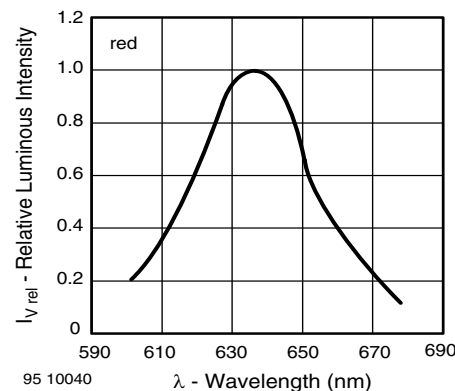


Figure 6. Relative Intensity vs. Wavelength

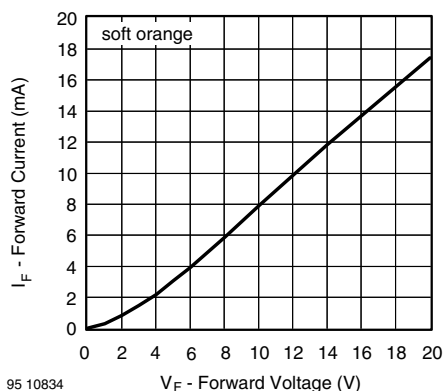


Figure 7. Forward Current vs. Forward Voltage

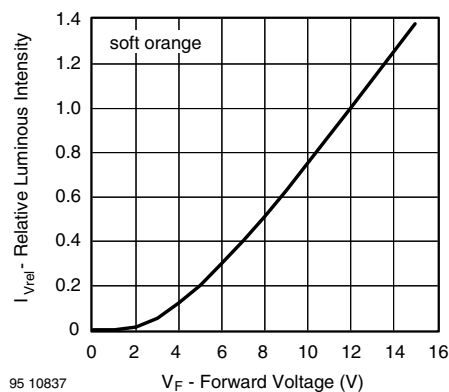


Figure 10. Relative Luminous Intensity vs. Forward Voltage

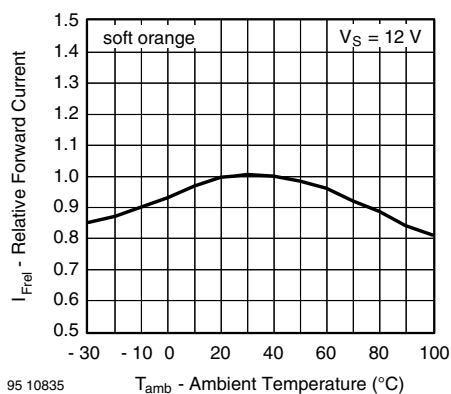


Figure 8. Relative Forward Current vs. Ambient Temperature

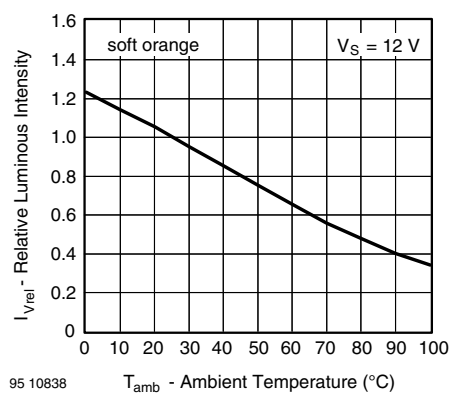


Figure 11. Rel. Luminous Intensity vs. Ambient Temperature

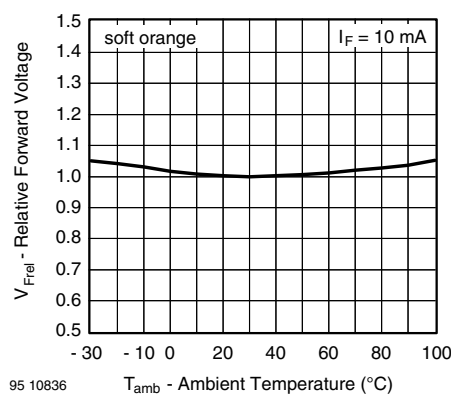


Figure 9. Relative Forward Voltage vs. Ambient Temperature

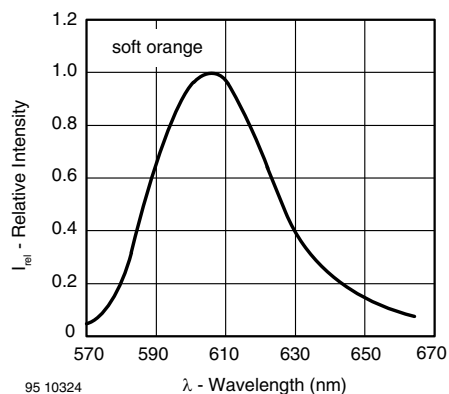


Figure 12. Relative Intensity vs. Wavelength

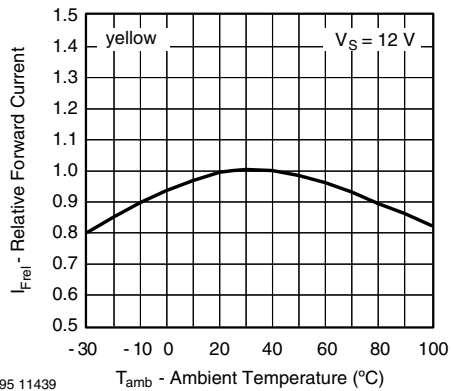


Figure 13. Relative Forward Current vs. Ambient Temperature

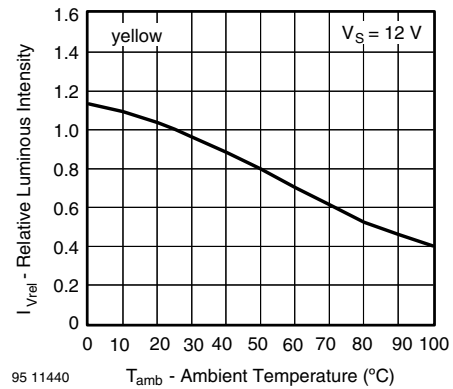


Figure 16. Rel. Luminous Intensity vs. Ambient Temperature

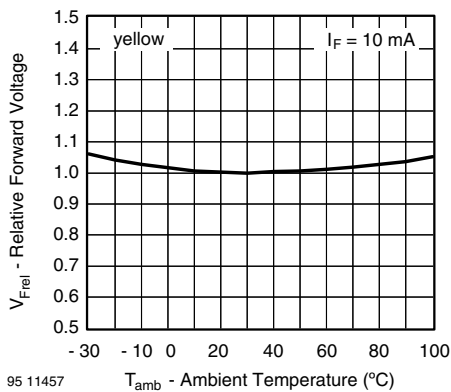


Figure 14. Relative Forward Voltage vs. Ambient Temperature

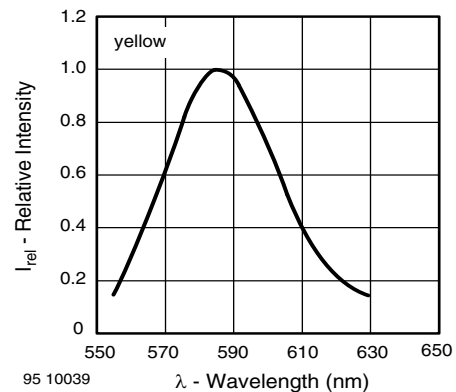


Figure 17. Relative Intensity vs. Wavelength

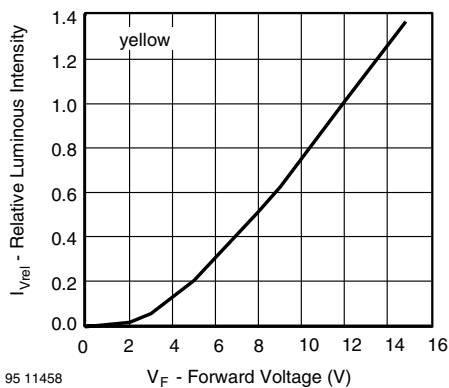


Figure 15. Relative Luminous Intensity vs. Forward Voltage

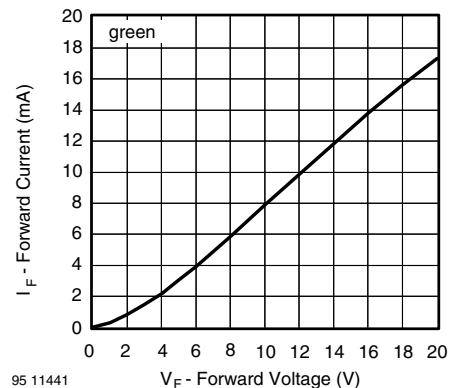


Figure 18. Forward Current vs. Forward Voltage

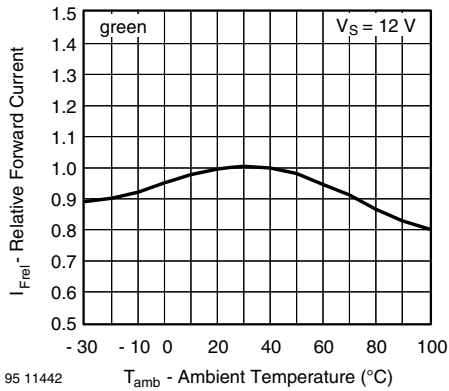


Figure 19. Relative Forward Current vs. Ambient Temperature

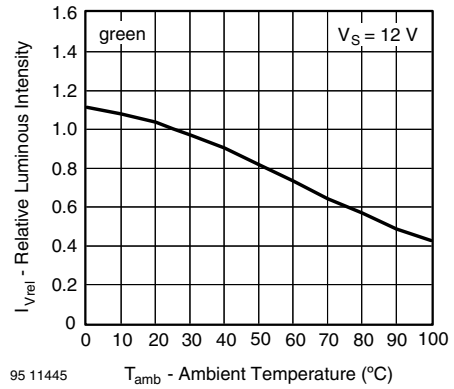


Figure 22. Rel. Luminous Intensity vs. Ambient Temperature

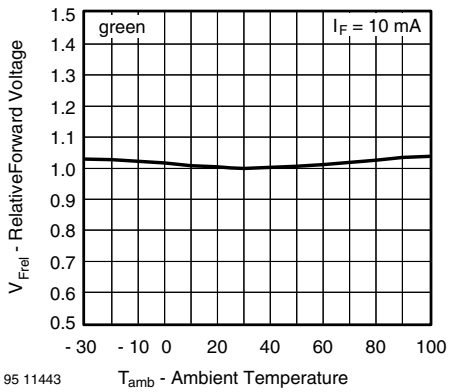


Figure 20. Relative Forward Voltage vs. Ambient Temperature

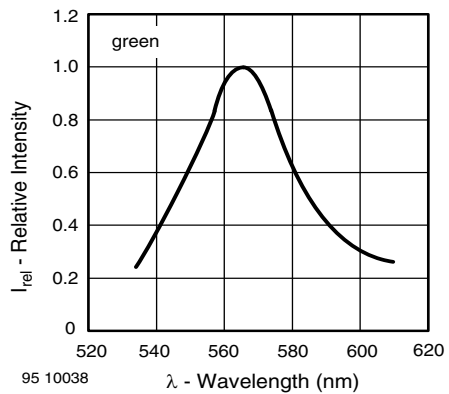


Figure 23. Relative Intensity vs. Wavelength

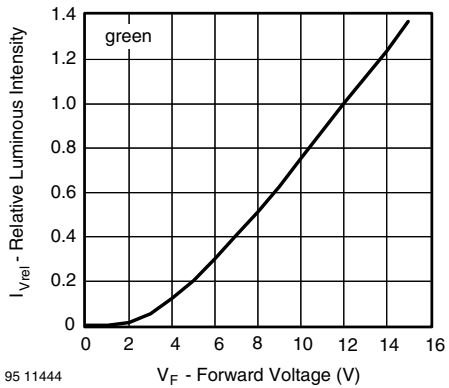


Figure 21. Relative Luminous Intensity vs. Forward Voltage

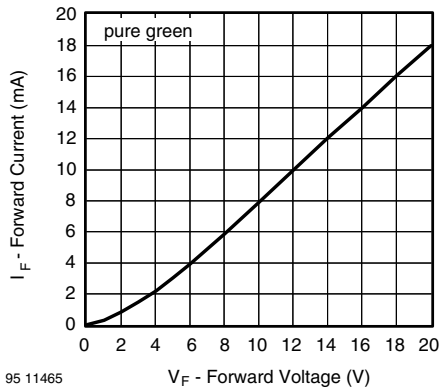


Figure 24. Forward Current vs. Forward Voltage

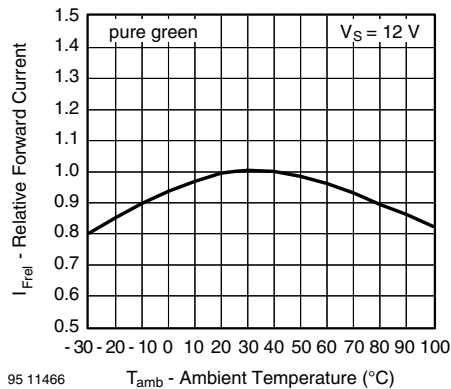


Figure 25. Relative Forward Current vs. Ambient Temperature

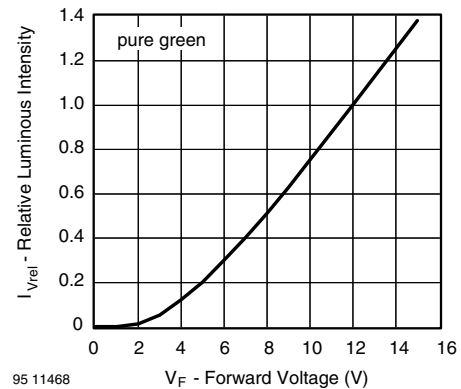


Figure 27. Relative Luminous Intensity vs. Forward Voltage

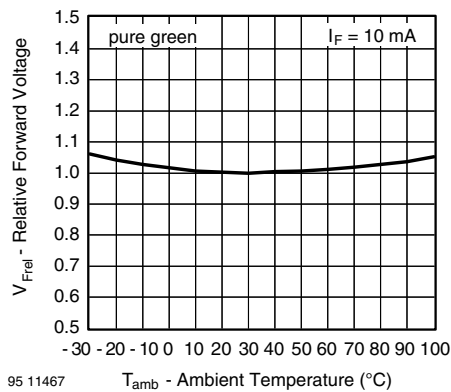


Figure 26. Relative Forward Voltage vs. Ambient Temperature




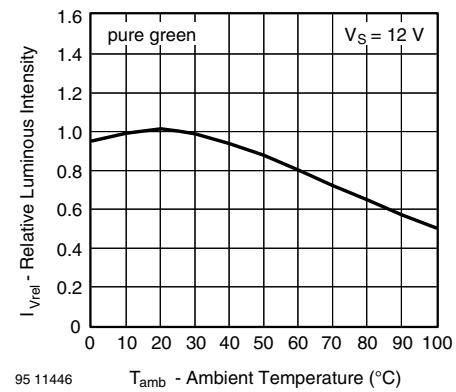


Figure 28. Rel. Luminous Intensity vs. Ambient Temperature

PACKAGE DIMENSIONS in millimeters

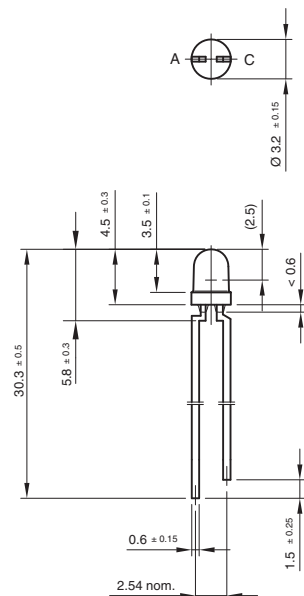

Drawing-No.: 6.544-5255.01-4
Issue: 7; 25.09.08
95 10913

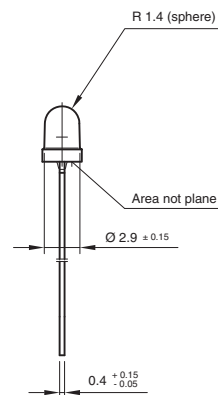

technical drawings
according to DIN
specifications



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.