



Fittings with swivel flange

- **HGL-SFL Straight Swivel Flange, IP68**

Straight swivel flange with conduit seal and washer.

Fulfils IP66, IP67, IP68 and IP69k.


Features and Benefits

- One piece, fast fit
- High pull-off strength
- Highly resistant to solvents and oils
- Free of halogen, sulphur and phosphorus



HelaGuard HGL-SFL Straight Swivel Flange with conduit seal, IP68.

MATERIAL	Polyamide 6.6 (PA66), Thermoplastic Elastomer (TPE)
Operating Temperature	-50 °C to +135 °C
Flammability	UL94 V2
Specifications	UL-Recognised

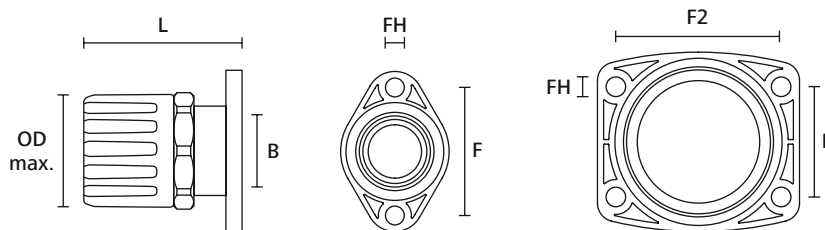

HelaGuard fitting, straight swivel flange

TYPE	Nominal Ø	Min. Bore Size (B)	Outside Ø max (OD max.)	Length (L)	Hole Ø (FH)	Fixing Hole Centres (F)	Fixing Hole Centres (F2)	Pack Cont.	Colour	Article-No.
HGL16-SFL	16	14.5	29	41	5.2	36	-	10 pcs.	Black (BK)	166-21800
HGL21-SFL	21	14.5	34	44	5.2	36	-	10 pcs.	Black (BK)	166-21801
HGL28-SFL	28	19.5	44	49	6.2	53	-	10 pcs.	Black (BK)	166-21802
HGL34-SFL	34	26.5	51	55	6.2	36	54	10 pcs.	Black (BK)	166-21803
HGL42-SFL	42	42.0	63	63	6.2	36	54	2 pcs.	Black (BK)	166-21804

All dimensions in mm. Subject to technical changes.

Colour grey available on request. Minimum Order Quantity (MOQ) may differ from package content.



Please note! Not all products listed on this page may have this approval.