


Three Phase Bridge Rectifier



Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Ideal for printed circuit boards

Mechanical Data

Case	: Epoxy case with heat sink laterally mounted in the bridge encapsulation
Terminals	: Plated leads solderable per MIL-STD-202, Method 208
Polarity	: As Marked on Body
Mounting Position	: Bolt down on heatsink with silicone thermal compound between bridge and mounting surface for maximum heat transfer efficiency.
Mounting Torque	: 2 N.m

Maximum Ratings And Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Voltage Ratings					Unit
Characteristics	Symbol	SBR2508W	SBR2510W	SBR2512W	
Peak Repetitive Voltage	V_{RRM}	800	1000	1200	V
Working Peak Reverse Voltage	V_{RWM}				
DC Blocking Voltage	V_R				
Peak Non-Repetitive Reverse Voltage	V_{RSM}	900	1100	1300	
RMS Reverse Voltage	$V_{R(RMS)}$	560	700	840	
Forward Conduction					
Characteristics	Symbol	SBR25W Series			Unit
Maximum Average Forward Rectified Current @Tc = 55°C	Io	25			A
Peak Forward Surge Current t=8.3ms at 60Hz	IFSM	430			
I²t Rating for fusing	I²t	767			A²S
Maximum Forward Voltage drop per element at 12.5A Peak	VF	1.1			V
Reverse peak current VR=VRRM@TJ=25°C VR=VRRM@TJ=125°C	IR	5 3			µA mA
RMS Isolation Voltage from Case to Lead	VISO	2500			V
Thermal Characteristics					
Operating Temperature Range	TJ	-55 to +150			°C
Storage Temperature Range	TSTG				

Three Phase Bridge Rectifier

Rating and Characteristic Curves

FIG.1-MAXIMUM FORWARD SURGE CURRENT

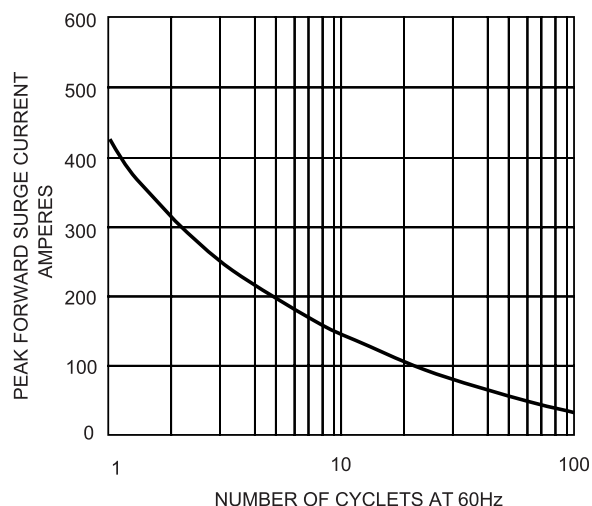


FIG.2- DERATING CURVE OUTPUT RECTIFIED CURRENT

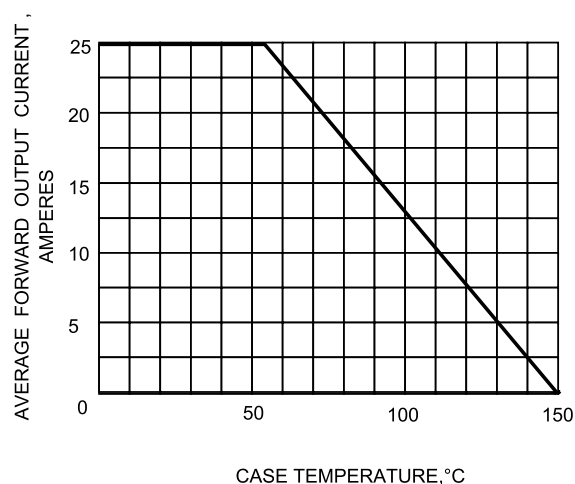


FIG.3-TYPICAL FORWARD CHARACTERISTICS



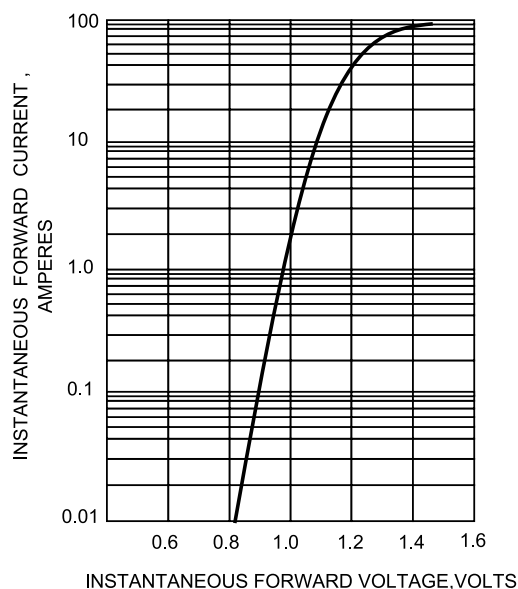


FIG.4-TYPICAL REVERSE CHARACTERISTICS

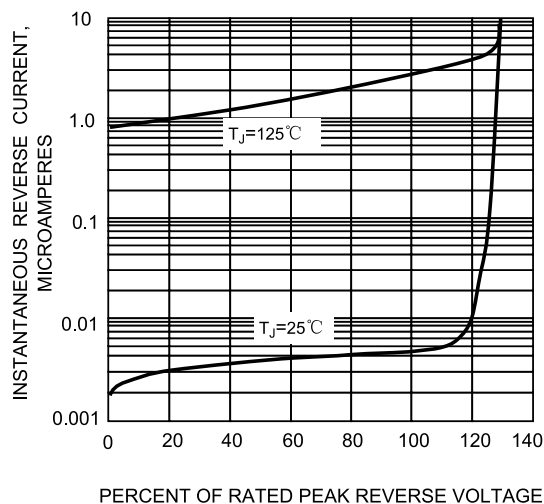

Three Phase Bridge Rectifier

Dimension:

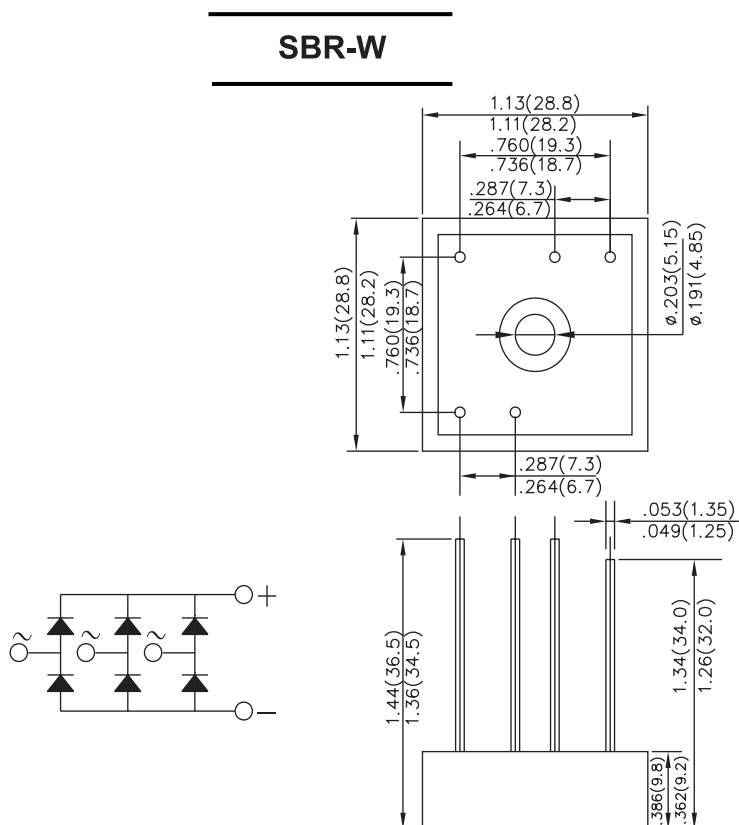

Dimensions : Inches (Millimetres)

Part Number Table

Description	Part Number
Three Phase Bridge 25A 800V Wire Leads SBRW Package	SBR2508W
Three Phase Bridge 25A 1000V Wire Leads SBRW Package	SBR2510W
Three Phase Bridge 25A 1200V Wire Leads SBRW Package	SBR2512W

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell Limited 2016.