


REV.	CHANGE	DATE	APPD.
A	.400 MAX WAS .374 MAX -ECO 10560	11.4.96	

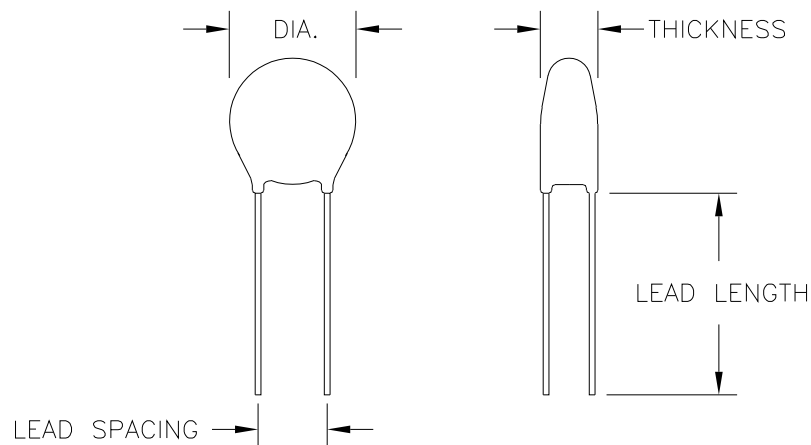

PARAMETER	SYMBOL	SPEC
RESISTANCE AT 25°C	R_0	10 OHMS $\pm 20\%$
MAX STEADY STATE CURRENT	I_{MAX}	3 AMPS
RESISTANCE AT I_{MAX}	R_{IMAX}	.4 OHMS
DIAMETER		.400 MAX
THICKNESS		.204 MAX
LEAD DIAMETER		.032 NOM
LEAD LENGTH		1.0 MIN
LEAD SPACING		.310 NOM
COATING MATERIAL		SILICONE RESIN

TOLERANCES UNLESS OTHERWISE NOTED, ALL DIMENSIONS ARE IN INCHES, AND TOLERANCES ARE AS SHOWN HERE. FRACTIONS = $\pm 1/64$ DECIMALS .XX = .01 .XXX = .005 ANGLES = 0°30'		DRAWN	DATE	FENWAL ELECTRONICS, INC. 450 FORTUNE BOULEVARD, MILFORD, MASSACHUSETTS 01757 U.S.A. TELEPHONE (508) 478 - 6000 FAX (508) 473 - 6035			
		HS	2NOV95				
		CHECKED	DATE	TITLE ICL THERMISTOR OUTLINE			
AP	11/2/95						
APPROVED	DATE						
DL	11/2/95						
USED ON		This information is the property of FENWAL ELECTRONICS, INC. It is submitted in confidence, and is not to be disclosed or utilized without written permission.					
SHEET	OF	DO NOT SCALE DRAWING		SCALE	SIZE	DRAWING NUMBER	REV.
1	1			--	A	ICL1010003-01	A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[ICL1010003-01](#)