



2 W Conductive Plastic  
Potentiometers  
**380 Series, RV4 Series, 485 Series,  
53C Series, 385 Series**



# Conductive Plastic Potentiometers

Potentiometers convert rotary motion into a change of resistance, supplying a smooth transition of voltage or current levels. The resulting voltage output may be used to control position transducers in a wide variety of potential applications.

The five series listed below are all 2 W plastic potentiometers and are available in resistances from 100 Ohm to 5 MOhm, inclusive. Available tapers include linear, log, and antilog to meet a wide range of application requirements. These single turn devices have a 6,35 mm [0.250 in] diameter shaft that is available in a range of lengths. Most shafts are nickel-plated brass. Most configurations have a standard 3/8-32 NEF-2A bushing; a high torque version is also available. Termination types are solder lug (with or without a center tap), PC pin or fast-on, all are solder-dipped. Custom designs are available upon request.

- **380 Series:** 2 W conductive plastic potentiometer offering low contact resistance variation and a long rotational life
- **RV4 Series:** Military version of the 380 Series; meets MIL-R-94 requirements (non RoHS compliant)
- **485 Series:** Custom version of the 380 Series
- **53C Series:** Cost-effective version of the 380 Series
- **385 Series:** Custom version of the 53C Series

## Table of Contents

|                                       |           |
|---------------------------------------|-----------|
| General Specifications . . . . .      | 3-6       |
| General Configuration Guide . . . . . | 7         |
| 380 Series:                           |           |
| Specific Configurations . . . . .     | 8         |
| Order Guides . . . . .                | 9-15      |
| RV4 Series:                           |           |
| Specific Configurations . . . . .     | 16        |
| Order Guides . . . . .                | 17-18     |
| 485 Series:                           |           |
| Specific Configurations . . . . .     | 19-21     |
| Order Guides . . . . .                | 22-31     |
| 53C Series:                           |           |
| Specific Configurations . . . . .     | 32        |
| Order Guides . . . . .                | 33-37     |
| 385 Series:                           |           |
| Specific Configurations . . . . .     | 38-39     |
| Order Guides . . . . .                | 40-46     |
| Additional Information. . . . .       | back page |

## Key Features and Benefits

- **Cost-effective:** Supplies good performance at a reasonable price
- **Wide range of resistance values (100 Ohm to 5 MOhm, inclusive):** Promotes flexibility in the applications
- **Wide variety of tapers:** Creates flexibility in output signal profile, allowing use in a wide variety of applications

## Potential Applications

### INDUSTRIAL/COMMERCIAL

- Audio and visual equipment (e.g., musical instruments, sound mixers, projectors, amplifiers)
- Foot pedal controls (e.g., guitars, sewing machines, woodworking equipment)
- Machine controls (e.g., joysticks)
- Welding equipment (e.g., MIG wire feed, foot pedal controls, adjustment knobs)

### TRANSPORTATION

- Foot pedal controls (e.g., golf carts)
- Gear shifter, joystick, and throttle position (e.g., construction/agricultural vehicles)

# General Specifications

**Table 1. Electrical Specifications**

| Characteristic                                                       | 380 Series                                                                   | RV4 Series | 485 Series | 53C Series | 385 Series |
|----------------------------------------------------------------------|------------------------------------------------------------------------------|------------|------------|------------|------------|
| Maximum working voltage:<br>linear tapers<br>log, reverse log tapers | 500 Vdc<br>350 Vdc                                                           |            |            |            |            |
| Dielectric strength                                                  | 1000 Vac for 60 s at 1 mPa [atm], 450 Vac for 60 s at 11,5 kPa [3.4 inHg]    |            |            |            |            |
| Power rating                                                         | 2 W at 70 °C [158 °F], derated to 120 °C [248 °F]                            |            |            |            |            |
| Taper                                                                | See Order Guides under each series                                           |            |            |            |            |
| CRV <sup>1</sup> :<br>linear tapers<br>log, reverse log tapers       | 3% max. total resistance<br>3% max. total resistance                         |            |            |            |            |
| Resistance                                                           | 100 Ohm to 5 MOhm, inclusive. See individual Order Guides under each series. |            |            |            |            |
| Resistance tolerance                                                 | See Order Guides under each series.                                          |            |            |            |            |
| End resistance                                                       | See Order Guides under each series.                                          |            |            |            |            |
| Linearity                                                            | ±5%                                                                          |            |            |            |            |
| Electrical rotation                                                  | See Order Guides under each series.                                          |            |            |            |            |

<sup>1</sup>Contact resistance variation is the maximum momentary change in contact resistance that occurs when the wiper is moved from one location to another location. The larger this change, the more difficult it is to set the trimmer potentiometer and the more unstable the long term setting will be.

**Table 2. Mechanical Specifications**

| Characteristic                                                                     | 380 Series                                                                                                        | RV4 Series                                          | 485 Series                           | 53C Series                                       | 385 Series |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|--------------------------------------|--------------------------------------------------|------------|
| Shaft:<br>material<br>diameter                                                     | nickel-plated brass <sup>1</sup><br>6,35 mm [0.250 in]                                                            |                                                     |                                      |                                                  |            |
| Retaining ring<br>material                                                         | nickel-plated brass                                                                                               |                                                     | nickel-plated<br>beryllium copper    | nickel-plated brass                              |            |
| Bushing:<br>material<br>thread                                                     | nickel-plated brass<br>3/8-32 NEF-2A                                                                              |                                                     |                                      |                                                  |            |
| Termination base<br>material                                                       | thermoset                                                                                                         |                                                     |                                      |                                                  |            |
| Terminal material                                                                  | brass; solder<br>(SAC305) dip finish                                                                              | brass; solder<br>(SAC305) dip or<br>tin-lead finish | brass; solder<br>(SAC305) dip finish | brass; solder (SAC305) dip or<br>tin-lead finish |            |
| Housing material                                                                   | stainless steel                                                                                                   |                                                     |                                      |                                                  |            |
| Base material                                                                      | thermoset plastic                                                                                                 |                                                     |                                      |                                                  |            |
| Mounting<br>hardware material:<br>jam nut<br>mounting nut<br>lock washer<br>o-ring | nickel-plated brass<br>nickel-plated brass<br>nickel-plated brass phospher bronze <sup>1</sup><br>silicone rubber |                                                     |                                      |                                                  |            |
| Operating torque                                                                   | See Order Guides under each series.                                                                               |                                                     |                                      |                                                  |            |
| Stop torque                                                                        | See Order Guides under each series.                                                                               |                                                     |                                      |                                                  |            |
| Weight (approx.)                                                                   | 32.7 g [0.072 lb]                                                                                                 |                                                     |                                      |                                                  |            |

<sup>1</sup>Unless otherwise specified on the Order Guides under each series.

# General Specifications


Table 3. Environmental Specifications

| Characteristic        | 380 Series                          | RV4 Series | 485 Series | 53C Series | 385 Series |
|-----------------------|-------------------------------------|------------|------------|------------|------------|
| Operating temperature | -55 °C to 120 °C [-67 °F to 248 °F] |            |            |            |            |
| Rotational life       | tested to 25,000 cycles             |            |            |            |            |

Table 4. Maximum Percent Temporary Resistance from 25 °C [77 °F]

| Nominal Resistance | Temperature     |                 |              |               |                |                |                 |
|--------------------|-----------------|-----------------|--------------|---------------|----------------|----------------|-----------------|
|                    | -55 °C [-67 °F] | -40 °C [-40 °F] | 0 °C [32 °F] | 25 °C [77 °F] | 55 °C [131 °F] | 85 °C [185 °F] | 120 °C [248 °F] |
| 100 Ohm            | ±5.0            | ±4.0            | ±1.5         | 0             | ±1.5           | ±2.0           | ±3.5            |
| 10 kOhm            | +7.0            | +5.5            | +2.0         | 0             | ±1.5           | ±2.5           | ±5.5            |
| 100 kOhm           | +8.0            | +6.0            | +2.5         | 0             | ±2.0           | ±3.5           | ±6.0            |
| 1 MOhm             | +10.0           | +8.0            | +3.0         | 0             | ±2.5           | ±4.0           | ±7.5            |


Figure 1. Electrical Taper Diagrams (For reference only.)

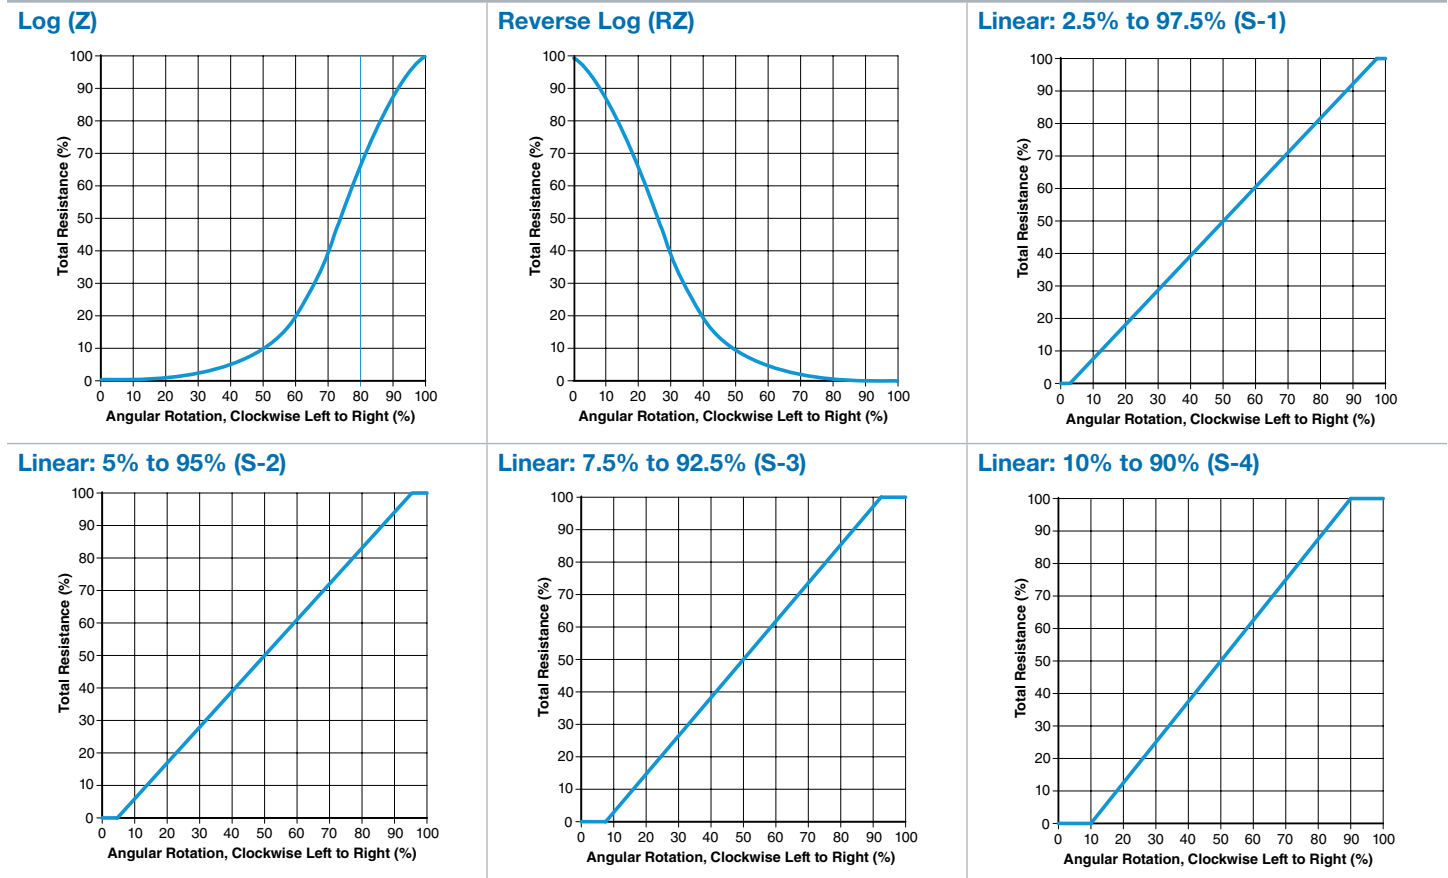


# General Specifications

Figure 1. Electrical Taper Diagrams (continued)


**Linear: 15% to 95% (S-5)**

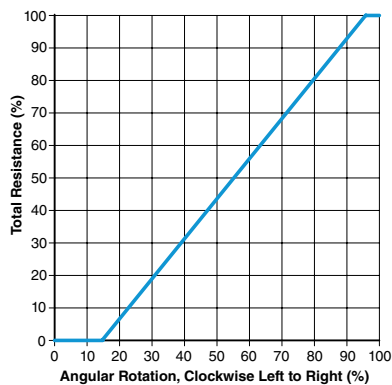


**Linear: 25% to 75% (S-6)**

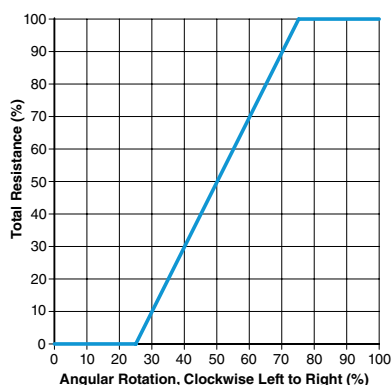


**Linear: 35% to 65% (S-7)**

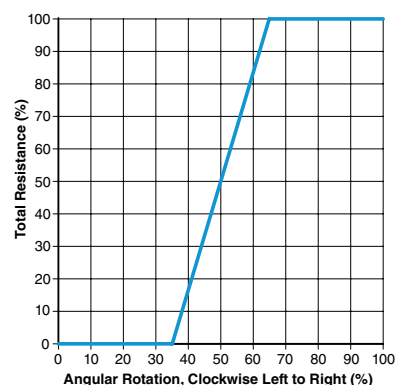


**Linear: 37.5% to 82.5% (S-8)**

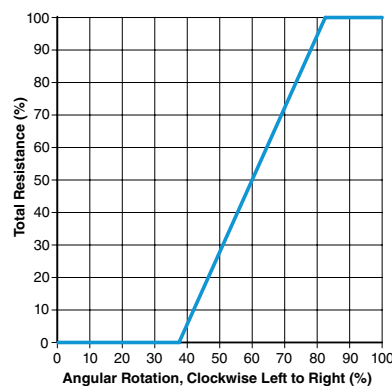


**Linear: 42.5% to 57.5% (S-9)**

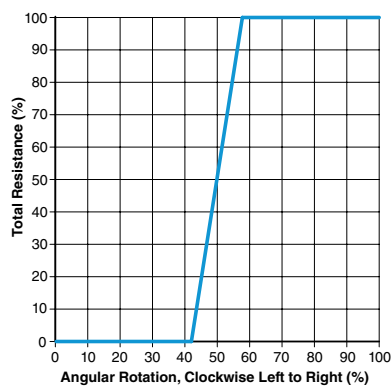


**Linear: 45% to 55% (S-10)**

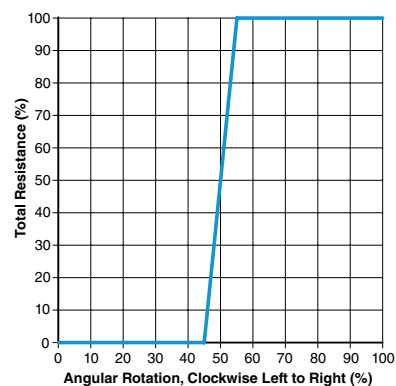


**Linear: 5% to 50%; 50% to 90% (S-11)**

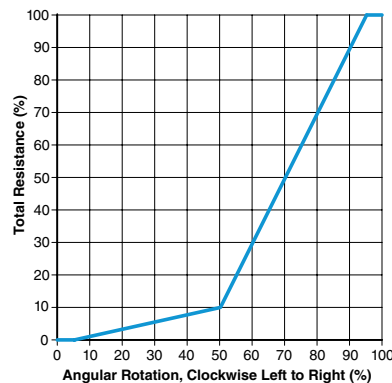


**Linear: 10% to 40%; 57.5% to 82.5% (S-12)**

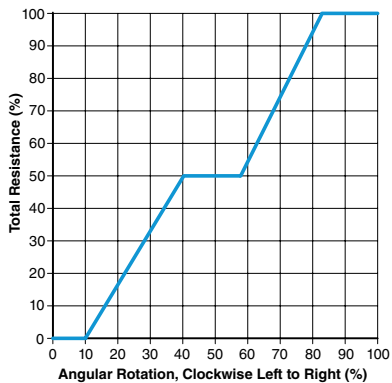


**Linear: 10% to 45%; 55% to 90% (S-13)**

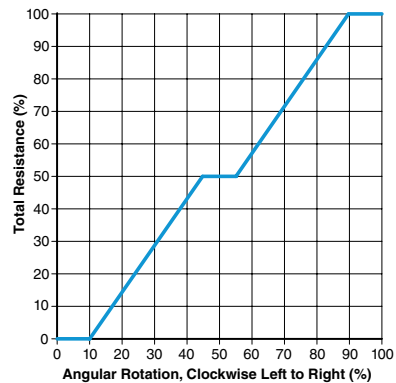


**Linear: 35% to 45%; 55% to 65% (S-14)**

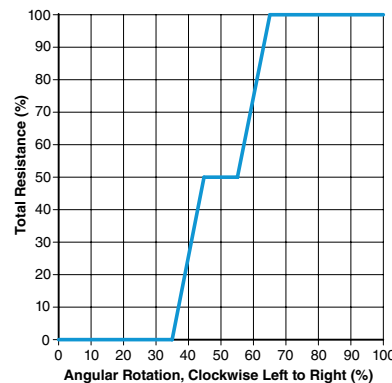

**Linear: 45% to 47.5%; 47.5% to 52.5%; 52.5% to 55% (S-15)**

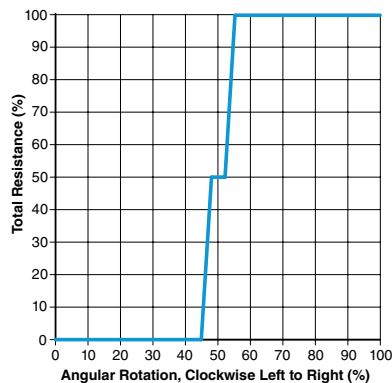

**Linear: 5% to 40%; 45% to 52.5%; 60% to 95% (S-16)**

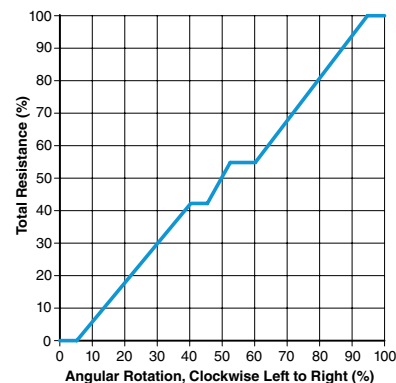

# General Specifications

Figure 2. Power Derating Curve

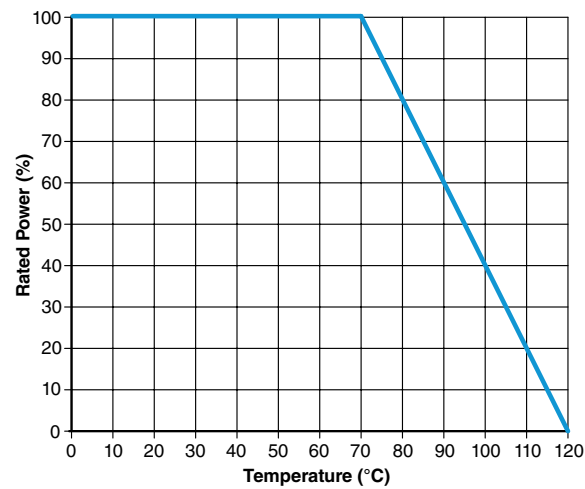







Figure 3. Mounting Hardware

|                                                                                    |                                                                                    |                                                                                       |                                                                                      |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Jam Nut</b><br>7,94 mm [5/16 in] across flats<br>3,97 mm [5/32 in] thick        | <b>Mounting Nut</b><br>1/4 x 32 thread<br>7,94 mm [5/16 in] across flats           | <b>Lock Washer</b><br>10,32 mm [5/16 in] outside<br>diameter 0,64 mm [0.025 in] thick | <b>O-Ring</b><br>6,35 mm [0.25 in] outside diameter<br>1,78 mm [0.070 in] thick      |
|  |  |    |  |

# General Configuration Guide

Figure 4. General Configuration Guide










This figure shows possible configurations. Not all combinations may be available, please contact Honeywell. See the Order Guides for each series on subsequent pages for currently available catalog listings.
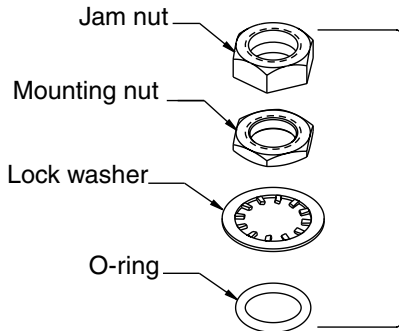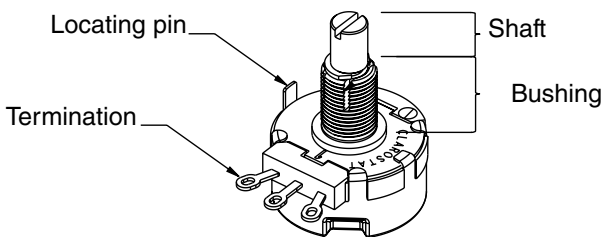
| Product Series                                                                                         | Bushing Type and Length                                                             | Switch | Shaft Type                   | Shaft Length                   | Resistance                                                                           |   | Electrical Taper                                                                                                                                                                                                                                                                                                                                                                                     | Anti-Rotation (AR) Locating Pin | Termination Type           |  |  |  |  |  |  |
|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|------------------------------|--------------------------------|--------------------------------------------------------------------------------------|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|----------------------------|--|--|--|--|--|--|
| 380 Series, RV4 Series, 485 Series, 53C Series, 385 Series<br>2 W<br>Conductive Plastic Potentiometers | 3/8-32 NEF-2A: Standard:<br>6,35 mm [0.25 in]                                       | None   | Ø3,18 mm [0.125 in]: Flatted | 9,53 mm [0.325"] <sup>1</sup>  | 10 Ohm                                                                               | 0 | Linear:<br>2.5% to 97.5%<br>5% to 95%<br>7.5% to 92.5%<br>10% to 90%<br>15% to 95%<br>25% to 75%<br>35% to 65%<br>37.5% to 82.5%<br>42.5% to 57.5%<br>45% to 55%<br>5% to 50%;<br>50% to 90%<br>10% to 40%;<br>57.5% to 82.5%<br>10% to 45%;<br>55% to 90%<br>10% to 45%;<br>55% to 90%<br>35% to 45%;<br>55% to 65%;<br>45% to 57.5%;<br>52.5% to 55%;<br>5% to 40%;<br>45% to 52.5%;<br>60% to 95% | No locating pins                | Solder lug                 |  |  |  |  |  |  |
|                                                                                                        |    |        |                              | 12,7 mm [0.50 in] <sup>1</sup> | 15 Ohm                                                                               | 1 |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |
|                                                                                                        |    |        |                              | 15,88 mm [0.625 in]            | 20 Ohm                                                                               | 2 |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |
|                                                                                                        | 7,92 mm [0.312 in]                                                                  |        | Round                        | 19,05 mm [0.75 in]             | 25 Ohm                                                                               | 3 |                                                                                                                                                                                                                                                                                                                                                                                                      | One locating pin:<br>9 o' clock | Solder lug with center tap |  |  |  |  |  |  |
|                                                                                                        |    |        |                              | 22,23 mm [0.875 in]            | 50 Ohm                                                                               | 4 |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |
|                                                                                                        | 8,69 mm [0.342 in]                                                                  |        | Slotted                      | 31,75 mm [1.25 in]             |                                                                                      | 5 |                                                                                                                                                                                                                                                                                                                                                                                                      | 3 o' clock                      | PC pin                     |  |  |  |  |  |  |
|                                                                                                        |   |        |                              | 50,8 mm [2.00 in]              | Custom                                                                               |   |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |
|                                                                                                        | 9,27 mm [0.365 in]                                                                  |        | Straight Knurled             | 63,5 mm [2.50 in]              | <sup>1</sup> Applies to 6,25 mm [0.25 in] bushings only.                             |   |                                                                                                                                                                                                                                                                                                                                                                                                      | Two locating pins               | Fast-on                    |  |  |  |  |  |  |
|                                                                                                        |  |        |                              | Custom                         |                                                                                      |   |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |
|                                                                                                        | 9,53 mm [0.375 in]                                                                  |        | Custom                       |                                |                                                                                      |   |                                                                                                                                                                                                                                                                                                                                                                                                      | Custom                          | Custom                     |  |  |  |  |  |  |
|                                                                                                        |  |        |                              |                                |                                                                                      |   |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |
|                                                                                                        | 12,7 mm [0.500 in]                                                                  |        |                              |                                |                                                                                      |   |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |
|                                                                                                        |  |        |                              |                                |                                                                                      |   |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |
|                                                                                                        | High Torque:<br>12,7 mm [0.500 in]                                                  |        |                              |                                |                                                                                      |   |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |
|                                                                                                        |  |        |                              |                                |                                                                                      |   |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |
|                                                                                                        | Custom                                                                              |        |                              |                                |                                                                                      |   |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |
| General 380 Series, RV4 Series, 485 Series, 53C Series, 385 Series Terminology                         |                                                                                     |        |                              |                                |                                                                                      |   |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |
|                                                                                                        |                                                                                     |        |                              |                                |   |   |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |
|                                                                                                        |                                                                                     |        |                              |                                | Jam nut<br>Mounting nut<br>Lock washer<br>O-ring<br>Mounting hardware                |   |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |
|                                                                                                        |                                                                                     |        |                              |                                |  |   |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |
|                                                                                                        |                                                                                     |        |                              |                                | Locating pin<br>Termination<br>Shaft<br>Bushing                                      |   |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |
|                                                                                                        |                                                                                     |        |                              |                                | Log<br>Reverse Log<br>Custom                                                         |   |                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                            |  |  |  |  |  |  |



# 380 Series Specific Configurations

Table 5. 380 Series Specific Configurations

| Shaft Type                               | Bushing Type                    | AR Pin | Termination | Configuration with Associated Hardware                                              | Shaft Type                               | Bushing Type                 | AR Pin | Termination | Configuration with Associated Hardware                                                |
|------------------------------------------|---------------------------------|--------|-------------|-------------------------------------------------------------------------------------|------------------------------------------|------------------------------|--------|-------------|---------------------------------------------------------------------------------------|
| <b>380-A (See Table 380-A on p. 9.)</b>  |                                 |        |             |                                                                                     | <b>380-B (See Table 380-B on p. 10.)</b> |                              |        |             |                                                                                       |
| flatted                                  | standard, 9,53 mm [0.375 in]    | 1      | solder lug  |    | slotted                                  | standard, 9,53 mm [0.375 in] | 2      | solder lug  |    |
| <b>380-C (See Table 380-C on p. 10.)</b> |                                 |        |             |                                                                                     | <b>380-D (See Table 380-D on p. 11.)</b> |                              |        |             |                                                                                       |
| flatted                                  | standard, 9,53 mm [0.375 in]    | 1      | PC pin      |    | round                                    | standard, 9,53 mm [0.375 in] | 1      | solder lug  |    |
| <b>380-E (See Table 380-E on p. 12.)</b> |                                 |        |             |                                                                                     | <b>380-F (See Table 380-F on p. 13.)</b> |                              |        |             |                                                                                       |
| slotted                                  | high torque, 12,7 mm [0.500 in] | 1      | solder lug  |   | slotted                                  | standard, 9,53 mm [0.375 in] | 1      | solder lug  |  |
| <b>380-G (See Table 380-G on p. 14.)</b> |                                 |        |             |                                                                                     | <b>380-H (See Table 380-H on p. 14.)</b> |                              |        |             |                                                                                       |
| slotted                                  | standard, 9,53 mm [0.375] in    | 1      | solder lug  |  | slotted                                  | standard, 9,53 mm [0.375] in | 1      | fast-on     |  |
| <b>380-I (See Table 380-I on p. 15.)</b> |                                 |        |             |                                                                                     |                                          |                              |        |             |                                                                                       |
| slotted                                  | standard, 9,53 mm [0.375] in    | 2      | solder lug  |  |                                          |                              |        |             |                                                                                       |




# 380 Series Order Guides

Table 380-A Order Guide

| Catalog Listing            | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions                 |                               |                             |                               | RoHS Compliant | Mounting Hardware |
|----------------------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|----------------------------|-------------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                            | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Flat Length (mm [in]) | B<br>Flat Thickness (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 380000M8629                | 1 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 7,95 [0.313]               | 5,54 [0.218]                  | 19,46 [0.766]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380000M8630                | 2.5 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 7,95 [0.313]               | 5,54 [0.218]                  | 19,46 [0.766]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380000M8643                | 1 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 14,30 [0.563]              | 5,54 [0.218]                  | 25,4 [1.000]                | 9,53 [0.375]                  | yes            | unassembled       |
| 380000M8682                | 50 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 7,95 [0.313]               | 5,54 [0.218]                  | 19,46 [0.766]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380017M0007 <sup>1,2</sup> | 500              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 6 [7-42]                        | 12 [1.4]                  | yes        | 7,95 [0.313]               | 5,54 [0.218]                  | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 380017M8606                | 10 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 6 [7-42]                        | 12 [1.4]                  | yes        | 7,95 [0.313]               | 5,54 [0.218]                  | 19,05 [0.750]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380017M8768 <sup>1</sup>   | 25 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 6 [7-42]                        | 12 [1.4]                  | yes        | 7,95 [0.313]               | 5,54 [0.218]                  | 19,05 [0.750]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380017M9550 <sup>1</sup>   | 5 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 6 [7-42]                        | 12 [1.4]                  | yes        | 7,95 [0.313]               | 5,54 [0.218]                  | 19,05 [0.750]               | 9,53 [0.375]                  | yes            | unassembled       |

## Dimensional Drawings (For reference only: mm [in].)

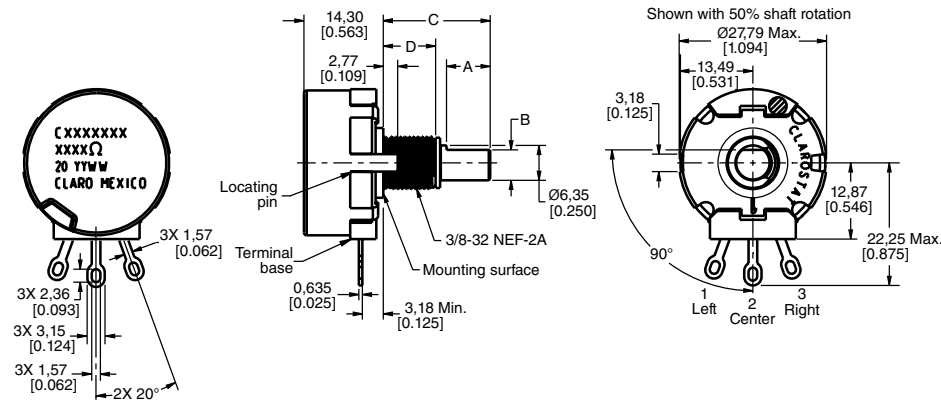

<sup>1</sup>Supplied with nickel-plated, phosphor bronze lock washer.

<sup>2</sup>Supplied with two mounting nuts.

# 380 Series Order Guides

Table 380-B Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                 |                               |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|----------------------------|-------------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Flat Length (mm [in]) | B<br>Flat Thickness (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 3800017M8956    | 10 k             | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 7.95 [0.313]               | 5.54 [0.218]                  | 19.05 [0.750]               | 9.53 [0.375]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)


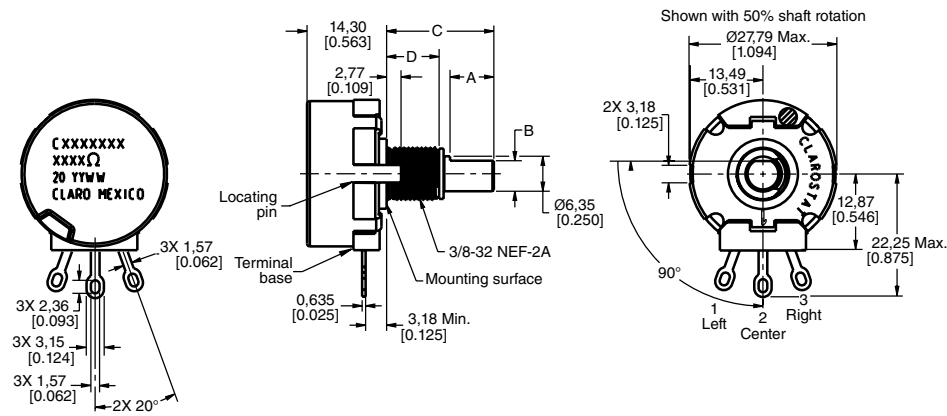


Table 380-C Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                 |                               |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|----------------------------|-------------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Flat Length (mm [in]) | B<br>Flat Thickness (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 380096M9088     | 10 k             | 10                               | 4                                | 4                                 | 288                                          | 312                                   | S-2   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 9.53 [0.375]               | 5.54 [0.218]                  | 22.23 [0.875]               | 9.27 [0.365]                  | yes            | none              |

Dimensional Drawings (For reference only: mm [in].)

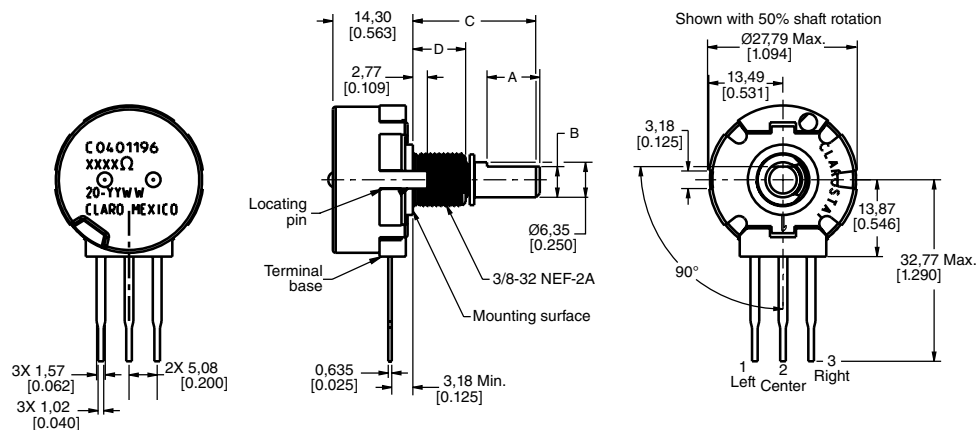


# 380 Series Order Guides

Table 380-D Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions             |                          | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|------------------------|--------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | Shaft Length (mm [in]) | Bushing Length (mm [in]) |                |                   |
| 380C1100        | 100              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 50,8 [2.000]           | 9,53 [0.375]             | yes            | unassembled       |
| 380C11000       | 1000             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 50,8 [2.000]           | 9,53 [0.375]             | yes            | unassembled       |
| 380C1100K       | 100 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 50,8 [2.000]           | 9,53 [0.375]             | yes            | unassembled       |
| 380C110K        | 10 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 50,8 [2.000]           | 9,53 [0.375]             | yes            | unassembled       |
| 380C11MEG       | 1 M              | 10                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 50,8 [2.000]           | 9,53 [0.375]             | yes            | unassembled       |
| 380C12000       | 2 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 50,8 [2.000]           | 9,53 [0.375]             | yes            | unassembled       |
| 380C120K        | 20 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 50,8 [2.000]           | 9,53 [0.375]             | no             | unassembled       |
| 380C1250        | 250              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 50,8 [2.000]           | 9,53 [0.375]             | yes            | unassembled       |
| 380C12500       | 2.5 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 50,8 [2.000]           | 9,53 [0.375]             | yes            | unassembled       |
| 380C125K        | 25 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 50,8 [2.000]           | 9,53 [0.375]             | yes            | unassembled       |
| 380C135K        | 35 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 50,8 [2.000]           | 9,53 [0.375]             | yes            | unassembled       |
| 380C1500        | 500              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 50,8 [2.000]           | 9,53 [0.375]             | yes            | unassembled       |
| 380C15000       | 5 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 50,8 [2.000]           | 9,53 [0.375]             | yes            | unassembled       |
| 380C1500K       | 500 k            | 10                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 50,8 [2.000]           | 9,53 [0.375]             | yes            | unassembled       |
| 380C150K        | 50 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 50,8 [2.000]           | 9,53 [0.375]             | yes            | unassembled       |

## Dimensional Drawings (For reference only: mm [in].)

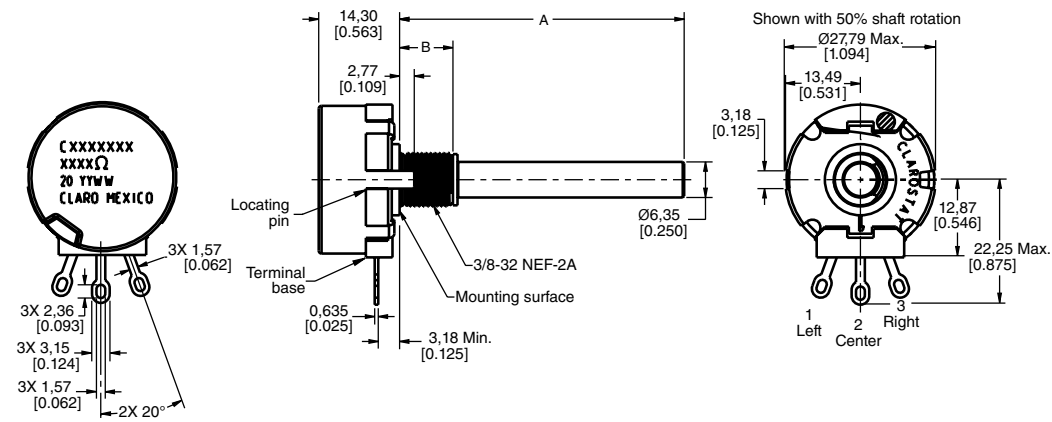


# 380 Series Order Guides

Table 380-E Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions                |                           |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|---------------------------|---------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Slot Depth (mm [in]) | B<br>Slot Width (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 380C2000        | 1 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]              | 1,19 [0.047]              | 15,88 [0.625]               | 12,7 [0.500]                  | yes            | unassembled       |
| 380C210K        | 10 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]              | 1,19 [0.047]              | 15,88 [0.625]               | 12,7 [0.500]                  | yes            | unassembled       |
| 380C225K        | 25 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]              | 1,19 [0.047]              | 15,88 [0.625]               | 12,7 [0.500]                  | yes            | unassembled       |
| 380C25000       | 5 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]              | 1,19 [0.047]              | 15,88 [0.625]               | 12,7 [0.500]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

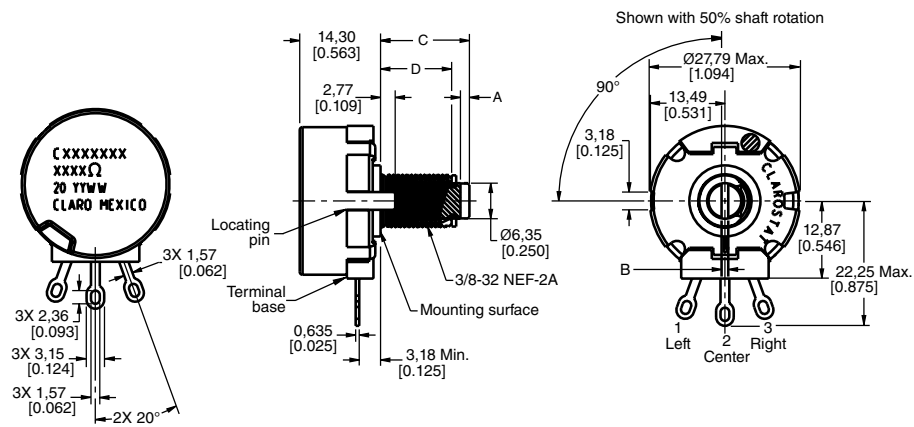


# 380 Series Order Guides

Table 380-F Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions                 |                           |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|----------------------------|---------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Slot Length (mm [in]) | B<br>Slot Width (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 380C3100        | 100              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380C31000       | 1 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380C3100K       | 100 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380C310K        | 10 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380C31MEG       | 1 M              | 10                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380C32000       | 2 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380C3200K       | 200 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 380C3250        | 250              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 380C32500       | 2.5 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380C3250K       | 250 k            | 10                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380C325K        | 25 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380C3500        | 500              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380C35000       | 5 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380C3500K       | 500 k            | 10                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380C350K        | 50 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |

## Dimensional Drawings (For reference only: mm [in].)

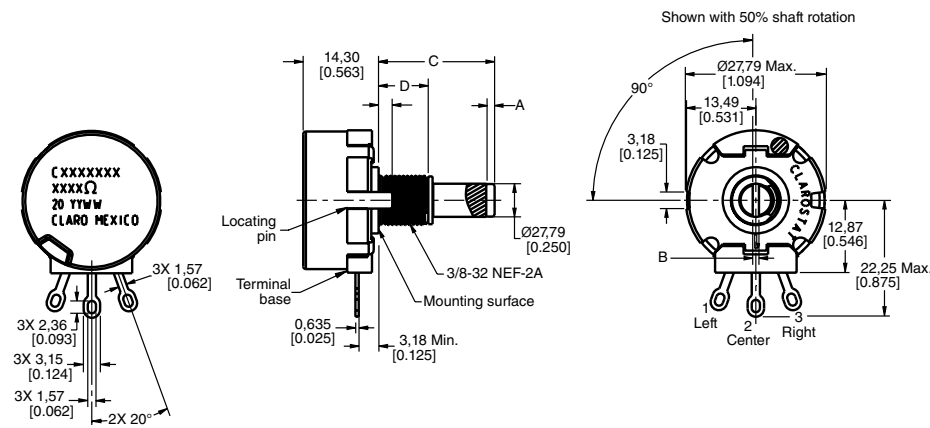


# 380 Series Order Guides

Table 380-G Order Guide

| Catalog Listing            | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                |                           |                             |                               | RoHS Compliant | Mounting Hardware |
|----------------------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|---------------------------|---------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                            | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Slot Depth (mm [in]) | B<br>Slot Width (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 3800000748500058           | 500 k            | 10                               | 5                                | 10                                | 274                                          | 312                                   | Z     | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 1,60 [0.063]              | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |
| 380101M9699 <sup>1,2</sup> | 2.5 M            | 10                               | 25                               | 10                                | 274                                          | 312                                   | Z     | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 1,60 [0.063]              | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

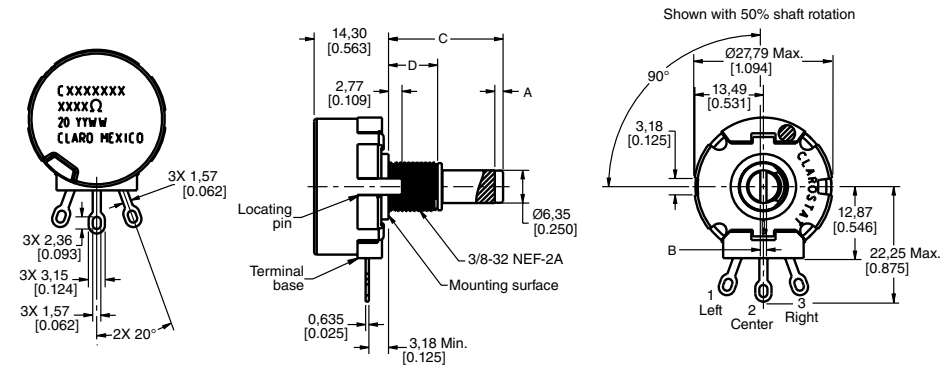


<sup>1</sup>Supplied with stainless-steel shaft.

<sup>2</sup>Supplied with nickel-plated beryllium copper retaining ring.

Table 380-H Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                 |                           |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|----------------------------|---------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Slot Length (mm [in]) | B<br>Slot Width (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 380099M9425     | 1 k              | 10                               | 4                                | 4                                 | 288                                          | 312                                   | S-2   | 312                          | 6-20 [42-141]                   | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

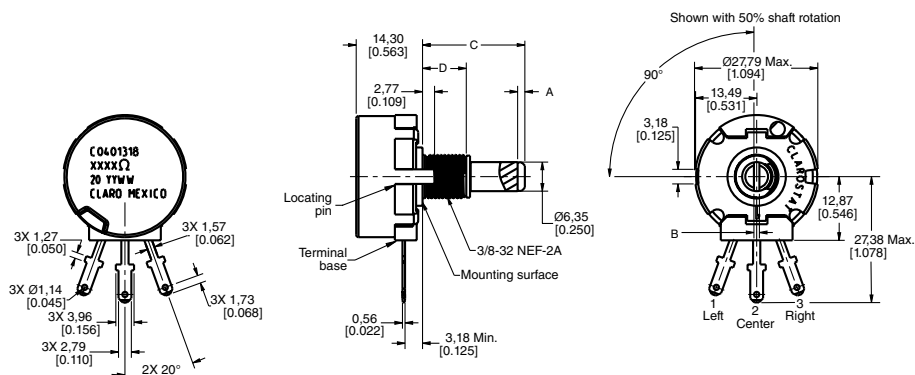


# 380 Series Order Guides

Table 380-I Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions                |                           |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|---------------------------|---------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Slot Depth (mm [in]) | B<br>Slot Width (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 380036M7444     | 1 k              | 10                        | 4                                | 4                                 | 310                                          | 344                              | S-3   | 360                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]              | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |



Dimensional Drawings (For reference only: mm [in].)

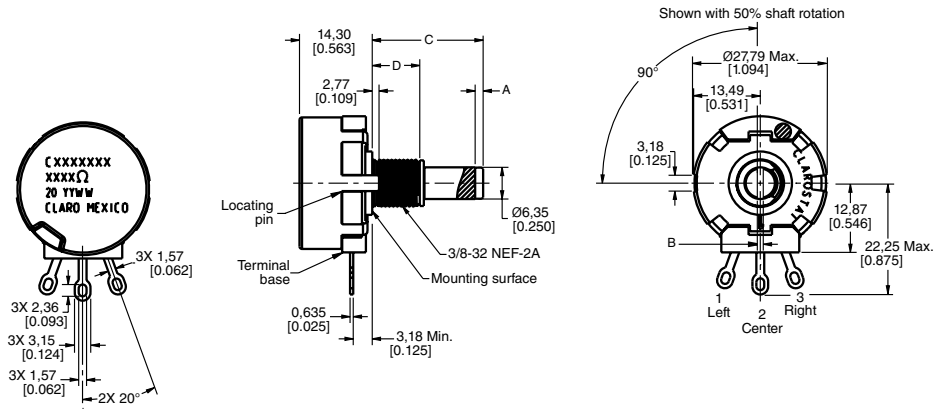



# RV4 Series Specific Configurations

Table 6. RV4 Series Specific Configurations

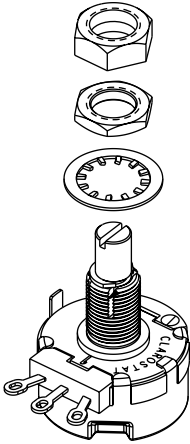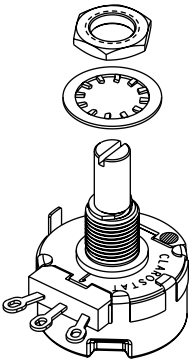
| Shaft Type                        | Bushing Type                    | AR Pin | Termination | Configuration with Associated Hardware                                            | Shaft Type                        | Bushing Type                 | AR Pin | Termination | Configuration with Associated Hardware                                              |
|-----------------------------------|---------------------------------|--------|-------------|-----------------------------------------------------------------------------------|-----------------------------------|------------------------------|--------|-------------|-------------------------------------------------------------------------------------|
| RV4-A (See Table RV4-A on p. 17.) |                                 |        |             |  | RV4-B (See Table RV4-B on p. 18.) |                              |        |             |  |
| slotted                           | high torque, 12,7 mm [0.500 in] | 1      | solder lug  |                                                                                   | slotted                           | standard, 9,53 mm [0.375 in] | 1      | solder lug  |                                                                                     |

# RV4 Series Order Guides

Table RV4-A Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                  |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Shaft Length (mm [in]) | B<br>Bushing Length (mm [in]) |                |                   |
| RV4LAYSD102A    | 1 k              | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 12,7 [0.500]                  | no             | unassembled       |
| RV4LAYSD103A    | 10 k             | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 12,7 [0.500]                  | no             | unassembled       |
| RV4LAYSD104A    | 100 k            | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 12,7 [0.500]                  | no             | unassembled       |
| RV4LAYSD502A    | 5 k              | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 12,7 [0.500]                  | no             | unassembled       |
| RV4LAYSD504A    | 500 k            | 10                               | 10                               | 10                                | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 12,7 [0.500]                  | no             | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

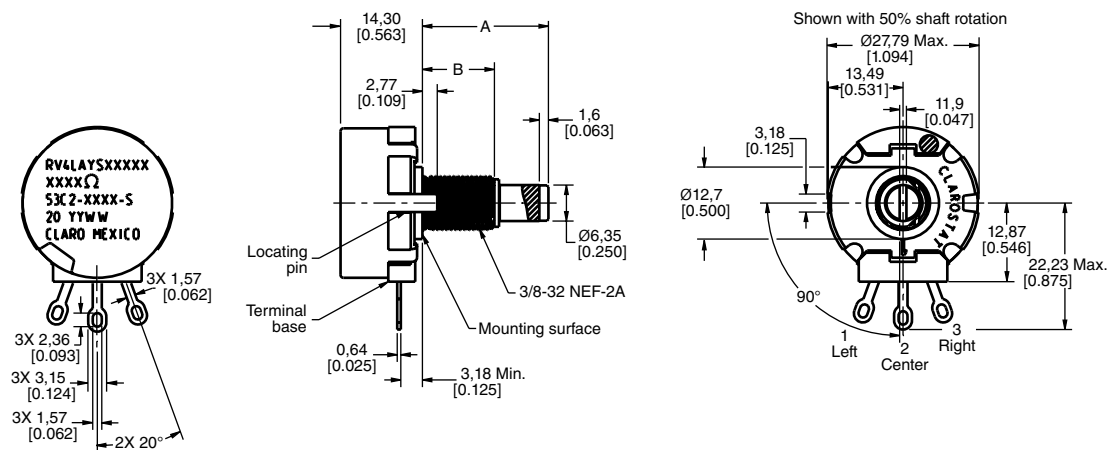


# RV4 Series Order Guides

Table RV4-B Order Guide









| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                  |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Shaft Length (mm [in]) | B<br>Bushing Length (mm [in]) |                |                   |
| RV4NAYSB101A    | 100              | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 12,7 [0.500]                | 9,53 [0.375]                  | no             | unassembled       |
| RV4NAYSB103A    | 10 k             | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 12,7 [0.500]                | 9,53 [0.375]                  | no             | unassembled       |
| RV4NAYSB503A    | 50 k             | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 12,7 [0.500]                | 9,53 [0.375]                  | no             | unassembled       |
| RV4NAYSK103A    | 10 k             | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 63,5 [2.500]                | 9,53 [0.375]                  | no             | unassembled       |
| RV4NAYSK502A    | 5 k              | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 63,5 [2.5,0]                | 9,53 [0.375]                  | no             | unassembled       |
| RV4SAYSD502A    | 5                | 10                               | -                                | -                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| RV4NAYSD503D    | 50 k             | 20                               | 500                              | 4                                 | 274                                          | 312                                   | Z     | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |

Dimensional Drawings (For reference only: mm [in.] )

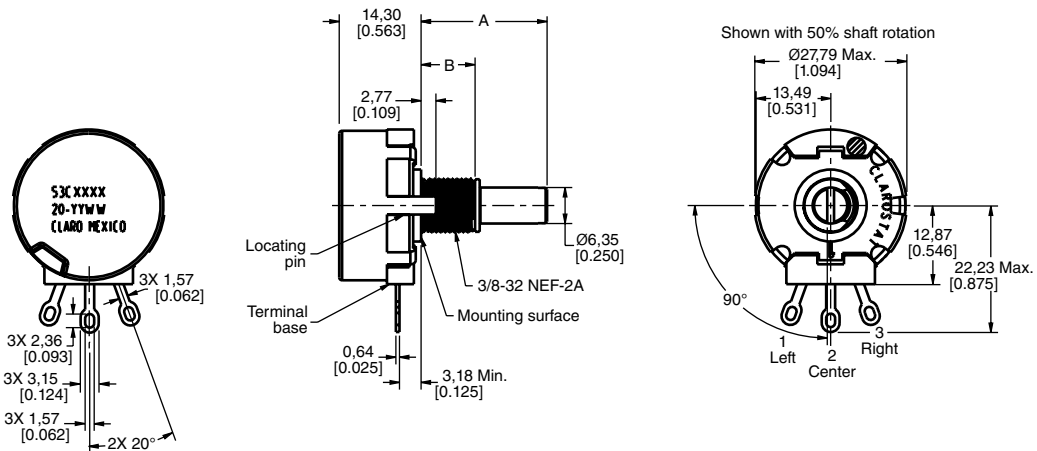









# 485 Series Specific Configurations

Table 7. 485 Series Specific Configurations
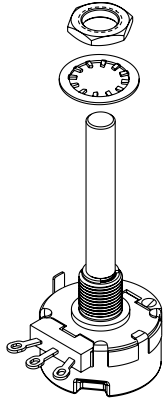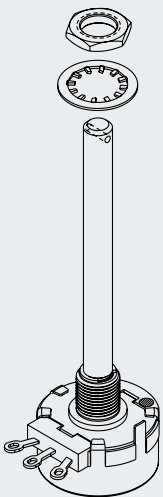
| Shaft Type                        | Bushing Type                 | AR Pin | Termination                | Configuration with Associated Hardware                                              | Shaft Type                        | Bushing Type                 | AR Pin | Termination                | Configuration with Associated Hardware                                                |
|-----------------------------------|------------------------------|--------|----------------------------|-------------------------------------------------------------------------------------|-----------------------------------|------------------------------|--------|----------------------------|---------------------------------------------------------------------------------------|
| 485-A (See Table 485-A on p. 22)  |                              |        |                            |                                                                                     | 485-B (See Table 485-B on p. 22.) |                              |        |                            |                                                                                       |
| flatted                           | standard, 9,53 mm [0.375 in] | 1      | solder lug                 |    | flatted                           | standard, 9,53 mm [0.375 in] | 1      | solder lug with center tap |    |
| 485-C (See Table 485-C on p. 23.) |                              |        |                            |                                                                                     | 485-D (See Table 485-D on p. 23.) |                              |        |                            |                                                                                       |
| round                             | standard, 6,35 mm [0.250 in] | 1      | solder lug with center tap |    | round                             | standard, 9,53 mm [0.375 in] | 1      | solder lug                 |    |
| 485-E (See Table 485-E on p. 24.) |                              |        |                            |                                                                                     | 485-F (See Table 485-F on p. 24.) |                              |        |                            |                                                                                       |
| round                             | standard, 9,53 mm [0.375 in] | 1      | solder lug                 |  | round                             | standard, 9,53 mm [0.375 in] | 1      | solder lug                 |  |
| 485-G (See Table 485-G on p. 25.) |                              |        |                            |                                                                                     | 485-H (See Table 485-H on p. 25.) |                              |        |                            |                                                                                       |
| round                             | standard, 9,53 mm [0.375 in] | 1      | solder lug                 |  | slotted                           | standard, 9,53 mm [0.375 in] | 1      | solder lug with center tap |  |





# 485 Series Specific Configurations

Table 7. 485 Series Specific Configurations (continued)
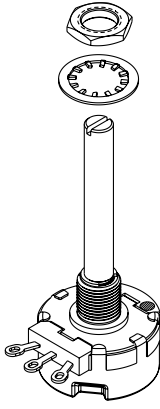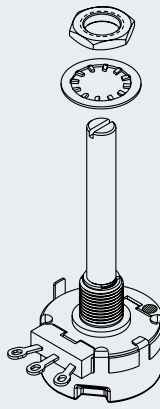
| Shaft Type                               | Bushing Type                                        | AR Pin | Termination | Configuration with Associated Hardware                                              | Shaft Type                               | Bushing Type                                        | AR Pin | Termination | Configuration with Associated Hardware                                                |
|------------------------------------------|-----------------------------------------------------|--------|-------------|-------------------------------------------------------------------------------------|------------------------------------------|-----------------------------------------------------|--------|-------------|---------------------------------------------------------------------------------------|
| <b>485-I (See Table 485-I on p. 26.)</b> |                                                     |        |             |                                                                                     | <b>485-J (See Table 485-J on p. 26.)</b> |                                                     |        |             |                                                                                       |
| slotted                                  | standard, 6,35 mm [0.250 in] and 9,53 mm [0.375 in] | 1      | solder lug  |    | slotted                                  | standard, 8,69 mm [0.342 in]                        | 0      | solder lug  |    |
| <b>485-K (See Table 485-K on p. 27.)</b> |                                                     |        |             |                                                                                     | <b>485-L (See Table 485-L on p. 27.)</b> |                                                     |        |             |                                                                                       |
| slotted                                  | standard, 9,53 mm [0.375 in]                        | 1      | solder lug  |   | slotted                                  | standard, 9,53 mm [0.375 in]                        | 1      | solder lug  |   |
| <b>485-M (See Table 485-M on p. 28.)</b> |                                                     |        |             |                                                                                     | <b>485-N (See Table 485-N on p. 28.)</b> |                                                     |        |             |                                                                                       |
| slotted                                  | standard, 7,9 mm [0.312 in]                         | 1      | solder lug  |  | slotted                                  | standard, 9,53 mm [0.375 in] and 12,7 mm [0.500 in] | 1      | solder lug  |  |
| <b>485-O (See Table 485-O on p. 29.)</b> |                                                     |        |             |                                                                                     | <b>485-P (See Table 485-P on p. 29.)</b> |                                                     |        |             |                                                                                       |
| slotted                                  | standard, 12,7 mm [0.500 in]                        | 1      | solder lug  |  | slotted                                  | standard, 9,53 mm [0.375 in]                        | 1      | solder lug  |  |

# 485 Series Specific Configurations

Table 7. 485 Series Specific Configurations (continued)
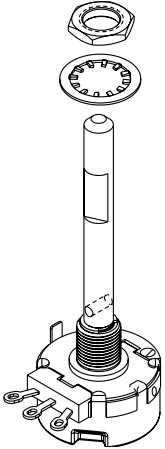
| Shaft Type                        | Bushing Type                 | AR Pin | Termination                | Configuration with Associated Hardware                                             | Shaft Type                        | Bushing Type                 | AR Pin | Termination | Configuration with Associated Hardware                                               |
|-----------------------------------|------------------------------|--------|----------------------------|------------------------------------------------------------------------------------|-----------------------------------|------------------------------|--------|-------------|--------------------------------------------------------------------------------------|
| 485-Q (See Table 485-Q on p. 30.) |                              |        |                            |   | 485-R (See Table 485-R on p. 30.) |                              |        |             |   |
| slotted                           | standard, 9,53 mm [0.375 in] | 1      | solder lug with center tap |                                                                                    | round                             | standard, 9,53 mm [0.375 in] | 1      | solder lug  |                                                                                      |
| 485-S (See Table 485-S on p. 31.) |                              |        |                            |  | 485-T (See Table 485-T on p. 31.) |                              |        |             |  |
| slotted                           | standard, 12,7 mm [0.500 in] | 1      | solder lug                 |                                                                                    | straight knurled                  | standard, 8,67 mm [0.342 in] | 1      | solder lug  |                                                                                      |

# 485 Series Order Guides

Table 485-A Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                 |                               |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|----------------------------|-------------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Flat Length (mm [in]) | B<br>Flat Thickness (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 485000M8990     | 5 k              | 10                               | 4                                | 4                                 | 112                                          | 312                                   | S-7   | 312                          | 1-4 [7-28]                      | 12 [1-4]                  | no         | 11,13 [0.438]              | 5,54 [0.218]                  | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)


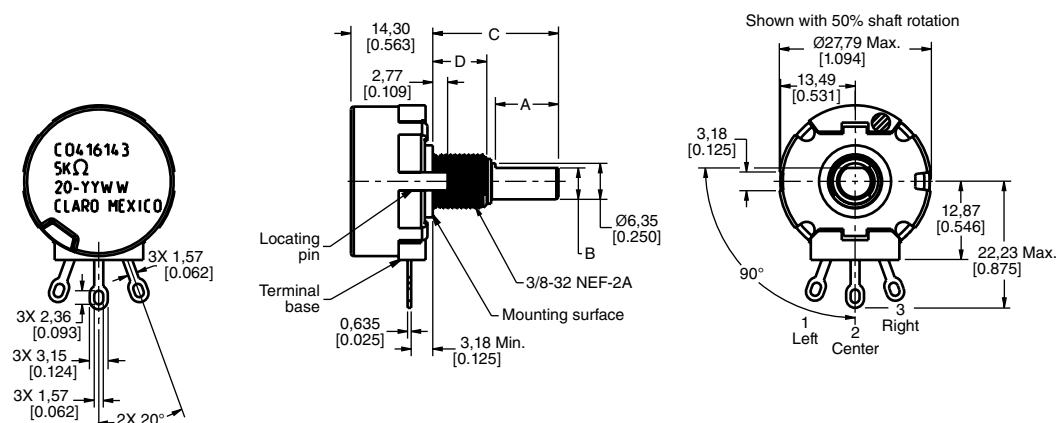


Table 485-B Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                 |                               |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|----------------------------|-------------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Flat Length (mm [in]) | B<br>Flat Thickness (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 485025M9052     | 10 k             | 10                               | 4                                | 4                                 | 112                                          | 312                                   | S-9   | 312                          | S-14                            | 12                        | no         | 11,13 [0.438]              | 5,54 [0.218]                  | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)



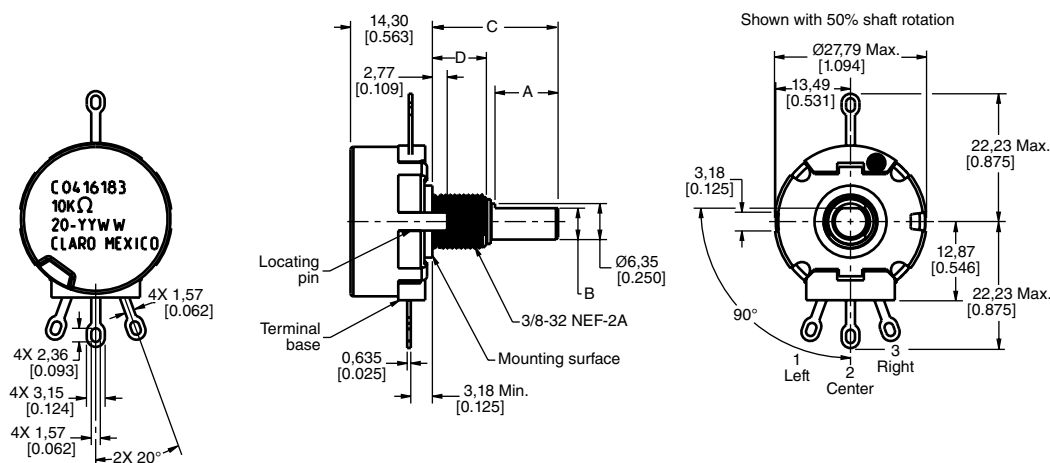


## 485 Series Order Guides

### Table 485-C Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions                      |                                   | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|---------------------------------|-----------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br><br>Shaft Length (mm [in]) | B<br><br>Bushing Length (mm [in]) |                |                   |
| 485025M8843     | 10 k             | 10                        | 4                                | 4                                 | 112                                          | 312                              | S-13  | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 15,88 [0.625]                   | 6,35 [0.250]                      | yes            | unassembled       |
| 485025M9267     | 5 k              | 10                        | 4                                | 4                                 | 112                                          | 312                              | S-13  | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 15,88 [0.625]                   | 6,35 [0.250]                      | yes            | unassembled       |


### Dimensional Drawings (For reference only: mm [in].)

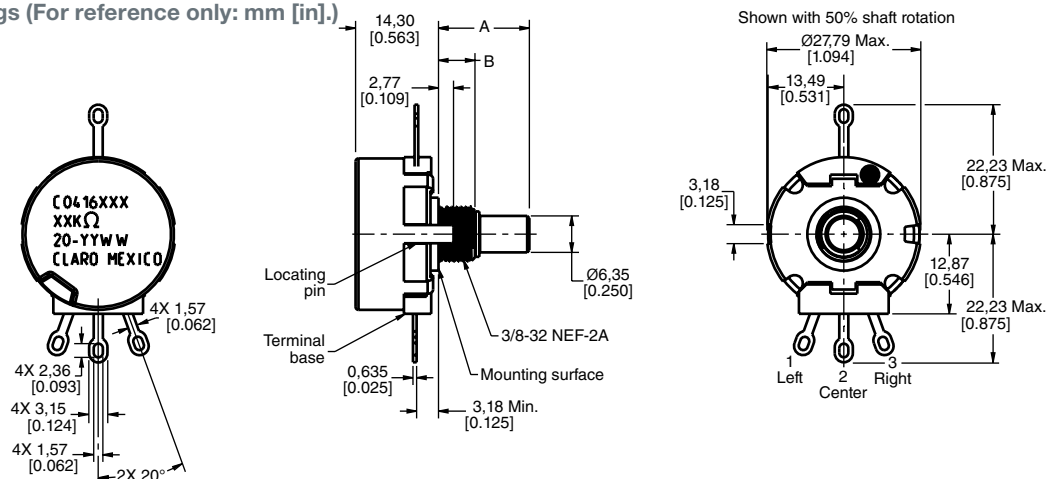

### Table 485-D Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions                      |                                   | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|---------------------------------|-----------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br><br>Shaft Length (mm [in]) | B<br><br>Bushing Length (mm [in]) |                |                   |
| 485008M7167     | 5 k              | 10                        | 4                                | 4                                 | 284                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 22,23 [0.875]                   | 9,53 [0.375]                      | yes            | unassembled       |

### Dimensional Drawings (For reference only: mm [in].)

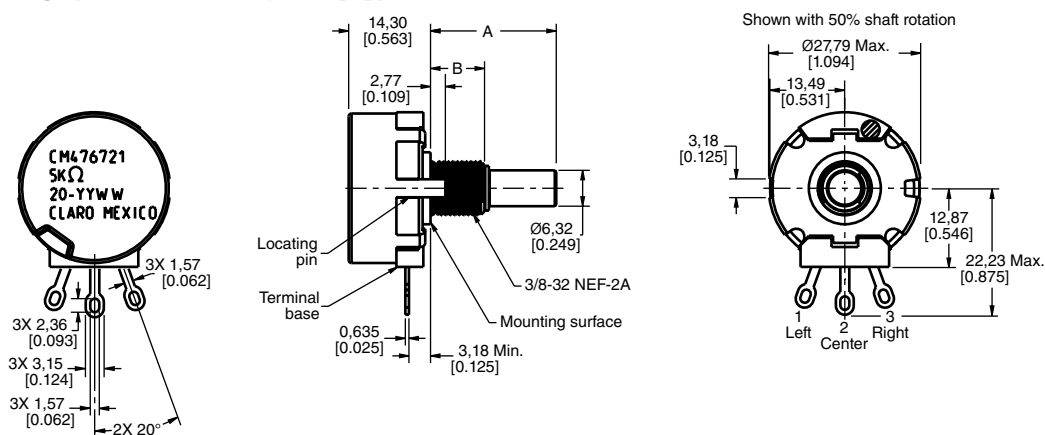

# 485 Series Order Guides

Table 485-E Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                  |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Shaft Length (mm [in]) | B<br>Bushing Length (mm [in]) |                |                   |
| 485000M8930     | 5 k              | 10                               | 4                                | 4                                 | 284                                          | 312                                   | S-16  | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 50,8 [2.000]                | 9,53 [0.375]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)


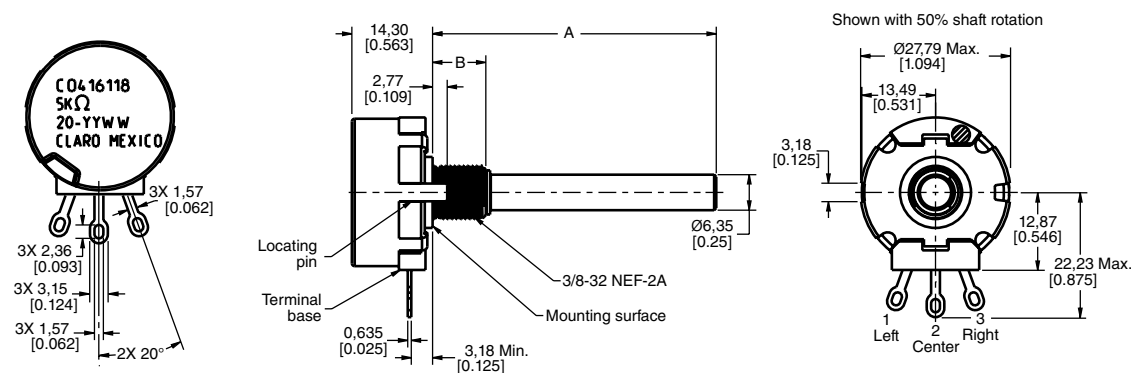


Table 485-F Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                  |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Shaft Length (mm [in]) | B<br>Bushing Length (mm [in]) |                |                   |
| 485000M9156     | 10 k             | 10                               | 4                                | 100                               | 284                                          | 312                                   | S-11  | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 31,75 [1.250]               | 9,53 [0.375]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

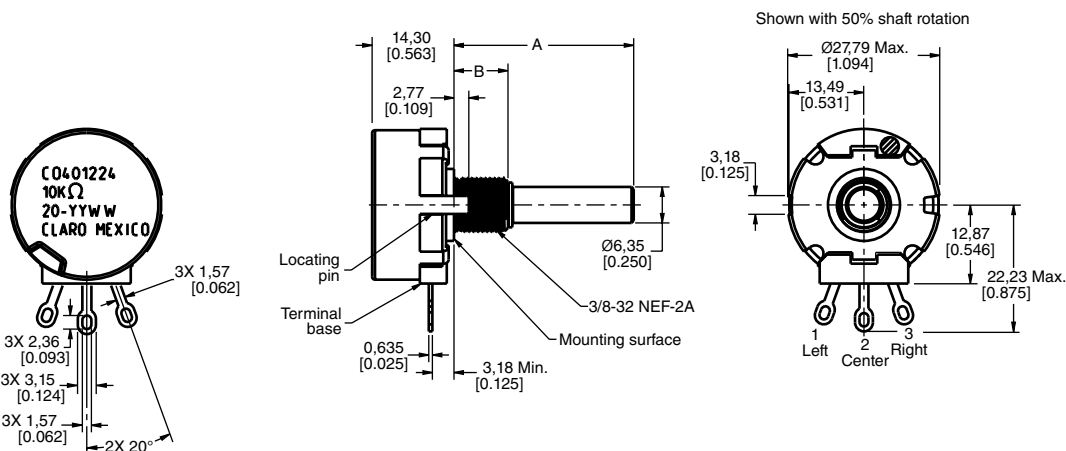

# 485 Series Order Guides

Table 485-G Order Guide

| 8.5         | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions                  |                               | RoHS Compliant | Mounting Hardware |
|-------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-----------------------------|-------------------------------|----------------|-------------------|
|             | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Shaft Length (mm [in]) | B<br>Bushing Length (mm [in]) |                |                   |
| 485004M8986 | 25 k             | 10                        | 4                                | 4                                 | 180                                          | 348                              | S-6   | 360                          | 1-4 [7-28]                      | -                         | no         | 76,2 [3.000]                | 9,53 [0.375]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)


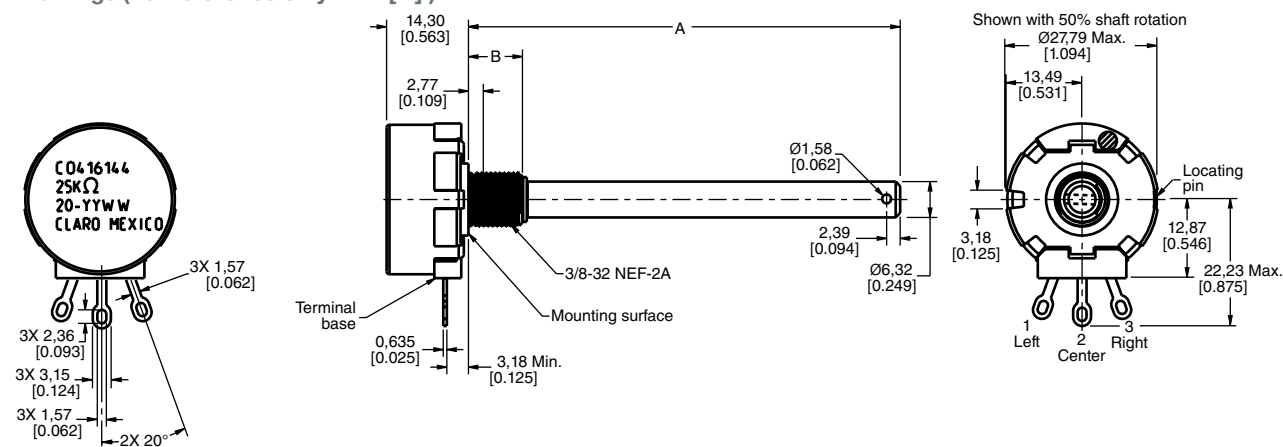


Table 485-H Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions                 |                           |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|----------------------------|---------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Slot Length (mm [in]) | B<br>Slot Width (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 485025M9428     | 10 k             | 10                        | 4                                | 4                                 | 263                                          | 312                              | S-8   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |
| 485042M9576     | 1 k              | 10                        | 4                                | 4                                 | 263                                          | 312                              | S-8   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]              | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

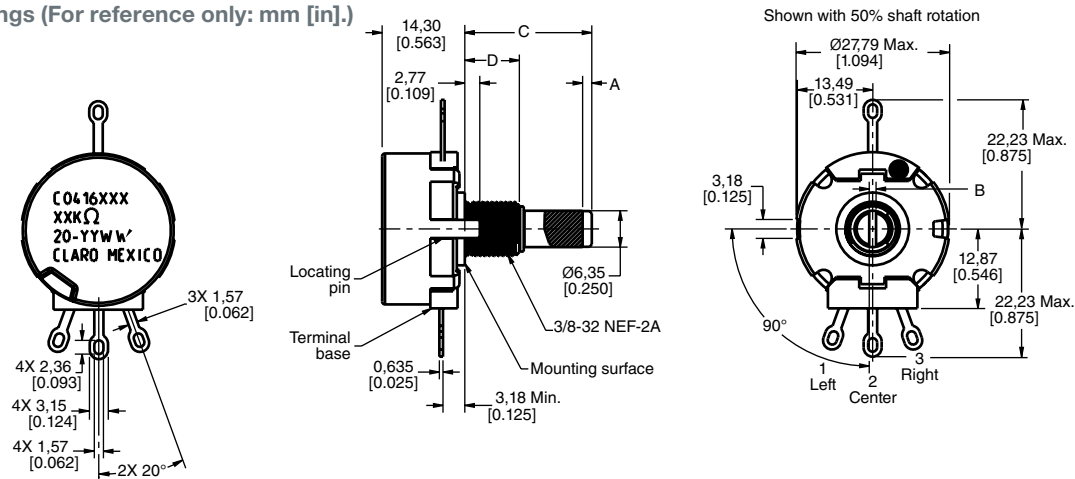

# 485 Series Order Guides

Table 485-I Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions              |                         |                          |                            | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-------------------------|-------------------------|--------------------------|----------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A Slot Length (mm [in]) | B Depth Width (mm [in]) | C Shaft Length (mm [in]) | D Bushing Length (mm [in]) |                |                   |
| 485000M8723     | 5 k              | 10                               | 4                                | 4                                 | 284                                          | 312                                   | S-9   | 312                          | 1-4 [1-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]            | 1,19 [0.047]            | 22,23 [0.875]            | 9,53 [0.375]               | yes            | unassembled       |
| 485000M9564     | 50 k             | 10                               | 4                                | 4                                 | 284                                          | 312                                   | S-9   | 312                          | 1-4 [1-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]            | 1,19 [0.047]            | 22,23 [0.875]            | 9,53 [0.75]                | yes            | unassembled       |
| 485000M9641     | 10 k             | 10                               | 4                                | 4                                 | 284                                          | 312                                   | S-9   | 312                          | 1-4 [1-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]            | 1,19 [0.047]            | 22,23 [0.875]            | 9,53 [0.375]               | yes            | unassembled       |
| 485000M9708     | 1 k              | 10                               | 4                                | 4                                 | 284                                          | 312                                   | S-9   | 312                          | 1-4 [1-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]            | 1,19 [0.047]            | 15,88 [0.625]            | 6,35 [0.250]               | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)


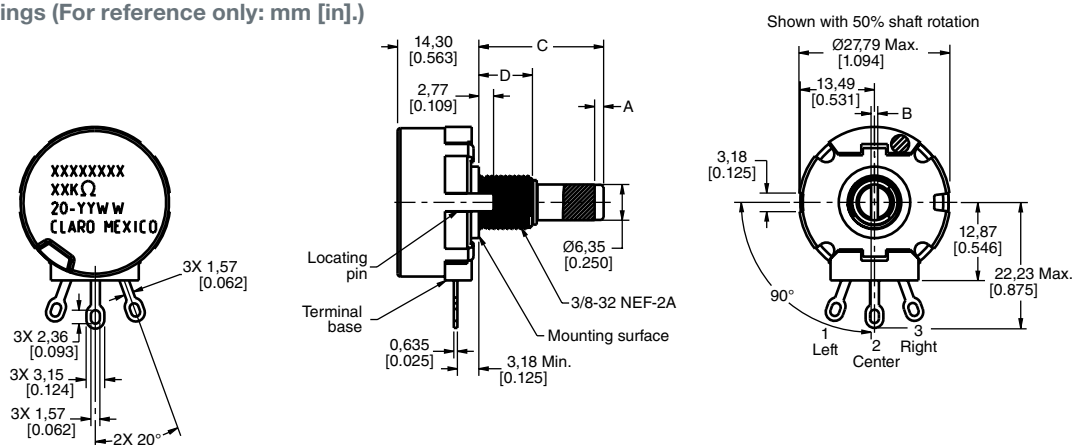


Table 485-J Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions             |                        |                          |                            | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|------------------------|------------------------|--------------------------|----------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A Slot Depth (mm [in]) | B Slot Width (mm [in]) | C Shaft Length (mm [in]) | D Bushing Length (mm [in]) |                |                   |
| 485000M9017     | 1 M              | 10                               | 10                               | 10                                | 284                                          | 312                                   | S-4   | 312                          | 1-4 [1-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]           | 1,19 [0.047]           | 50,8 [2.000]             | 9,53 [0.375]               | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

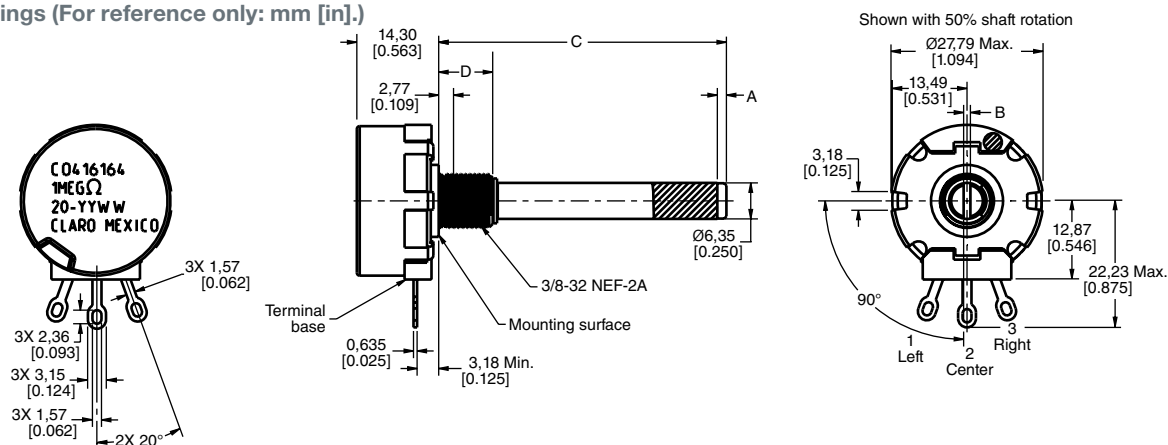

# 485 Series Order Guides

Table 485-K Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions             |                        |                          |                            | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|------------------------|------------------------|--------------------------|----------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A Slot Depth (mm [in]) | B Slot Width (mm [in]) | C Shaft Length (mm [in]) | D Bushing Length (mm [in]) |                |                   |
| 485042M9668     | 10 k             | 10                        | 4                                | 100                               | 284                                          | 311                              | S-7   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 1,60 [0.063]           | 1,19 [0.047]           | 22,23 [0.875]            | 9,53 [0.375]               | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)


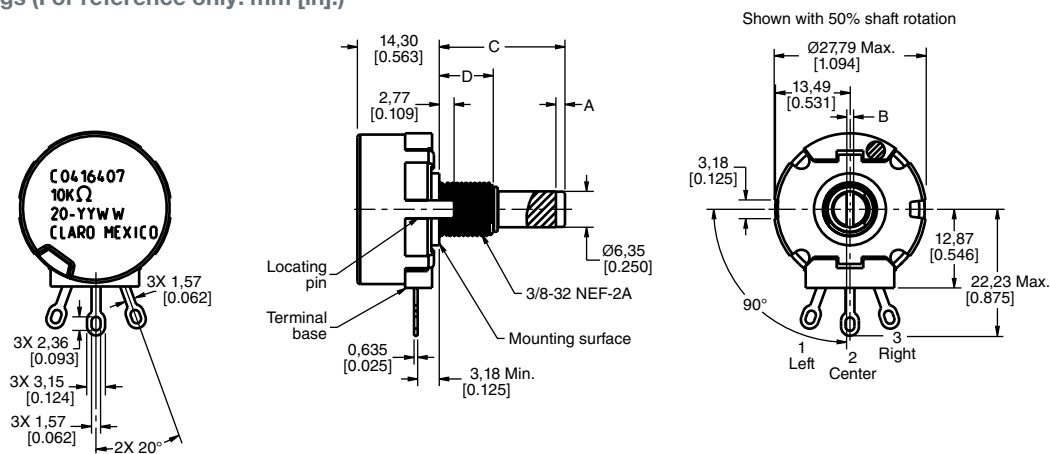


Table 485-L Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions             |                        |                          |                            | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|------------------------|------------------------|--------------------------|----------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A Slot Depth (mm [in]) | B Slot Width (mm [in]) | C Shaft Length (mm [in]) | D Bushing Length (mm [in]) |                |                   |
| 485000M8911     | 1 M              | 10                        | 10                               | 10                                | 304                                          | 312                              | S-2   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]           | 1,19 [0.047]           | 22,23 [0.875]            | 9,53 [0.375]               | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

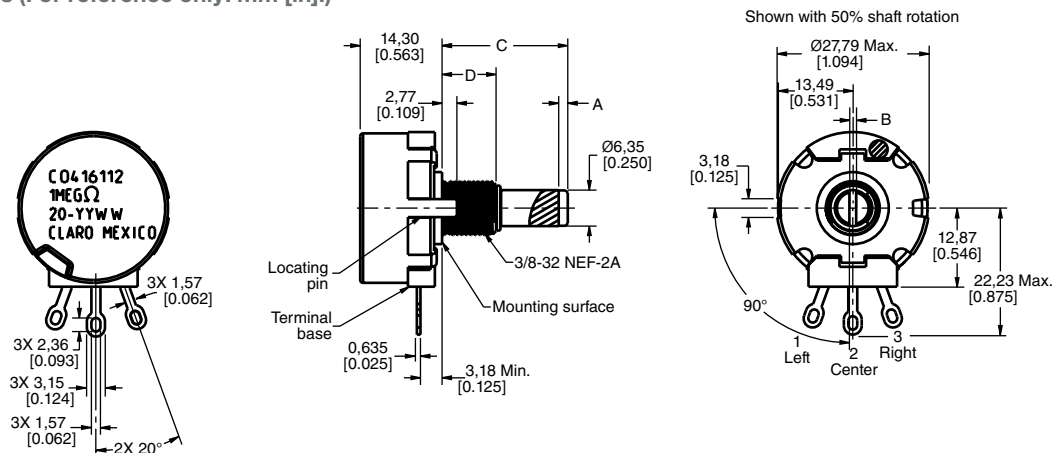

# 485 Series Order Guides

Table 485-M Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions                |                           |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|---------------------------|---------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Slot Depth (mm [in]) | B<br>Slot Width (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 485010M6860     | 5 k              | 10                        | 4                                | 4                                 | 33                                           | 312                              | S-9   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]              | 1,19 [0.047]              | 27,19 [1.031]               | 7,92 [0.312]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)


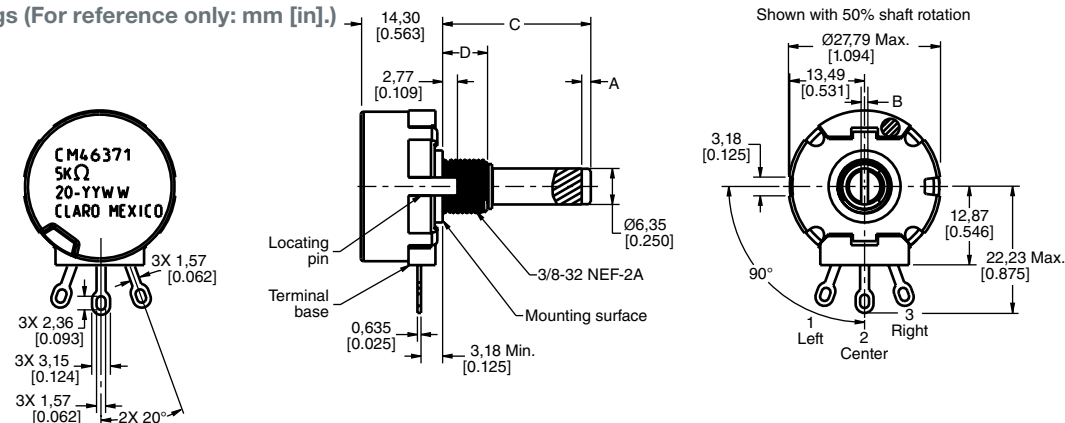


Table 485-N Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions             |                        |                          |                            | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|------------------------|------------------------|--------------------------|----------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A Slot Depth (mm [in]) | B Slot Width (mm [in]) | C Shaft Length (mm [in]) | D Bushing Length (mm [in]) |                |                   |
| 485000M8990     | 5 k              | 10                        | 4                                | 4                                 | 45                                           | 312                              | S-10  | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 1,60 [0.063]           | 1,19 [0.047]           | 20,62 [0.182]            | 12,7 [0.500]               | yes            | unassembled       |
| 485008M0002     | 5 k              | 10                        | 4                                | 4                                 | 45                                           | 312                              | S-10  | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 1,60 [0.063]           | 1,19 [0.047]           | 50,8 [2.000]             | 12,7 [0.500]               | no             | unassembled       |
| 485008M8967     | 5 k              | 10                        | 4                                | 4                                 | 45                                           | 312                              | S-10  | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 1,60 [0.063]           | 1,19 [0.047]           | 50,8 [2.000]             | 12,7 [0.500]               | yes            | unassembled       |
| 485008M9458     | 5 k              | 10                        | 4                                | 4                                 | 45                                           | 312                              | S-10  | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 1,60 [0.063]           | 1,19 [0.047]           | 50,8 [2.000]             | 9,53 [0.375]               | yes            | unassembled       |
| 485008M9687     | 5 k              | 10                        | 4                                | 4                                 | 45                                           | 312                              | S-10  | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 1,60 [0.063]           | 1,19 [0.047]           | 47,63 [1.875]            | 9,53 [0.375]               | yes            | unassembled       |
| 485008M9688     | 5 k              | 10                        | 4                                | 4                                 | 45                                           | 312                              | S-A   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 1,60 [0.063]           | 1,19 [0.047]           | 39,88 [1.570]            | 12,7 [0.500]               | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

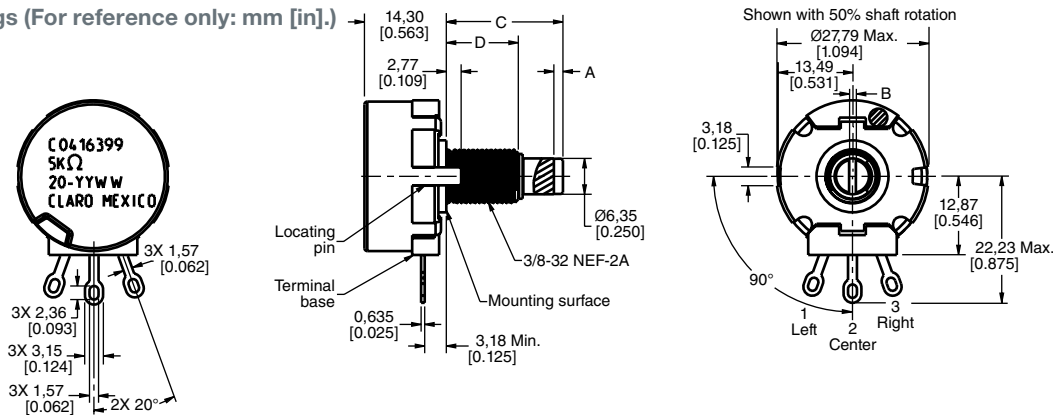

# 485 Series Order Guides

Table 485-O Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                |                           |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|---------------------------|---------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Slot Depth (mm [in]) | B<br>Slot Width (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 485008M0004     | 5 k              | 10                               | 4                                | 4                                 | 45                                           | 312                                   | S-10  | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 1,60 [0.063]              | 1,19 [0.047]              | 25,4 [1.000]                | 12,7 [0.500]                  | no             | unassembled       |

Dimensional Drawings (For reference only: mm [in].)


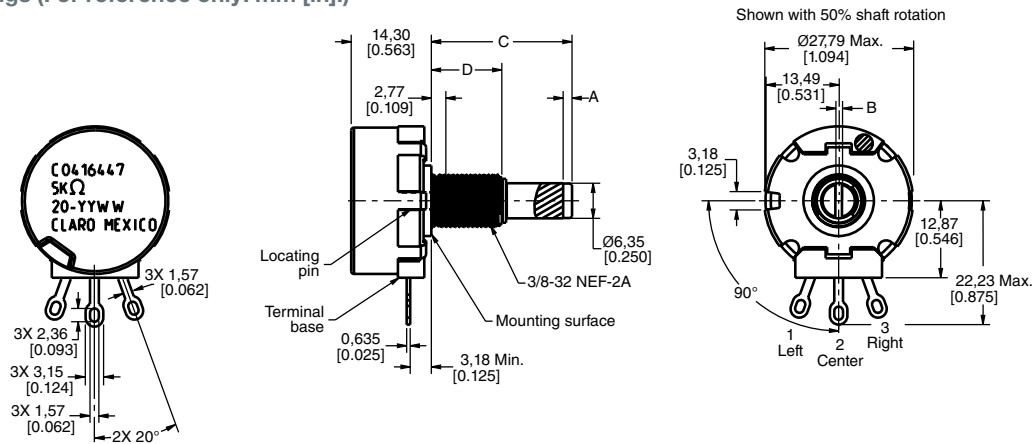


Table 485-P Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                |                           |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|---------------------------|---------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Slot Depth (mm [in]) | B<br>Slot Width (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 485000M9651     | 20 k             | 10                               | 4                                | 4                                 | 46                                           | 312                                   | S-10  | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]              | 1,19 [0.047]              | 50,8 [2.000]                | 9,53 [0.375]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)



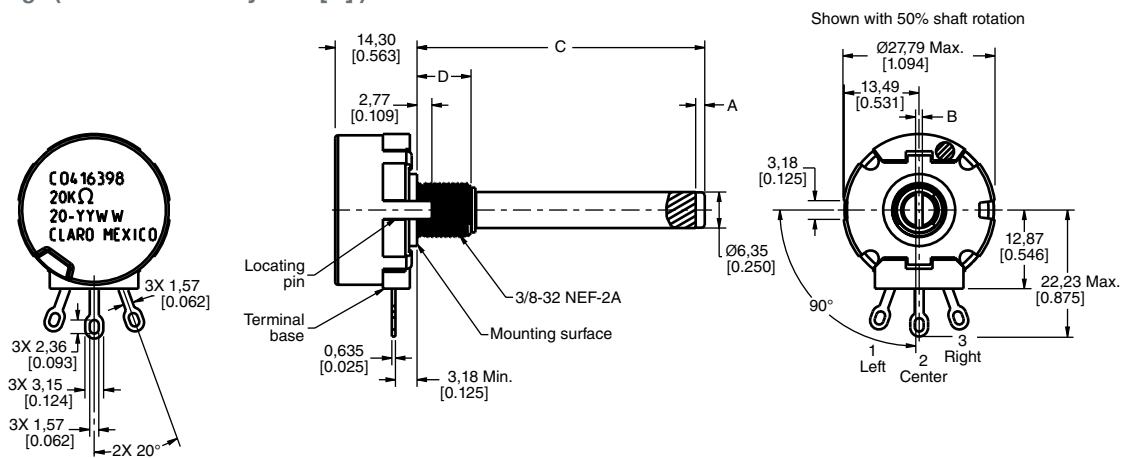

# 485 Series Order Guides

Table 485-Q Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                |                           |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|---------------------------|---------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Slot Depth (mm [in]) | B<br>Slot Width (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 485030M9652     | 10 k             | 10                               | 4                                | 4                                 | 270                                          | 348                                   | S-12  | 360                          | 1-4                             | -                         | no         | 1,60 [0.063]              | 1,19 [0.047]              | 50,8 [2.000]                | 9,53 [0.375]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)


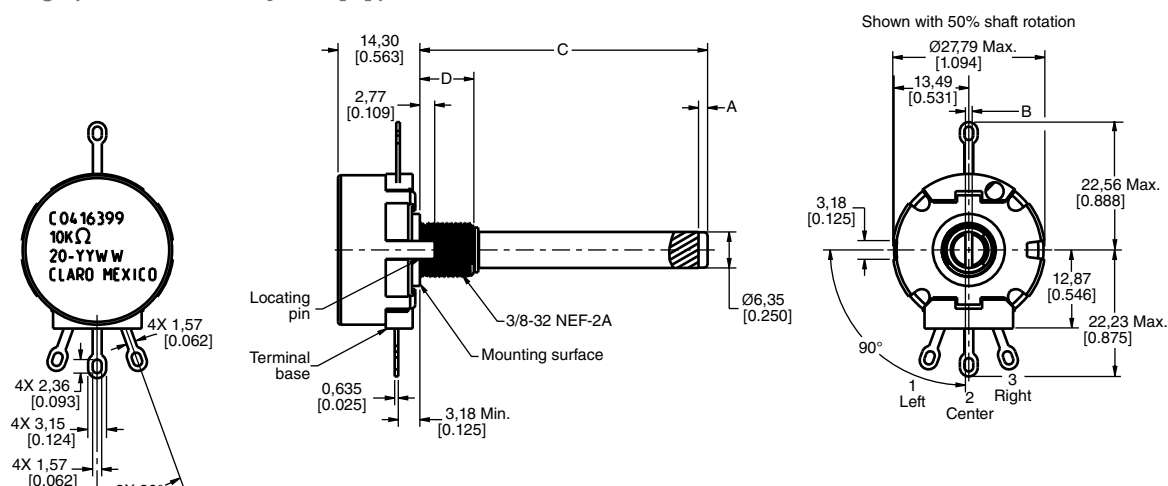


Table 485-R Series Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                  |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Shaft Length (mm [in]) | B<br>Bushing Length (mm [in]) |                |                   |
| 485040M9512     | 1 k              | 10                               | 4                                | 4                                 | 250                                          | 312                                   | S-5   | 312                          | 1-4                             | 12                        | no         | 63,5 [2.500]                | 9,53 [0.375]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)



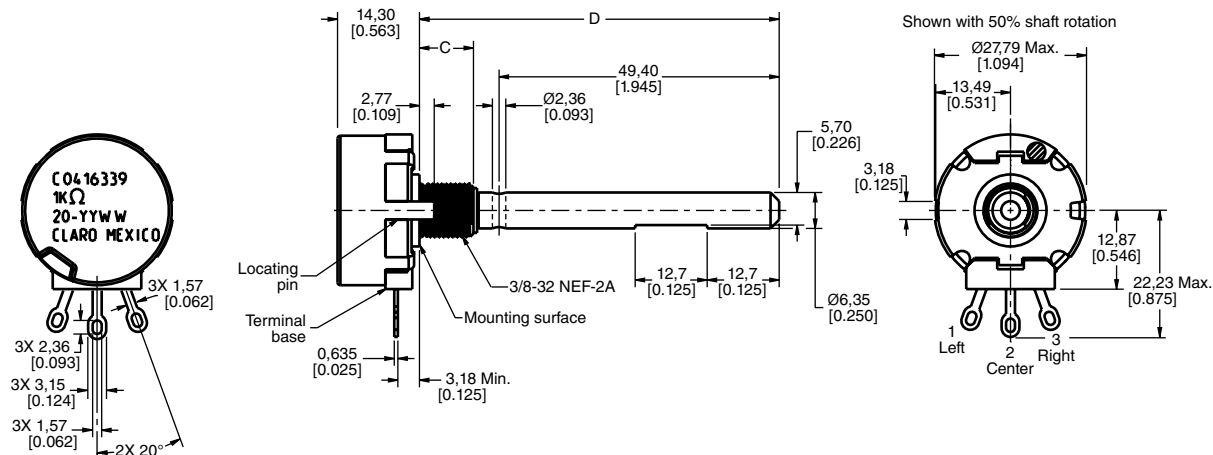

# 485 Series Order Guides

Table 485-S Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                |                           |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|---------------------------|---------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Slot Depth (mm [in]) | B<br>Slot Width (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 485048M9728     | 5 k              | 5                                | 4                                | 4                                 | 45                                           | 312                                   | S-15  | 312                          | 1-6                             | 12                        | yes        | 0,23 [0.009]              | 1,19 [0.047]              | 25,15 [0.990]               | 12,7 [0.500]                  | no             | unassembled       |

Dimensional Drawings (For reference only: mm [in].)


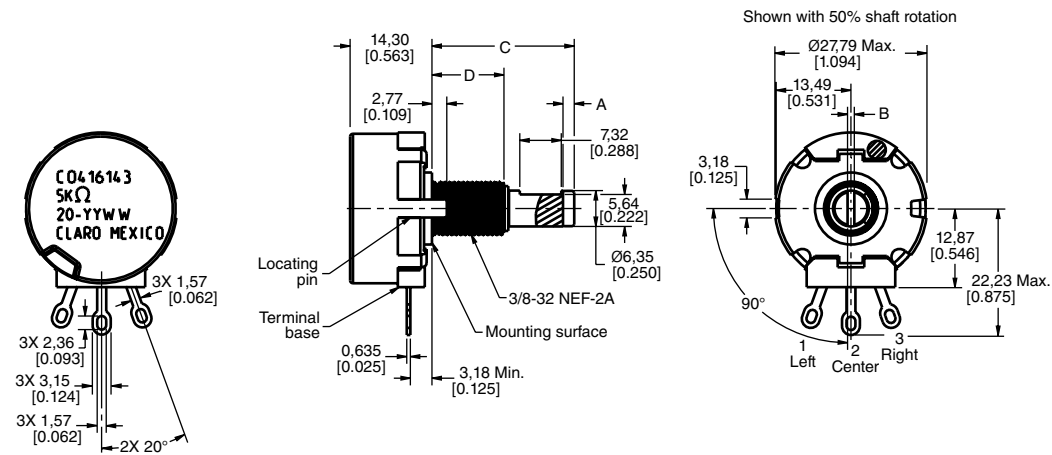


Table 485-T Order Guide




| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                  |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Shaft Length (mm [in]) | B<br>Bushing Length (mm [in]) |                |                   |
| 485022M8995     | 20 k             | 10                               | 4                                | 4                                 | 158                                          | 348                                   | S-8   | 360                          | 1-4                             | -                         | no         | 19,05 [0.750]               | 8,69 [0.342]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

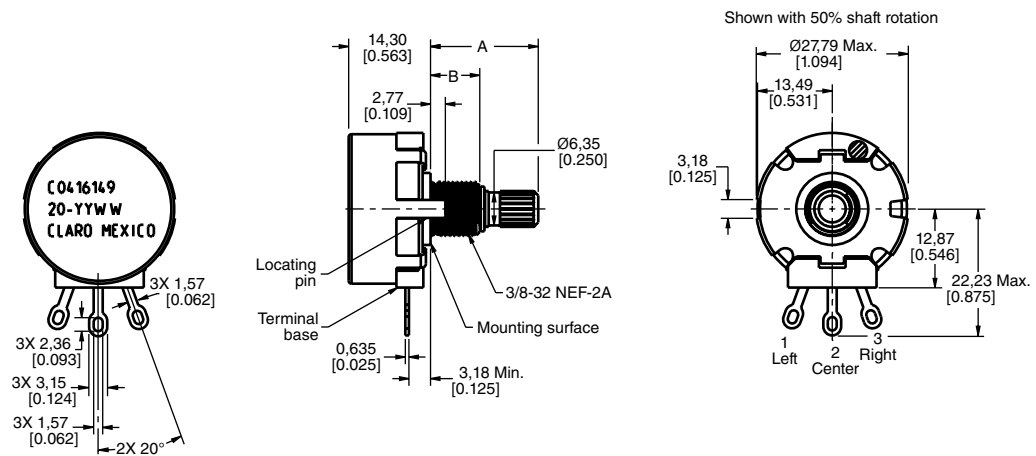

# 53C Series Specific Configurations

Table 8. 53C Series Specific Configurations
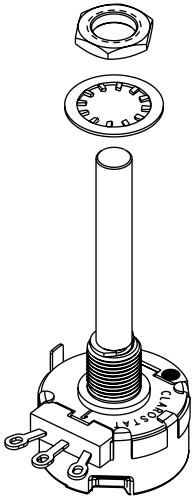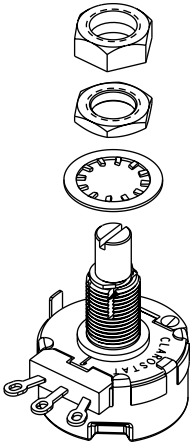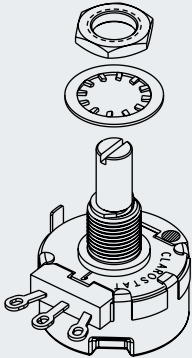
| Shaft Type                          | Bushing Type                 | AR Pin | Termination | Configuration with Associated Hardware                                              | Shaft Type                      | Bushing Type                    | AR Pin | Termination | Configuration with Associated Hardware                                              |
|-------------------------------------|------------------------------|--------|-------------|-------------------------------------------------------------------------------------|---------------------------------|---------------------------------|--------|-------------|-------------------------------------------------------------------------------------|
| 53C1 (See Table 53C1 on pp. 33-34.) |                              |        |             |                                                                                     | 53C2 (See Table 53C2 on p. 35.) |                                 |        |             |                                                                                     |
| round                               | standard, 9,53 mm [0.375 in] | 1      | solder lug  |    | slotted                         | high torque, 12,7 mm [0.500 in] | 1      | solder lug  |  |
| 53C3 (See Table 53C3 on pp. 36-37.) |                              |        |             |                                                                                     |                                 |                                 |        |             |                                                                                     |
| slotted                             | standard, 6,35 mm [0.25 in]  | 1      | solder lug  |  |                                 |                                 |        |             |                                                                                     |

# 53C Series Order Guides

Table 53C1 Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                  |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Shaft Length (mm [in]) | B<br>Bushing Length (mm [in]) |                |                   |
| 53C1100         | 100              | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C1100K        | 100 k            | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C110K         | 10 k             | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C110MEG       | 10 M             | 20                               | 10                               | 10                                | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C11500        | 1.5 k            | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C115K         | 15 k             | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C11K          | 1 k              | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C11MEG        | 1 M              | 20                               | 10                               | 10                                | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C120K         | 20 k             | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C1250         | 250              | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C12500        | 2.5 k            | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C1250K        | 250 k            | 10                               | 10                               | 10                                | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C125K         | 25 k             | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C12K          | 2 k              | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C135K         | 35 k             | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C150          | 50 k             | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C1500         | 500              | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C1500K        | 500 k            | 10                               | 10                               | 10                                | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C150K         | 50 k             | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C15K          | 5 k              | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C15MEG        | 5 M              | 20                               | 10                               | 10                                | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C1SW100K      | 100 k            | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |
| 53C1SW10K       | 10 k             | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,80 [2.00]                | 9,53 [0.375]                  | yes            | unassembled       |


(Continued on next page.)

# 53C Series Order Guide

Table 53C1 Order Guide (continued)

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions                  |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Shaft Length (mm [in]) | B<br>Bushing Length (mm [in]) |                |                   |
| 53C1100KZ       | 100 k            | 10                        | 1 k                              | 4                                 | 274                                          | 312                              | Z     | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,8 [2.00]                 | 9,53 [0.375]                  | yes            | unassembled       |
| 53C110KZ        | 10 k             | 10                        | 100                              | 4                                 | 274                                          | 312                              | Z     | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,8 [2.00]                 | 9,53 [0.375]                  | yes            | unassembled       |
| 53C11MEGZ       | 1 M              | 20                        | 10 k                             | 10                                | 274                                          | 312                              | Z     | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,8 [2.00]                 | 9,53 [0.375]                  | yes            | unassembled       |
| 53C1250KZ       | 250 k            | 10                        | 2.5 k                            | 10                                | 274                                          | 312                              | Z     | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,8 [2.00]                 | 9,53 [0.375]                  | yes            | unassembled       |
| 53C125KZ        | 25 k             | 10                        | 250                              | 4                                 | 274                                          | 312                              | Z     | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,8 [2.00]                 | 9,53 [0.375]                  | yes            | unassembled       |
| 53C1500KZ       | 500 k            | 10                        | 5 k                              | 10                                | 274                                          | 312                              | Z     | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,8 [2.00]                 | 9,53 [0.375]                  | yes            | unassembled       |
| 53C150KZ        | 50 k             | 10                        | 500                              | 4                                 | 274                                          | 312                              | Z     | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,8 [2.00]                 | 9,53 [0.375]                  | yes            | unassembled       |
| 53C15KZ         | 5 k              | 10                        | 50                               | 4                                 | 274                                          | 312                              | Z     | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,8 [2.00]                 | 9,53 [0.375]                  | yes            | unassembled       |
| 53C1-100K-RZ    | 100 k            | 10                        | 1 k                              | 4                                 | 274                                          | 312                              | RZ    | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 50,8 [2.00]                 | 9,53 [0.375]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

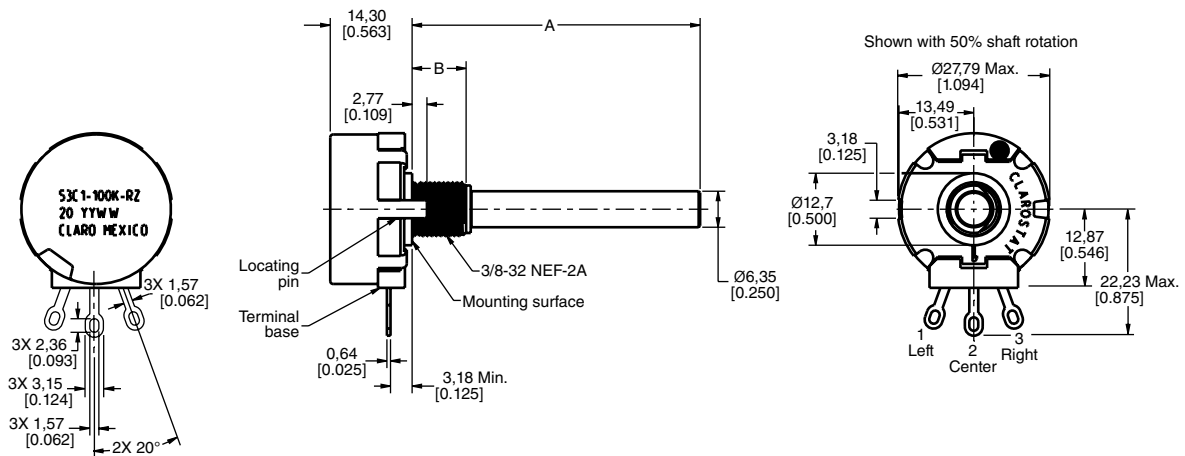


# 53C Series Order Guides

Table 53C2 Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions             |                          | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|------------------------|--------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | Shaft Length (mm [in]) | Bushing Length (mm [in]) |                |                   |
| 53C2100         | 100              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C2100K        | 100 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C210K         | 10 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C21500        | 1.5 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C2150K        | 150 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C215K         | 15 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C21K          | 1 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C21MEG        | 1 M              | 10                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C22.5MEG      | 2.5 M            | 20                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C220K         | 20 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C2250         | 250              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C22500        | 2.5 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C2250K        | 250 k            | 10                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C225K         | 25 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C22K          | 2 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C22MEG        | 2 M              | 20                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C23.5MEG      | 3.5 M            | 20                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C250          | 50               | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C2500         | 500              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C2500K        | 500 k            | 10                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C250K         | 50 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C25K          | 5 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |
| 53C25MEG        | 5 M              | 20                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 15,88 [0.625]          | 12,7 [0.500]             | no             | unassembled       |

## Dimensional Drawings (For reference only: mm [in.] )

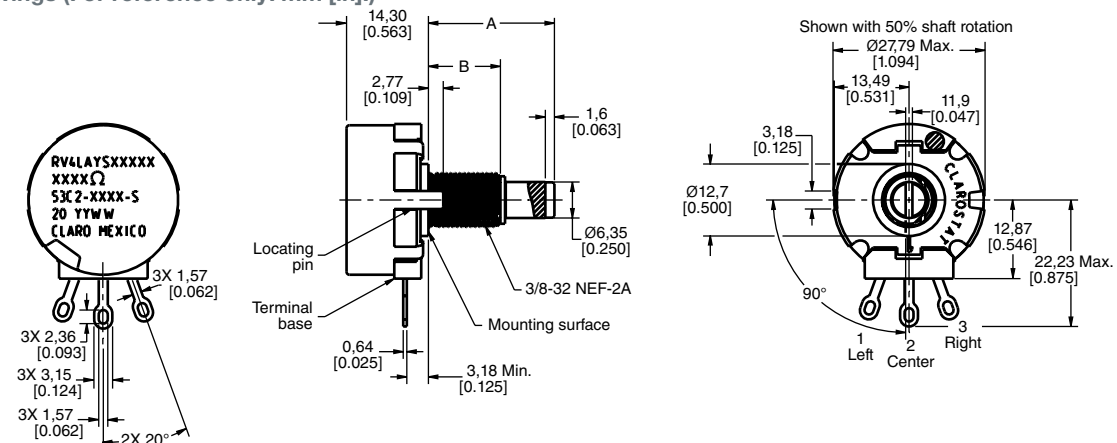

# 53C Series Order Guide

Table 53C3 Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions                  |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Shaft Length (mm [in]) | B<br>Bushing Length (mm [in]) |                |                   |
| 53C3100         | 100              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C3100K        | 100 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C310K         | 10 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C3150         | 150              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C31500        | 1.5 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C3150K        | 150 K            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C315K         | 15 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C31K          | 1 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C31K/NEW      | 1 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C31MEG        | 1 M              | 10                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C32.5MEG      | 2.5 M            | 20                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C3200K        | 200 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C320K         | 20 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C3250         | 250              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C32500        | 2.5 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C3250K        | 250 k            | 10                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C325K         | 25 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C32K          | 2 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C32MEG        | 2 M              | 20                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C3350         | 350              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C33500        | 3.5 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C350          | 50               | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C3500         | 500              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C3500K        | 500 k            | 10                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C3500K/NEW    | 500 k            | 10                        | 10                               | 10                                | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C350K         | 50 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |


(Continued on next page.)

# 53C Series Order Guide

Table 53C3 Order Guide (continued)









| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions                  |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Shaft Length (mm [in]) | B<br>Bushing Length (mm [in]) |                |                   |
| 53C35K          | 5 k              | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C35MEG        | 5 M              | 20                               | 10                               | 10                                | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C3750K        | 750 k            | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 53C375K         | 75 k             | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | no         | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

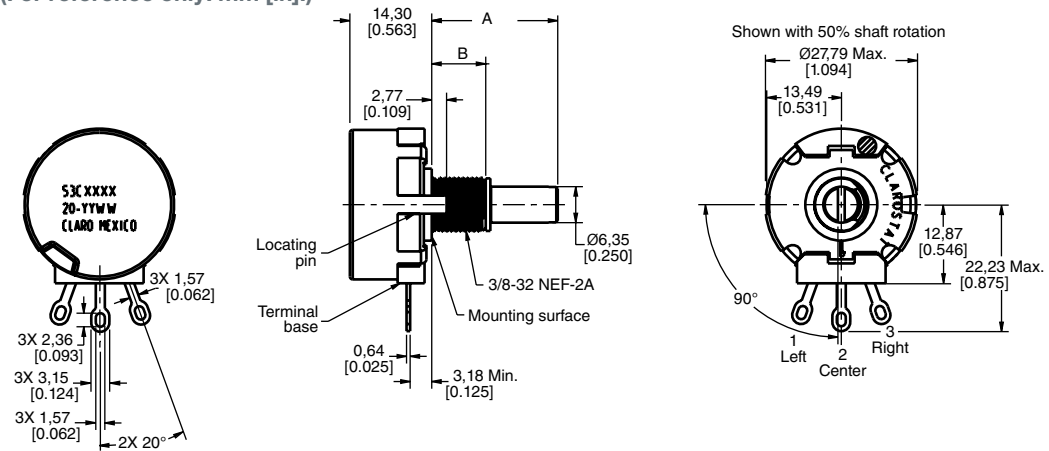

# 385 Series Specific Configurations





Table 9. 385 Series Specific Configurations
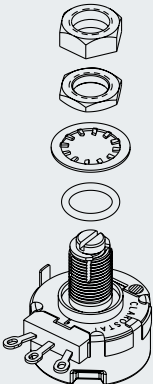
| Shaft Type                        | Bushing Type                    | AR Pin  | Termination | Configuration with Associated Hardware                                              | Shaft Type                        | Bushing Type                    | AR Pin | Termination | Configuration with Associated Hardware                                                |
|-----------------------------------|---------------------------------|---------|-------------|-------------------------------------------------------------------------------------|-----------------------------------|---------------------------------|--------|-------------|---------------------------------------------------------------------------------------|
| 385-A (See Table 385-A on p. 40.) |                                 |         |             |    | 385-B (See Table 385-B on p. 40.) |                                 |        |             |    |
| flatted                           | standard, 9,53 mm [0.375 in]    | 1       | solder lug  |                                                                                     | round                             | standard, 9,53 mm [0.375 in]    | 1      | solder lug  |                                                                                       |
| 385-C (See Table 385-C on p. 41.) |                                 |         |             |   | 385-D (See Table 385-D on p. 41.) |                                 |        |             |   |
| flatted                           | standard, 9,53 mm [0.375 in]    | 1 and 2 | solder lug  |                                                                                     | slotted                           | standard, 9,53 mm [0.375 in]    | 1      | solder lug  |                                                                                       |
| 385-E (See Table 385-E on p. 42.) |                                 |         |             |  | 385-F (See Table 385-F on p. 42.) |                                 |        |             |  |
| slotted                           | high torque, 12,7 mm [0.500 in] | 1       | solder lug  |                                                                                     | slotted                           | high torque, 12,7 mm [0.500 in] | 1      | solder lug  |                                                                                       |
| 385-G (See Table 385-G on p. 43.) |                                 |         |             |  | 385-H (See Table 385-H on p. 43.) |                                 |        |             |  |
| slotted                           | high torque, 12,7 mm [0.500 in] | 1       | solder lug  |                                                                                     | slotted                           | standard, 9,53 mm [0.375 in]    | 1      | solder lug  |                                                                                       |



# 385 Series Specific Configurations

Table 9. 385 Series Specific Configurations (continued)

| Shaft Type                        | Bushing Type                 | AR Pin | Termination | Configuration with Associated Hardware                                             | Shaft Type                        | Bushing Type                 | AR Pin | Termination | Configuration with Associated Hardware                                               |
|-----------------------------------|------------------------------|--------|-------------|------------------------------------------------------------------------------------|-----------------------------------|------------------------------|--------|-------------|--------------------------------------------------------------------------------------|
| 385-I (See Table 385-I on p. 44.) |                              |        |             |   | 385-J (See Table 385-J on p. 45.) |                              |        |             |   |
| slotted                           | standard, 9,53 mm [0.375 in] | 1      | solder lug  |                                                                                    | slotted                           | standard, 9,53 mm [0.375 in] | 1      | solder lug  |                                                                                      |
| 385-K (See Table 385-K on p. 45.) |                              |        |             |  | 385-L (See Table 385-L on p. 46.) |                              |        |             |  |
| slotted                           | standard, 9,53 mm [0.375 in] | 1      | solder lug  |                                                                                    | slotted                           | standard, 9,53 mm [0.375 in] | 1      | solder lug  |                                                                                      |

# 385 Series Order Guides

Table 385-A Order Guide

| Catalog Listing | Electrical       |                          |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions                 |                               |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|--------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|----------------------------|-------------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Flat Length (mm [in]) | B<br>Flat Thickness (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 385000M5783     | 10 k             | 10                       | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 12,27 [0.483]              | 5,53 [0.218]                  | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |
| 385000M9136     | 5 k              | 10                       | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 9,53 [0.375]               | 3,96 [0.156]                  | 22,23 [0.875]               | 9,53 [0.375]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)


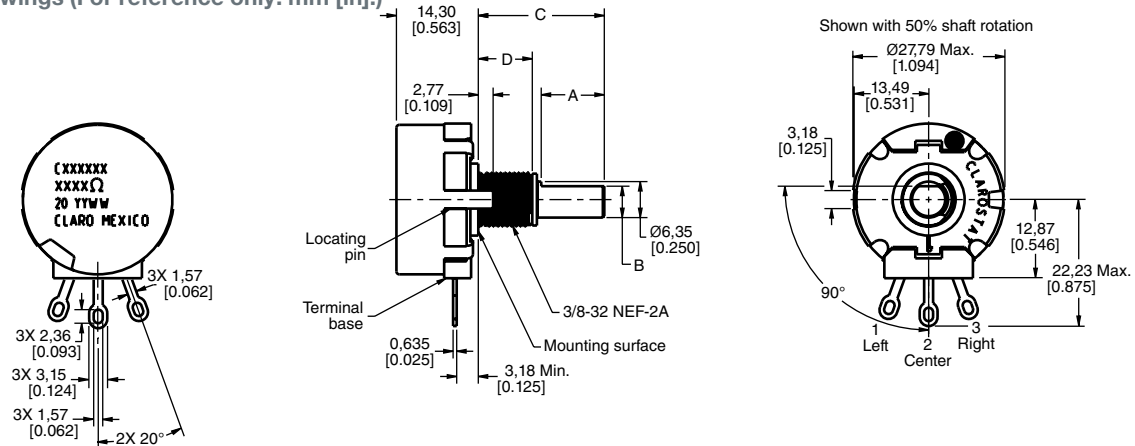


Table 385-B Order Guide

| Catalog Listing | Electrical       |                          |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions                 |                               |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|--------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|----------------------------|-------------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Flat Length (mm [in]) | B<br>Flat Thickness (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 385500M0012     | 100 k            | 10                       | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 9,53 [0.375]               | 5,53 [0.218]                  | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 385500M4863     | 1 k              | 10                       | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 9,53 [0.375]               | 5,53 [0.218]                  | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |
| 385500M5694     | 5 k              | 10                       | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 9,53 [0.375]               | 5,53 [0.218]                  | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

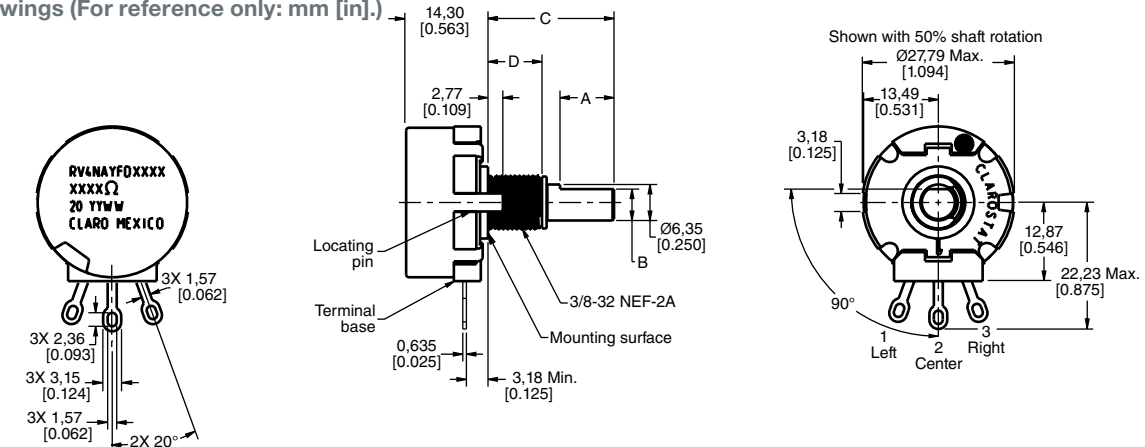

# 385 Series Order Guides

Table 385-C Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions                  |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Shaft Length (mm [in]) | B<br>Bushing Length (mm [in]) |                |                   |
| 385000M8551     | 150              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 19,05 [0.750]               | 9,53 [0.375]                  | yes            | unassembled       |
| 385000M9168     | 100              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 19,05 [0.750]               | 9,53 [0.375]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)


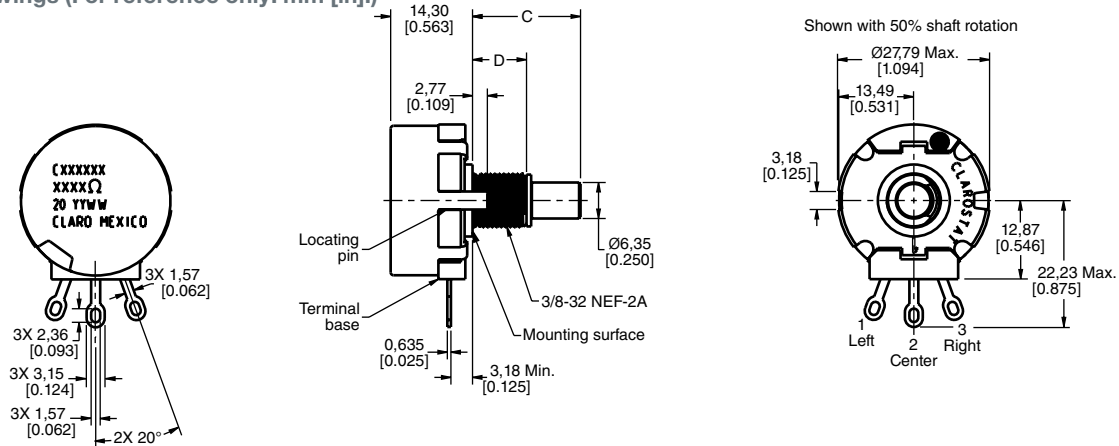


Table 385-D Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions                  |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Shaft Length (mm [in]) | B<br>Bushing Length (mm [in]) |                |                   |
| 385000M8659     | 10 k             | 10                        | 100                              | 4                                 | 274                                          | 312                              | Z     | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 25,4 [1.000]                | 9,53 [0.375]                  | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

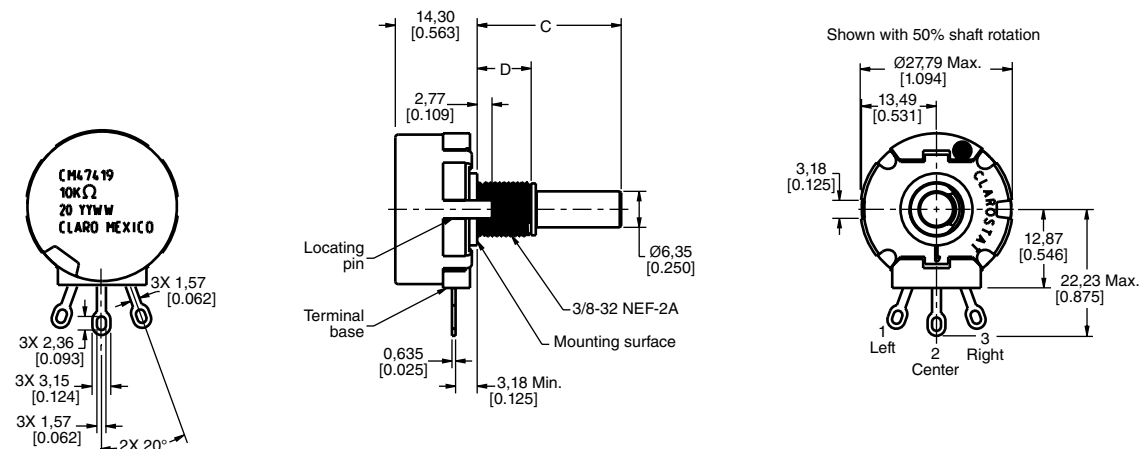

# 385 Series Order Guides

Table 385-E Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions              |                            |                          |                            | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-------------------------|----------------------------|--------------------------|----------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A Slot Length (mm [in]) | B Slot Thickness (mm [in]) | C Shaft Length (mm [in]) | D Bushing Length (mm [in]) |                |                   |
| 385500M9303     | 75               | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]            | 1,19 [0.047]               | 15,88 [0.625]            | 12,7 [0.500]               | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)


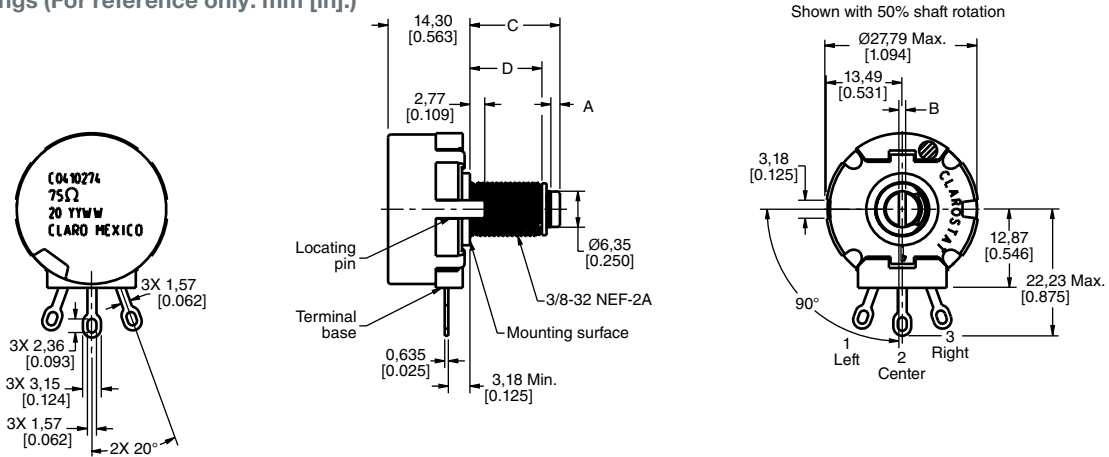


Table 385-F Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions              |                            |                          |                            | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-------------------------|----------------------------|--------------------------|----------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A Slot Length (mm [in]) | B Slot Thickness (mm [in]) | C Shaft Length (mm [in]) | D Bushing Length (mm [in]) |                |                   |
| 385500M1654     | 200              | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]            | 1,19 [0.047]               | 15,88 [0.625]            | 12,7 [0.500]               | no             | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

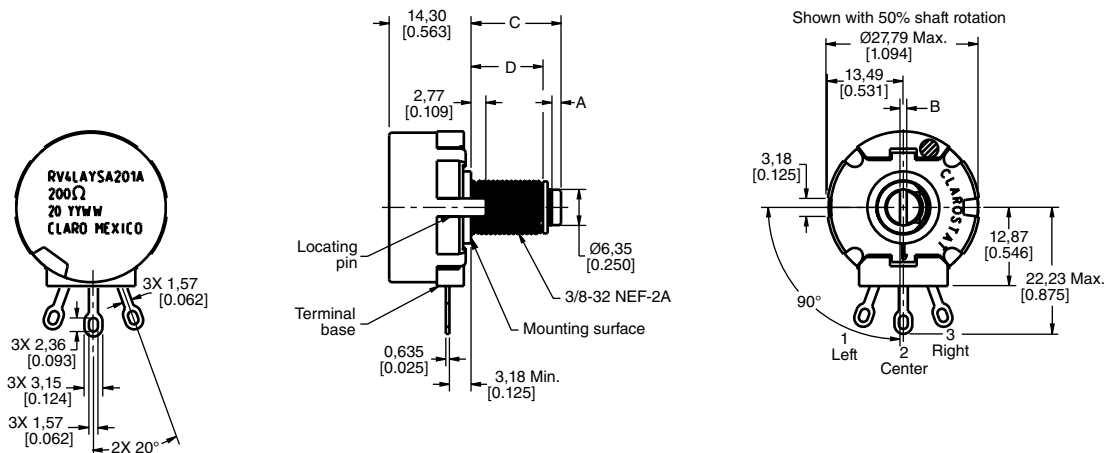

# 385 Series Order Guides

Table 385-G Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions              |                            |                          |                            | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-------------------------|----------------------------|--------------------------|----------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A Slot Length (mm [in]) | B Slot Thickness (mm [in]) | C Shaft Length (mm [in]) | D Bushing Length (mm [in]) |                |                   |
| 385518M0018     | 5 k              | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-6 [7-42]                      | 24 [2.8]                  | yes        | 1,60 [0.063]            | 1,19 [0.047]               | 15,88 [0.625]            | 12,7 [0.500]               | no             | unassembled       |

Dimensional Drawings (For reference only: mm [in].)


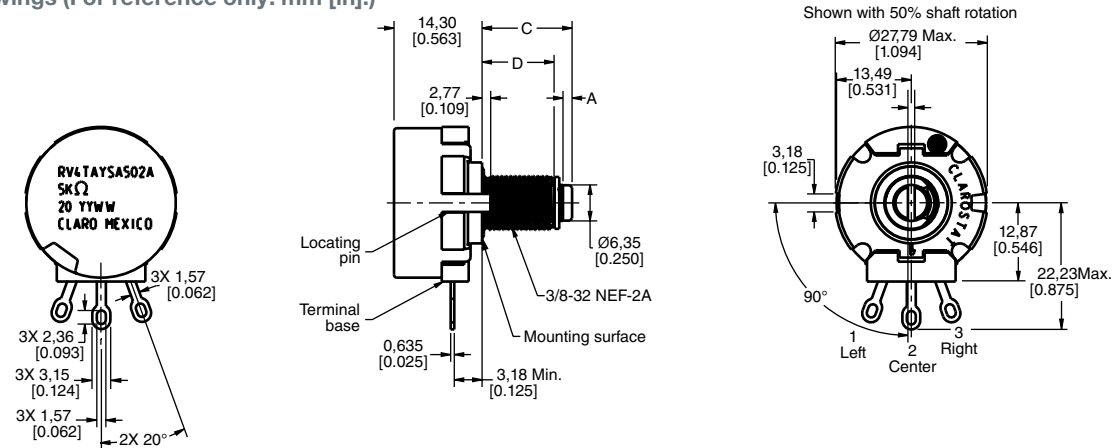


Table 385-H Order Guide

| Catalog Listing | Electrical       |                                  |                                  |                                   |                                              |                                       |       | Mechanical                   |                                 |                           |            | Dimensions              |                            |                          |                            | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------------------|---------------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-------------------------|----------------------------|--------------------------|----------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance ( $\pm\%$ ) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, $\pm 3$ (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A Slot Length (mm [in]) | B Slot Thickness (mm [in]) | C Shaft Length (mm [in]) | D Bushing Length (mm [in]) |                |                   |
| 385000M1495     | 5 M              | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]            | 1,19 [0.047]               | 15,88 [0.625]            | 9,53 [0.375]               | yes            | unassembled       |
| 385000M6960     | 270              | 10                               | 4                                | 4                                 | 274                                          | 312                                   | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]            | 1,19 [0.047]               | 22,23 [0.875]            | 9,53 [0.375]               | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

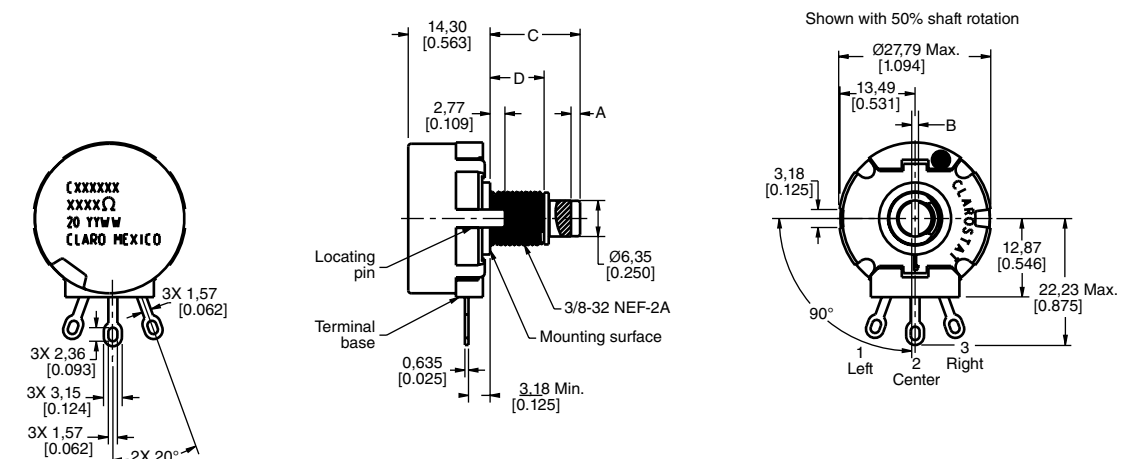


# 385 Series Order Guides

Table 385-I Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions              |                            |                          |                            | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-------------------------|----------------------------|--------------------------|----------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A Slot Length (mm [in]) | B Slot Thickness (mm [in]) | C Shaft Length (mm [in]) | D Bushing Length (mm [in]) |                |                   |
| 385500M0297     | 10 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]            | 1,19 [0.047]               | 22,23 [0.875]            | 9,53 [0.375]               | no             | unassembled       |
| 385500M0567     | 1 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]            | 1,19 [0.047]               | 22,23 [0.875]            | 9,53 [0.375]               | no             | unassembled       |
| 385500M0563     | 1 k              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]            | 1,19 [0.047]               | 31,75 [1.25]             | 9,53 [0.375]               | no             | unassembled       |
| 385500M1231     | 200              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]            | 1,19 [0.047]               | 22,23 [0.875]            | 9,53 [0.375]               | no             | unassembled       |
| 385500M1377     | 500              | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]            | 1,19 [0.047]               | 22,23 [0.875]            | 9,53 [0.375]               | no             | unassembled       |

## Dimensional Drawings (For reference only: mm [in].)

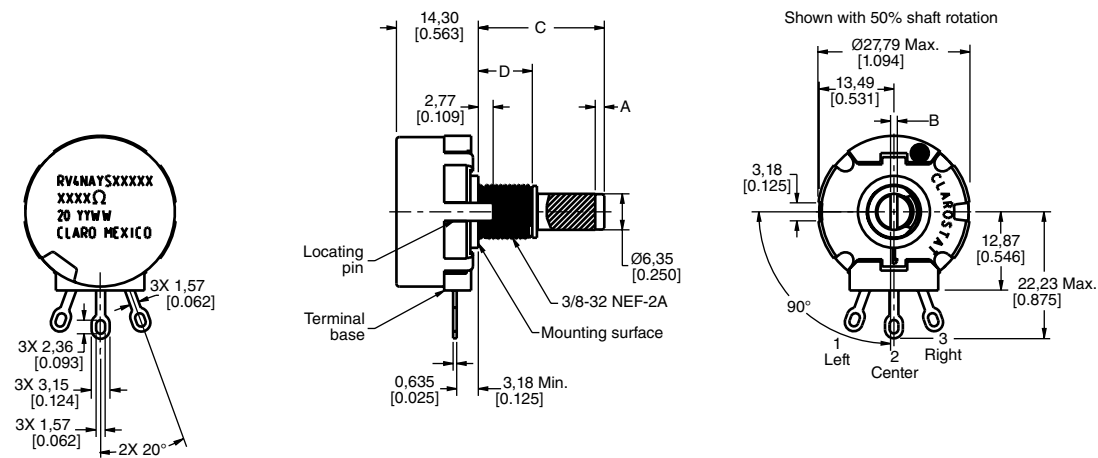

# 385 Series Order Guides

Table 385-J Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions              |                            |                          |                            | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-------------------------|----------------------------|--------------------------|----------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A Slot Length (mm [in]) | B Slot Thickness (mm [in]) | C Shaft Length (mm [in]) | D Bushing Length (mm [in]) |                |                   |
| 385518M0106     | 10 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 1,60 [0.063]            | 1,19 [0.047]               | 12,7 [0.500]             | 9,53 [0.375]               | no             | unassembled       |
| 385518M0869     | 2.5 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 1,60 [0.063]            | 1,19 [0.047]               | 22,23 [0.875]            | 9,53 [0.375]               | no             | unassembled       |
| 385518M1309     | 2.5 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 1,60 [0.063]            | 1,19 [0.047]               | 12,7 [0.500]             | 9,53 [0.375]               | no             | unassembled       |
| 385518M1813     | 10 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 1,60 [0.063]            | 1,19 [0.047]               | 22,23 [0.875]            | 9,53 [0.375]               | no             | unassembled       |
| 385518M2059     | 50 k             | 10                        | 4                                | 4                                 | 274                                          | 312                              | S-4   | 312                          | 1-6 [7-42]                      | 12 [1.4]                  | yes        | 1,60 [0.063]            | 1,19 [0.047]               | 12,7 [0.500]             | 9,53 [0.375]               | no             | unassembled       |

Dimensional Drawings (For reference only: mm [in].)


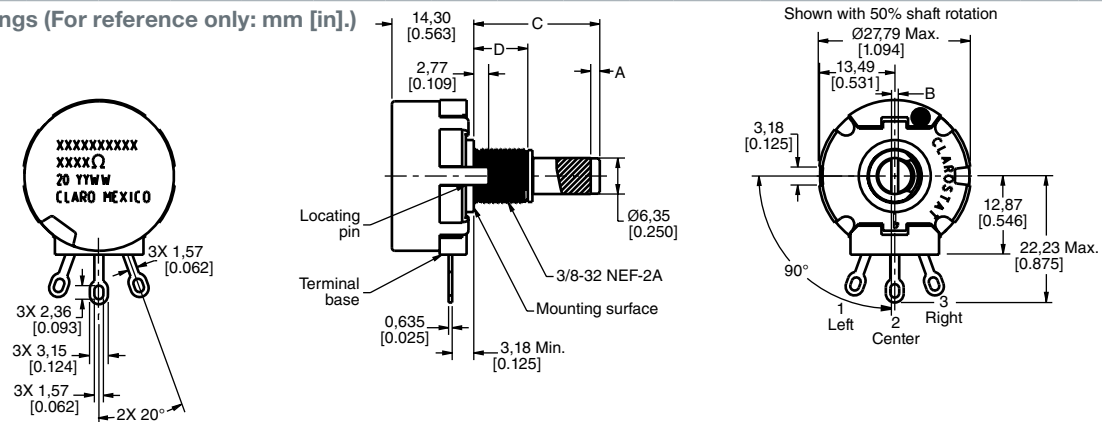


Table 385-K Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions              |                            |                          |                            | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|-------------------------|----------------------------|--------------------------|----------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A Slot Length (mm [in]) | B Slot Thickness (mm [in]) | C Shaft Length (mm [in]) | D Bushing Length (mm [in]) |                |                   |
| 385000M8686     | 100 k            | 10                        | 4                                | 4                                 | 274                                          | 312                              | Z     | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]            | 1,19 [0.047]               | 22,23 [0.875]            | 9,53 [0.375]               | yes            | unassembled       |
| 385500M9553     | 1 M              | 20                        | 10 k                             | 10                                | 274                                          | 312                              | Z     | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]            | 1,19 [0.047]               | 22,23 [0.875]            | 9,53 [0.375]               | yes            | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

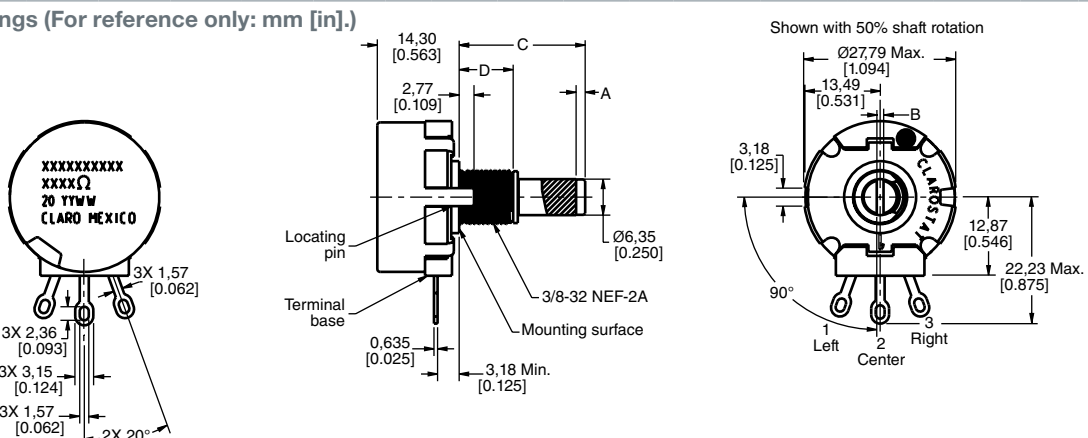


# 385 Series Order Guides

Table 385-L Order Guide

| Catalog Listing | Electrical       |                           |                                  |                                   |                                              |                                  |       | Mechanical                   |                                 |                           |            | Dimensions                 |                               |                             |                               | RoHS Compliant | Mounting Hardware |
|-----------------|------------------|---------------------------|----------------------------------|-----------------------------------|----------------------------------------------|----------------------------------|-------|------------------------------|---------------------------------|---------------------------|------------|----------------------------|-------------------------------|-----------------------------|-------------------------------|----------------|-------------------|
|                 | Resistance (Ohm) | Resistance Tolerance (±%) | End Resistance at CW, Max. (Ohm) | End Resistance at CCW, Max. (Ohm) | Effective Electrical Rotation, Typ. (Degree) | Electrical Rotation, ±3 (Degree) | Taper | Mechanical Rotation (Degree) | Operating Torque (mN m [in-oz]) | Stop Torque (N m [in-lb]) | Shaft Seal | A<br>Slot Length (mm [in]) | B<br>Slot Thickness (mm [in]) | C<br>Shaft Length (mm [in]) | D<br>Bushing Length (mm [in]) |                |                   |
| 385500M1246     | 250 k            | 10                        | 2.5 k                            | 10                                | 274                                          | 312                              | Z     | 312                          | 1-4 [7-28]                      | 12 [1.4]                  | no         | 1,60 [0.063]               | 1,19 [0.047]                  | 22,23 [0.875]               | 9,53 [0.375]                  | no             | unassembled       |

Dimensional Drawings (For reference only: mm [in].)

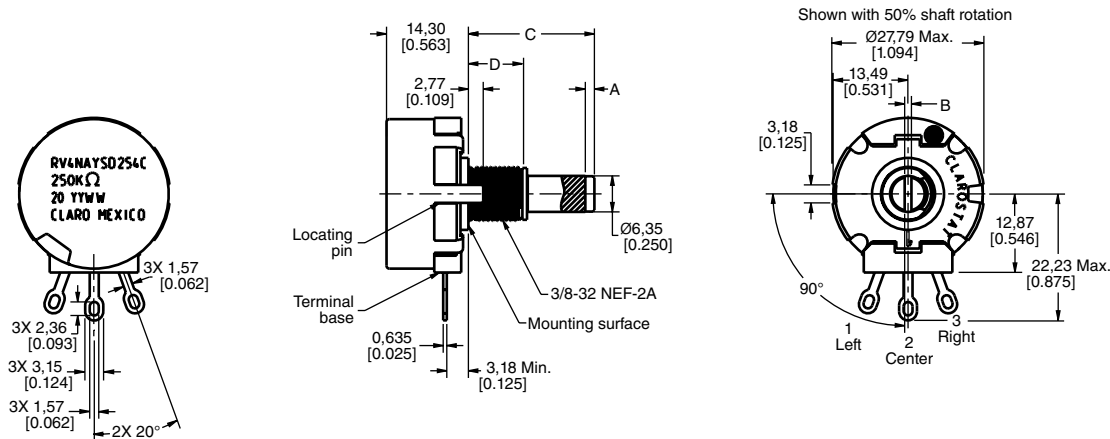



THIS PAGE INTENTIONALLY LEFT BLANK.

## ADDITIONAL INFORMATION

The following associated literature is available at [sensing.honeywell.com](http://sensing.honeywell.com):

- Product Range Guide
- Product Line Guide
- Installation Instructions

### Find out more

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office.

To learn more about Honeywell Sensing and Productivity Solutions' products, call **+1-815-235-6847** or **1-800-537-6945**, visit **[sensing.honeywell.com](http://sensing.honeywell.com)**, or e-mail inquiries to **[info.sc@honeywell.com](mailto:info.sc@honeywell.com)**

Sensing and Productivity Solutions  
Honeywell  
1985 Douglas Drive North  
Golden Valley, MN 55422  
**[honeywell.com](http://honeywell.com)**

## WARNING

### PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

## WARNING

### MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

## WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell website, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

# Honeywell

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Honeywell:

[380C31000](#) [53C1500K](#) [53C25K](#) [53C320K](#) [RV4LAYS A153A](#) [RV4LAYS A255B](#) [RV4LAYS A505B](#) [RV4NAYS B101A](#)  
[RV4NAYS B103A](#) [RV4NAYS B503A](#) [RV4NAYS D753A](#) [RV4NAYS D754A](#) [RV4NAYS K103A](#) [RV4NAYS K502A](#)  
[RV4LAYS D103A](#) [RV4LAYS D102A](#) [RV4LAYS D502A](#) [RV4NAYS D104A](#) [RV4SAYS D502A](#) [RV4NAYS D501A](#)  
[RV4LAYS D504A](#) [53C23.5MEG](#) [53C1500KZ](#) [C0401196](#) [RV4NBYS D503A](#) [RV4NAYS D103A](#) [RV4NAYS D102A](#)  
[RV4LAYS A353A](#) [RV4NAYS D503D](#) [RV4NAYS D352A](#) [RV4SAYS D252A](#) [RV8NAYS B104A](#)