
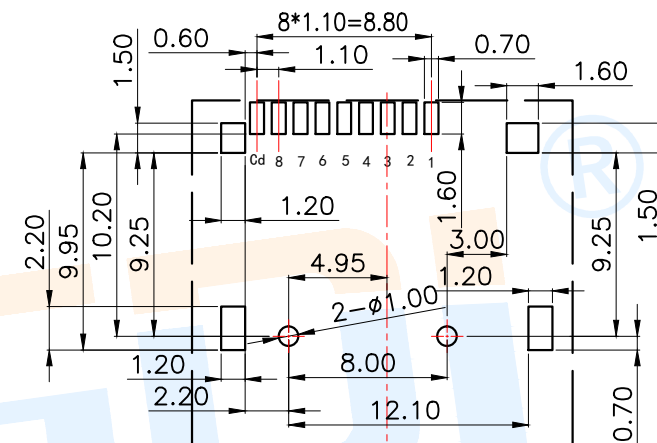
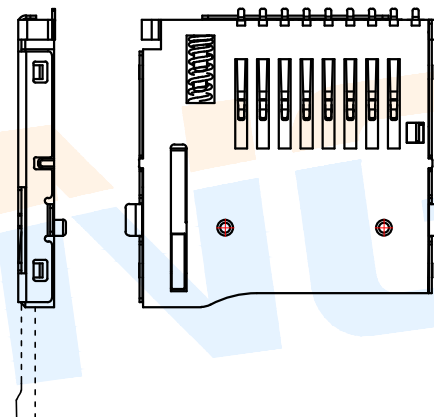


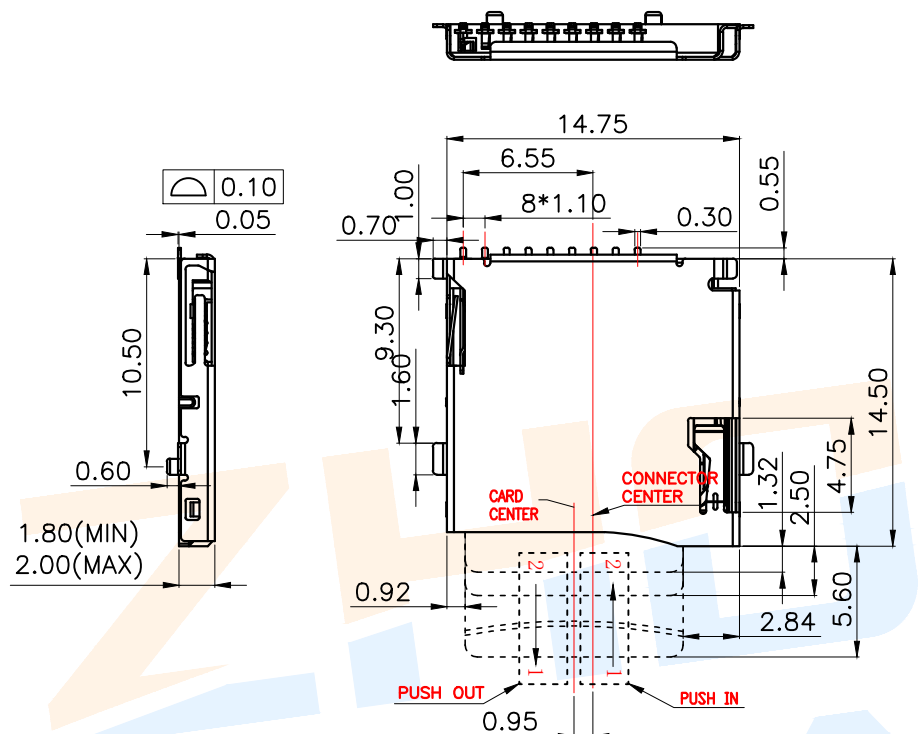

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: ± 0.05)

Specifications/技术规格:

- 1.Current rating/ 额定电流: 0.5A
- 2.Voltage rating/ 额定电压: 100V DC
- 3.Insulation Resistance/ 绝缘电阻: 100MΩ Min
- 4.Dielectric Withstanding/ 耐电压: 500V AC/minute
- 5.Contact Resistance/ 接触电阻: 40mΩ Max
- 6.Durability/ 耐久性: 5,000 Insertions
- 7.Operating Temperature/ 工作温度: -40℃ to +85℃

PIN NO.	NAME	YYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DATO	I/O/PP	DATE LINE(BITO)
8	DAT1	I/O/PP	DATE LINE(DIT1)
9	CD	CD	CD

Ⓒ	Spring		1	SUS	Nature
Ⓒ	Terminal		9	Phosphor bronze	Au Plating
Ⓑ	Cover			SUS	Ni Plating
Ⓐ	Housing		1	LCP	Black
NO.	Name	Number	Qty	Materil	Remarks

ZHONGDI® Zhongdi Electronic Technology Co., Ltd

design		date		name	TF CARD CONNECTOR
Review		date			
Approved		date			
number:				model	TF-001-P
or 1:1	unit	mm	gate number	A4	