



BUTTON CONTACT

Button contacts for lamp sockets and fuse holders

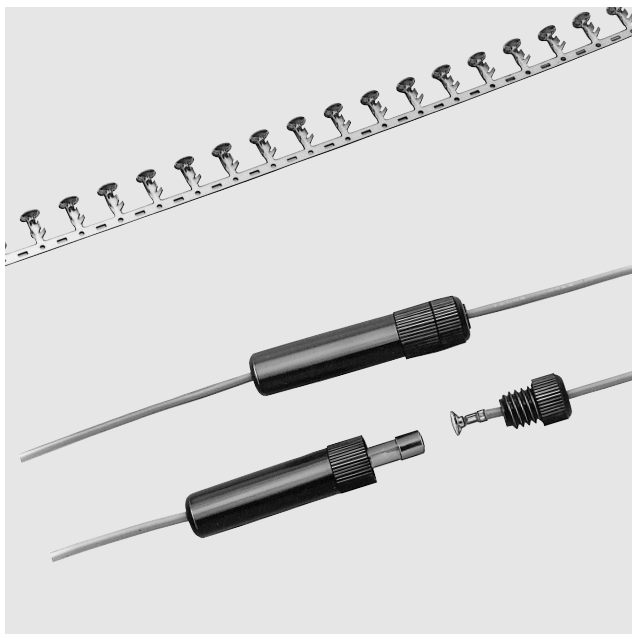


This button terminal is used as a contact interface for lamp sockets and fuse holders in automobiles. Products using this contact are far more reliable and easier to use than conventional products that use solder connections.


Shape A



Shape B



Shape C



Model No.	Applicable wire			Shape	Finish	Q'ty / reel	
	mm²	AWG #	Insulation O.D. (mm)				
SBT-31-001	0.5 to 0.85	20 to 18	2.1 to 3.0	A	—	7,500	
SBT-31T-001					Tin-plated		
SBT-31-002				B	—	10,000	
SBT-31T-002					Tin-plated (reflow treatment)		
SBT-31-003				C	—		
SBT-31T-003					Tin-plated		
Material							
Brass							

RoHS compliance

Note: The SBT-31(T)-003 has a dent at the end to increase the area that contacts the mating fuse. The SBT-31(T)-002 does not have such a dent.

Crimping machine, Applicator

Contact	Crimping machine	Crimp applicator	Dies	Crimp applicator with dies
SBT-31(T)-001	AP-K2N	MKS-L	MK/SBT-31-001	APLMK SBT31-001
SBT-31(T)-002		MKS-L	MK/SBT-31-002	APLMK SBT31-002
SBT-31(T)-003				

- * Compliant with RoHS.
- * Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.
- * Contact JST for details.