


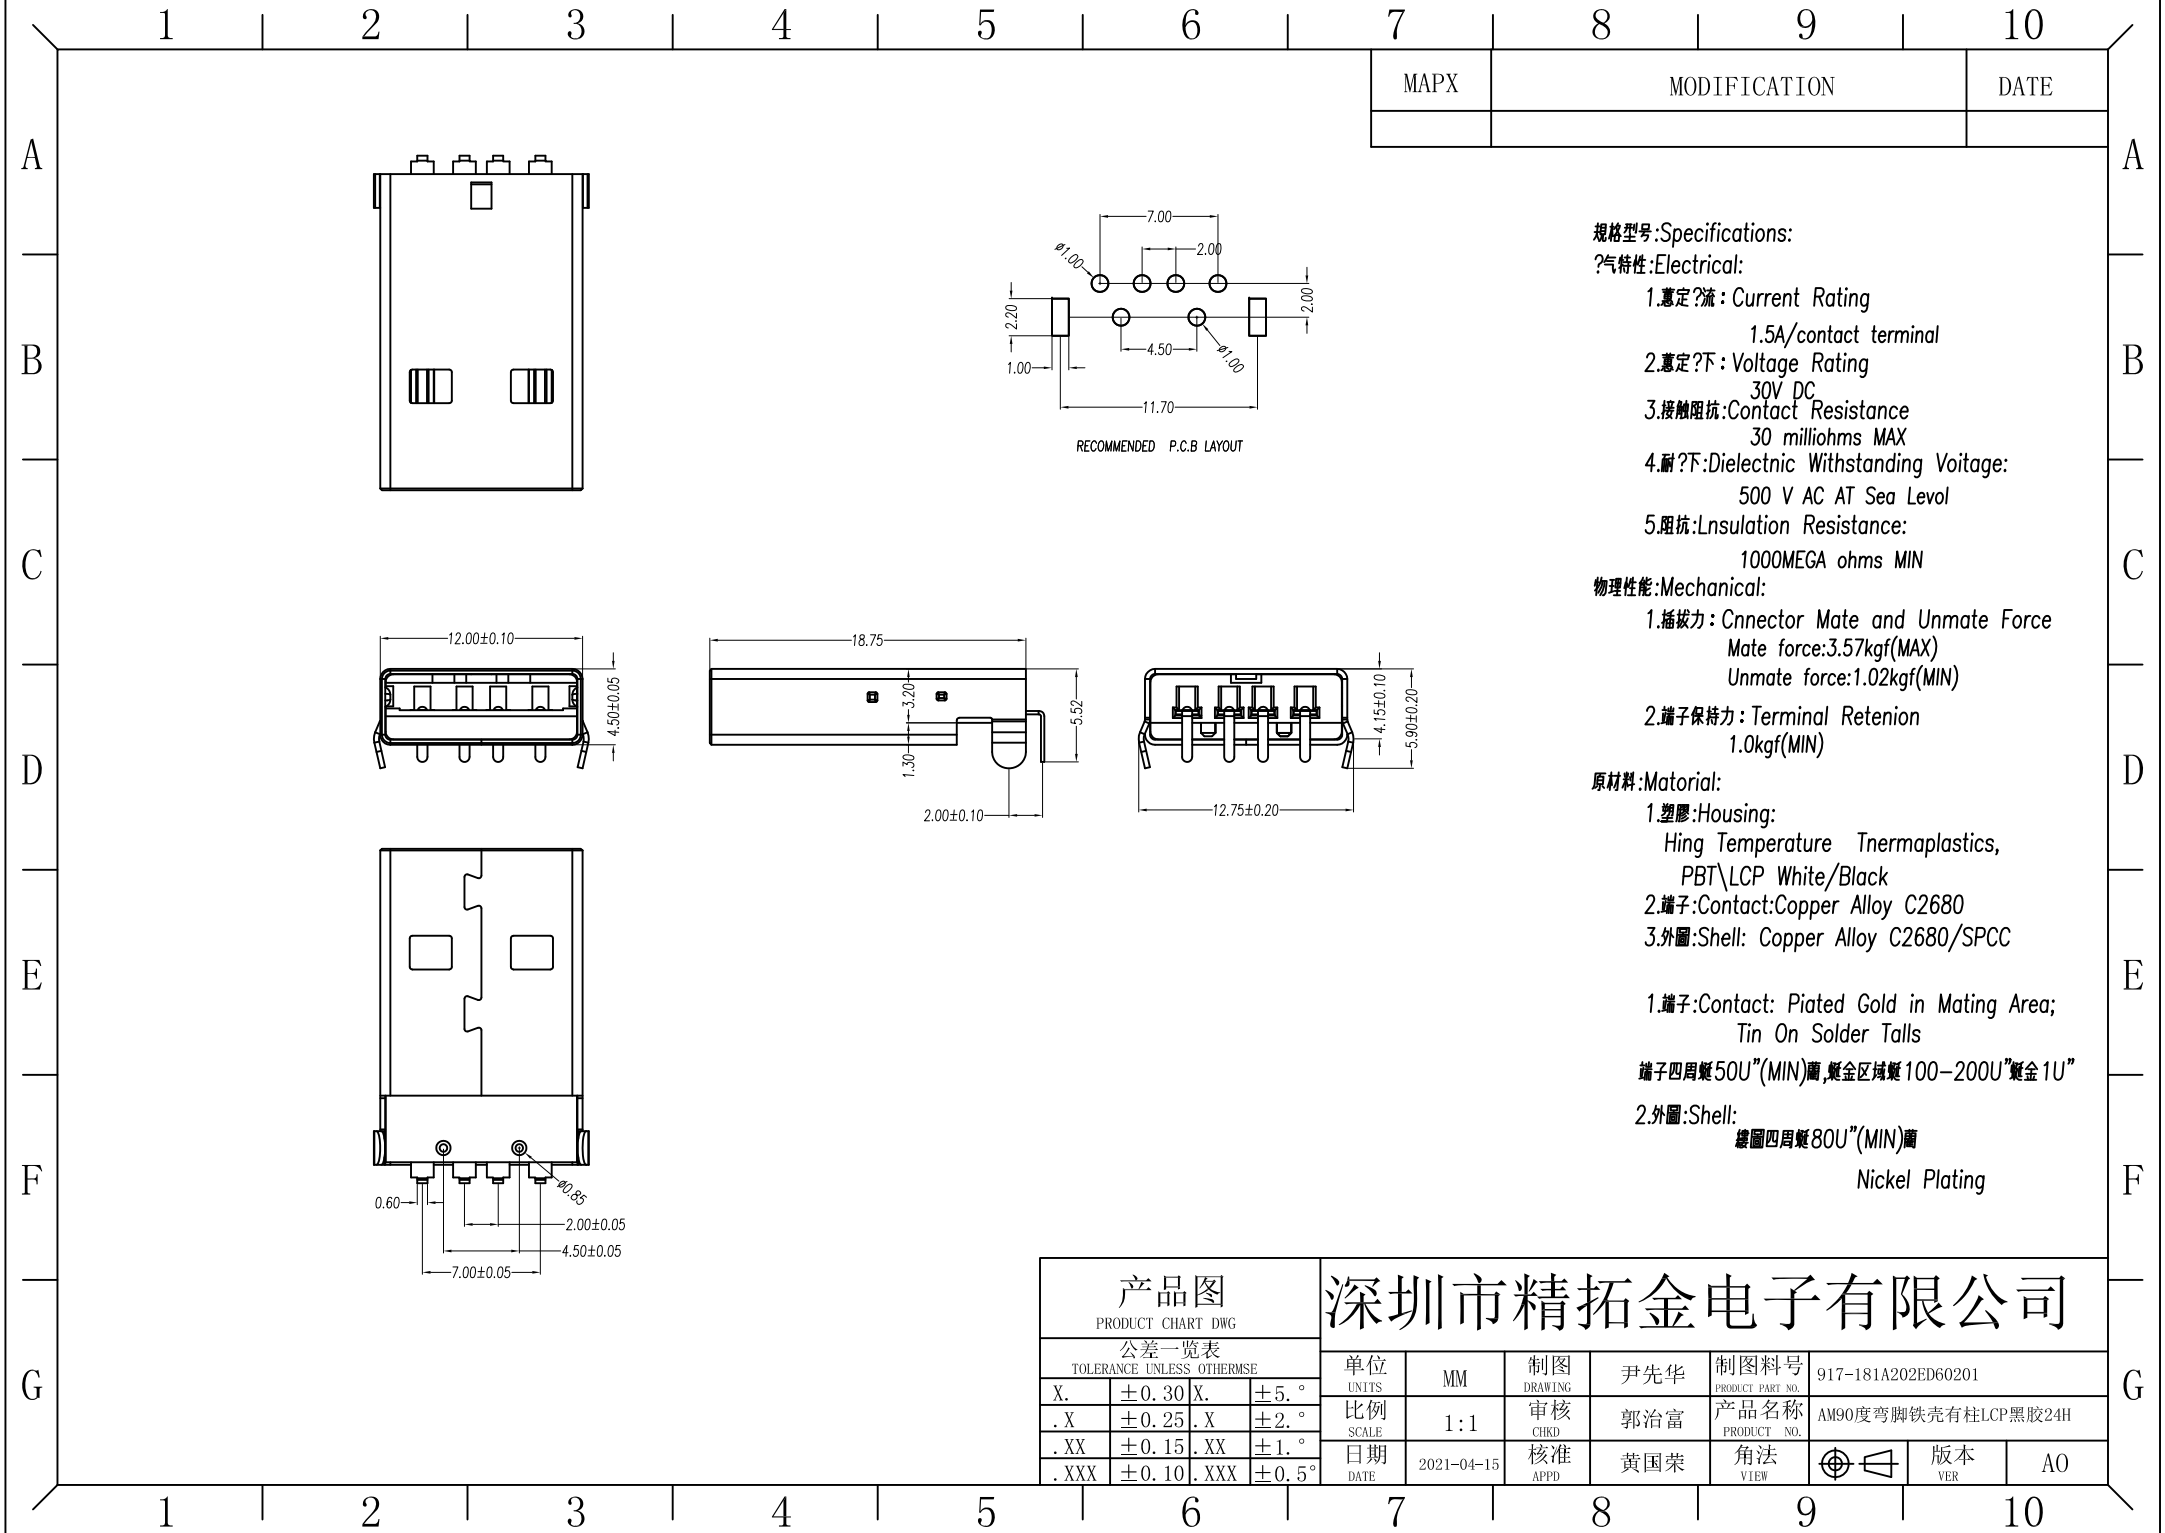

MAPX	MODIFICATION	DATE

规格型号:Specifications:
电气特性:Electrical:
1.额定电流: Current Rating
1.5A/contact terminal
2.额定电压: Voltage Rating
30V DC
3.接触阻抗:Contact Resistance
30 milliohms MAX
4.耐电压:Dielectric Withstanding Voitage:
500 V AC AT Sea Level
5.阻抗:Insulation Resistance:
1000MEGA ohms MIN
物理性能:Mechanical:
1.插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
2.端子保持力: Terminal Retenion
1.0kgf(MIN)
原材料:Material:
1.塑膠:Housing:
Hing Temperature Tnermaplastics,
PBT\LCP White/Black
2.端子:Contact:Copper Alloy C2680
3.外圈:Shell: Copper Alloy C2680/SPCC
1.端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
端子四周镀50U”(MIN)黄,镀金区域镀100-200U”镀金1U”
2.外圈:Shell:
镀圈四周镀80U”(MIN)黄
Nickel Plating

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司						
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	917-181A202ED60201	
X.	±0.30	X.	±5.°	比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AM90度弯脚铁壳有柱LCP黑胶24H	
.XX	±0.15	.XX	±1.°	日期 DATE	2021-04-15	核准 APPD	黄国荣	角法 VIEW		版本 VER
.XXX	±0.10	.XXX	±0.5°							AO