
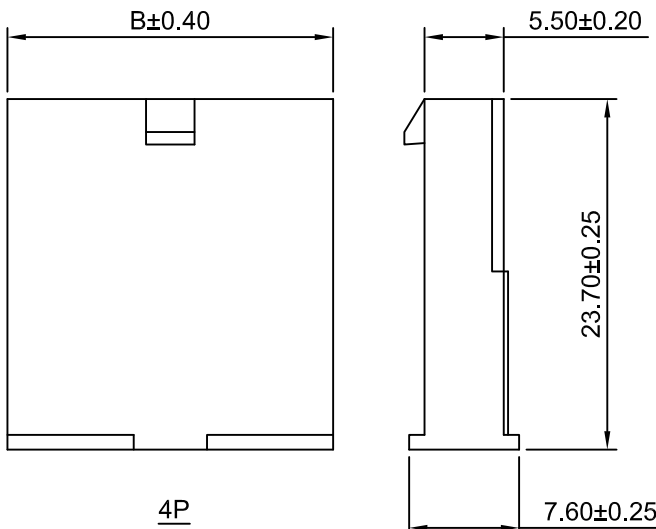
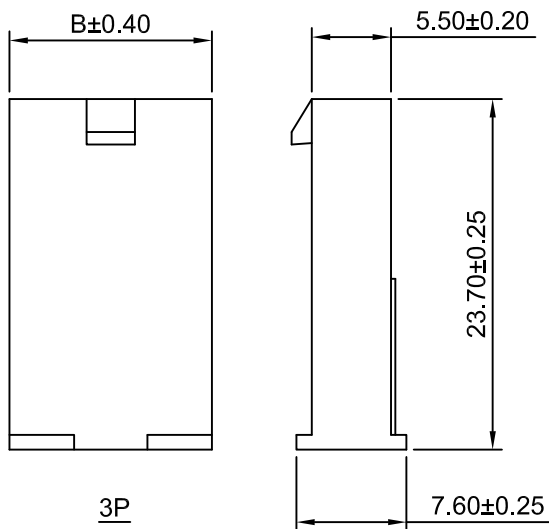





Ordering Information:

C4201HMA-XP - ** - **
1 2 3

1.Part NO.

2.Material:

(Blank):Nylon 66 UL94V-2(Natural)

V0:Nylon 66 UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(Blank):see section 2 material


BK:Black

RD:Red

YL:Yellow

BL:Blue

GN:Green

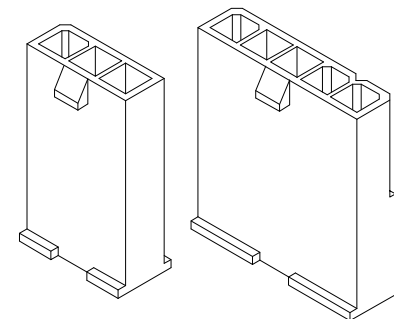

SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)(Maximum current up to 13A when using the C4201M-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute


Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	4.20	9.60	8P	29.40	34.80
3P	8.40	13.80	9P	33.60	39.00
4P	12.60	18.00	10P	37.80	43.20
5P	16.80	22.20	11P	42.00	47.40
6P	21.00	26.40	12P	46.20	51.60
7P	25.20	30.60			


CJTconn

CHANGJIANG CONNECTORS CO.,LTD.


Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 2	4.20mm PITCH SINGLE ROW HOUSING		
DRAWN	CHK'D	APPR			
Haisen Li	Dianhui Wan	Jack Yin	DRAWING NO.		
General Tolerances			THIRD ANGLE PROJECTION		
A4	JL-GC-ECN00348	2024.08.27	C4201HMA-XP		
A3	CHANGE THE DRAWING	2023.01.18			
A2	DELETE THE SIZE OF 7P~12P	2019.10.21			
A1	Change version	2018.01.25			
A0	NEW RELEASE	2005.05.10	REV		
REV	DESCRIPTION	DATE	A4		




2P




3P

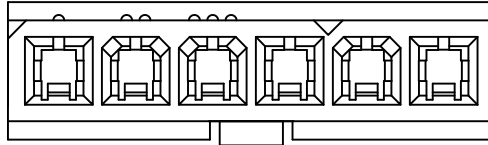

6P



4P

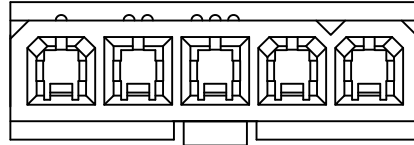

5P

A0	NEW RELEASE	2024.08.27
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE 4.20mm PITCH SINGIE ROW HOUSING DRAWING NO. C4201HMA-XP
mm	2.5:1	2 of 2	
DRAWN	CHK'D	APPR'D	
Haisen Li	Djankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	REV A0
x,x±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			