

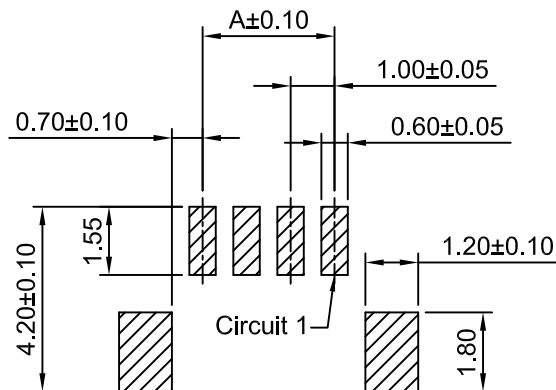
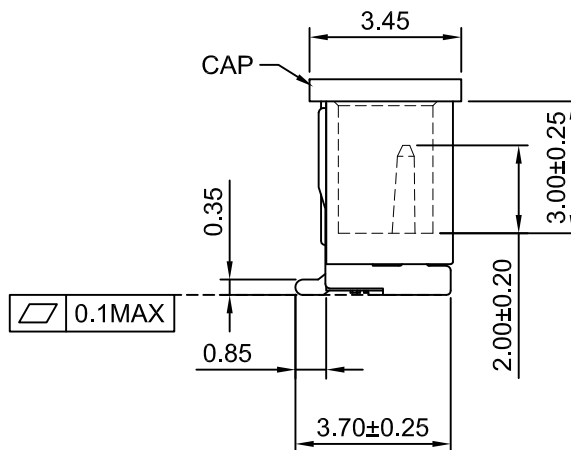
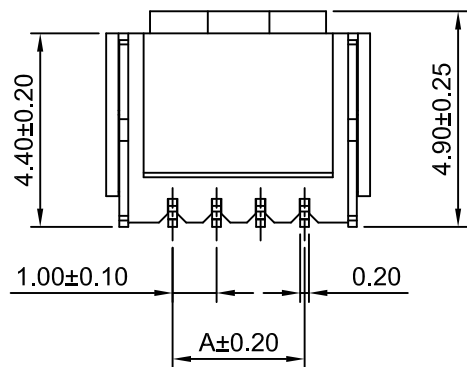



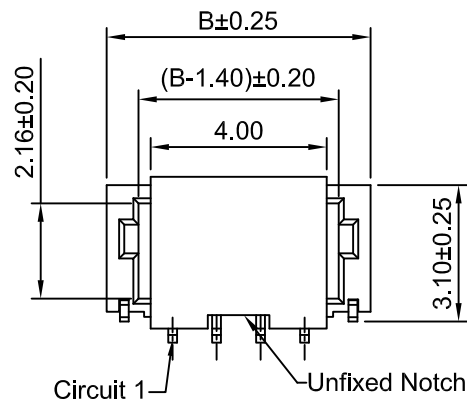

P.C.B LAYOUT

Ordering Information:
A1002WV-S-XP-LCP - ***
1 2

1.Part NO.
2.Finish:
(Blank): Tin over Nickel
G: Gold over Nickel



SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Solder Tabs: Phosphor Bronze/Tin over Nickel
Material: LCP,UL94V-0(Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.00	4.00	12P	11.00	14.00
3P	2.00	5.00	13P	12.00	15.00
4P	3.00	6.00	14P	13.00	16.00
5P	4.00	7.00	15P	14.00	17.00
6P	5.00	8.00	16P	15.00	18.00
7P	6.00	9.00	17P	16.00	19.00
8P	7.00	10.00	18P	17.00	20.00
9P	8.00	11.00	19P	18.00	21.00
10P	9.00	12.00	20P	19.00	22.00
11P	10.00	13.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A4	CHANGE THE DRAWING	2023.01.05
A3	CHANGE THE DRAWING	2022.11.11
A2	CHANGE THE DRAWING	2022.05.27
A1	CHANGE THE DRAW NO.&INFORMATION	2019.05.23
A0	NEW RELEASE	2021.03.15
REV	DESCRIPTION	DATE

Unit	Scale	Sheet
mm	6:1	1 of 1
DRAWN	CHKD	APPR
Chengbiao Ye	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x.x±0.25 x.xx±0.20 x.xxx±0.15		
ANGLES ±1°		

TITLE		
1.00mm PITCH VERTICAL WAFER - SMD TYPE		
DRAWING NO.		REV
A1002WV-S-XP-LCP		A4