




Connectors > PCB Connectors > PCB Headers & Receptacles

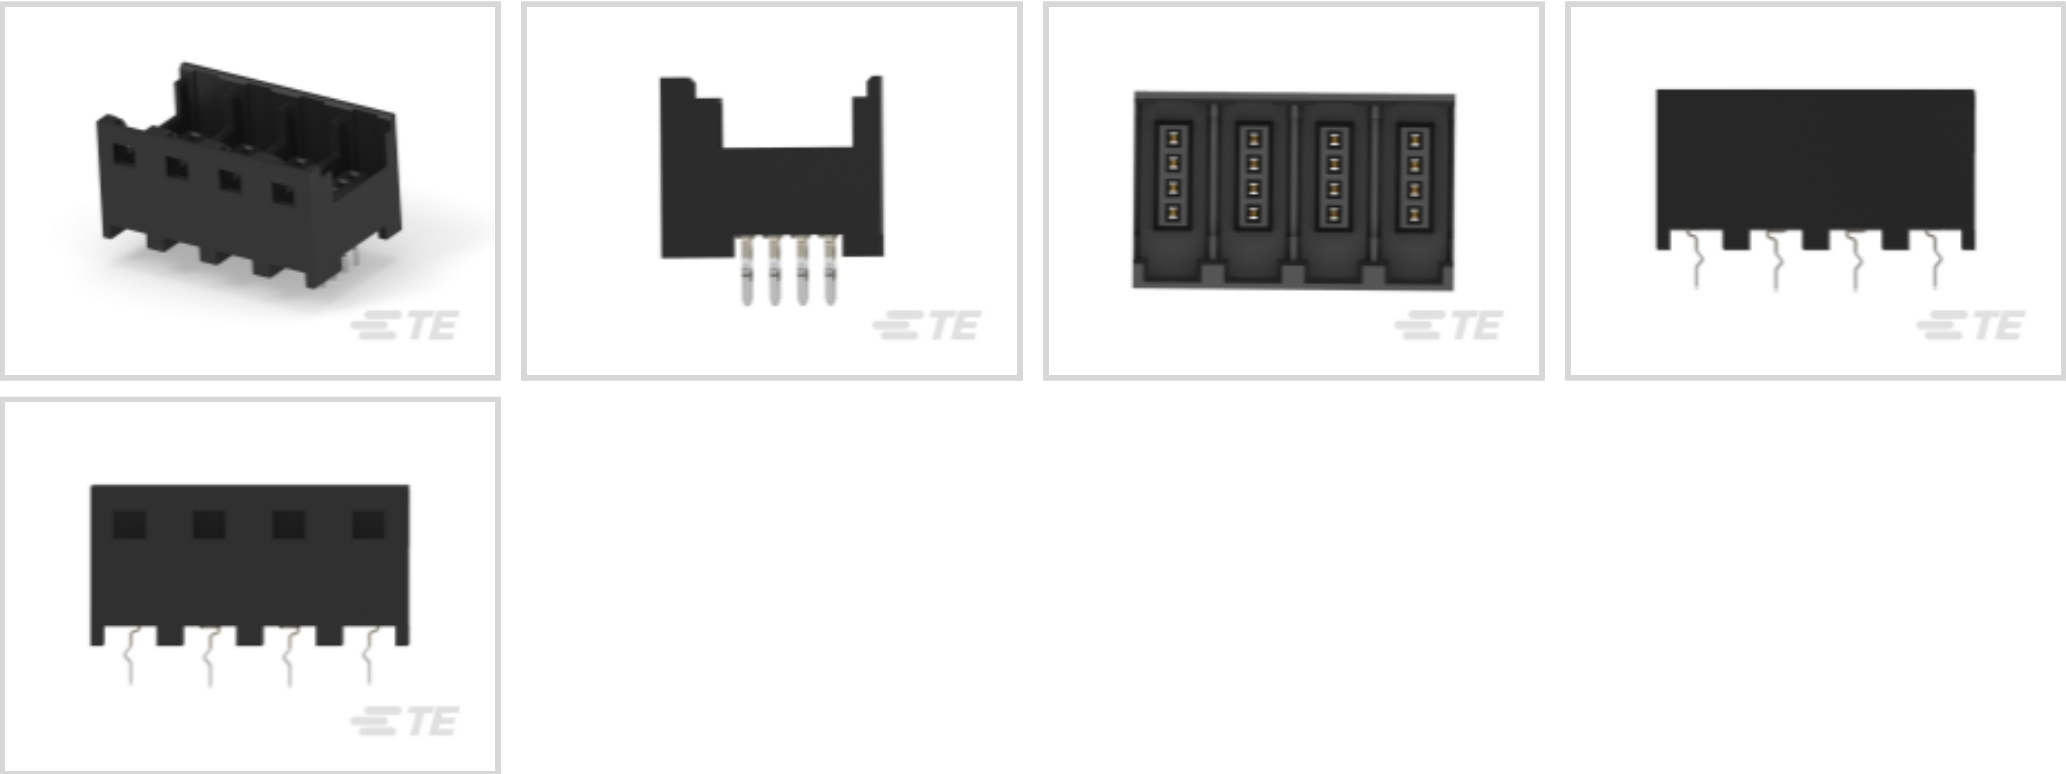

Connector System: **Wire-to-Board**

Number of Positions: **4**

Number of Rows: **4**

Centerline (Pitch): **6.5 mm [.255 in]**

PCB Mount Orientation: **Vertical**

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
Connector System	Wire-to-Board
Header Type	Partially Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header

Configuration Features

Number of Columns	4
Number of Loaded Positions	4
Connector Contact Load Condition	Fully Loaded
Number of Positions	4
Number of Rows	4
PCB Mount Orientation	Vertical



Electrical Characteristics

Operating Voltage	32 VDC
-------------------	--------

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Layout	Matrix
Contact Underplating Material Thickness	1.27 µm[50 µin]
Contact Mating Area Plating Material Thickness	.2 µm[7.87 µin]
Contact Mating Area Plating Material Finish	Bright
Contact Underplating Material	Nickel
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold
Contact Type	Pin
Contact Current Rating (Max)	3 A

Termination Features

Rectangular Termination Post & Tail Thickness	.2 mm[.007 in]
Rectangular Termination Post & Tail Width	.6 mm[.023 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Alignment Type	Polarization
Mating Retention	Without
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	Without

Housing Features

Housing Material	Thermoplastic
Centerline (Pitch)	6.5 mm[.255 in]

Dimensions

Connector Length	25.9 mm[1.019 in]
Connector Height	13 mm[.511 in]
Connector Width	15.8 mm[.622 in]



Usage Conditions

Operating Temperature (Max)	75 °C[167 °F]
Operating Temperature Range	-30 – 75 °C[-22 – 167 °F]

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	240
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1-1473562-4
RITS CONN. PLUG ASSY 4P RED

TE Part # 3-1473562-4
RITS CONN. PLUG ASSY 4P ORANGE

TE Part # 4-1473562-4
RITS CONN. PLUG ASSY 4P GREEN

TE Part # 2-1473562-4
RITS CONN. PLUG ASSY 4P BLUE

TE Part # 1473562-4
RITS CONN. PLUG ASSY 4P YELLOW

TE Part # 1-2295044-4
RITS CONN. PLUG ASSY 4P RED TIN

TE Part # 2-2295044-4
RITS CONN. PLUG ASSY 4P BLUE TIN

Also in the Series | RITS Header Connectors PCB Mount

PCB Headers & Receptacles(13)

Customers Also Bought

TE Part #1-178141-2
DYNAMIC CONN 6P V HDR ASSY

TE Part #1-179555-3
DYNAMIC D-3200 WTW TAB HSG 6P

TE Part #175286-2
DYNAMIC D-3 TAB CONT. L AU 0.38

TE Part #1-2176070-8
3521 51R 1% 2W

TE Part #4-647166-0
10P MTA100 HDR ASSY, SM, FL, LF

TE Part #1-794069-0
18P MINI UMNL HDR W/DH SN LF

TE Part #1473565-8
RITS CONN. HDR ASSY 8P

TE Part #770156-3
4P CMNL IDC PLUG 18AWG ORG V2



TE Part #1473565-4
[RITS CONN.HDR ASSY 4P](#)



TE Part #1473565-6
[RITS CONN.HDR ASSY 6P](#)

Documents

Product Drawings

[RITS CONN.HDR ASSY 4ROW 4P](#)

Japanese

CAD Files

Customer View Model

[ENG_CVM_CVM_1473567-4_D.2d_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_1473567-4_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1473567-4_D.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Remote Input Output Terminal System \(RITS\) Connectors](#)

English

Product Specifications

[Product Specification](#)

Japanese

Instruction Sheets

[Instruction Sheet \(non U.S.\)](#)

Japanese

[RITS Connector Interconnection System/e-CON Connector](#)

Japanese