

A

B

C

D







E

F

G

12345678910

MAPXMODIFICATIONDATE

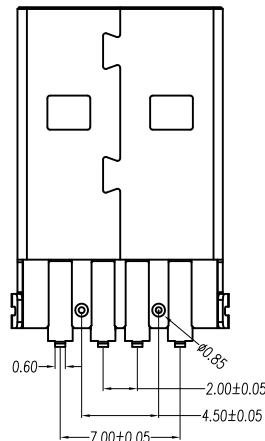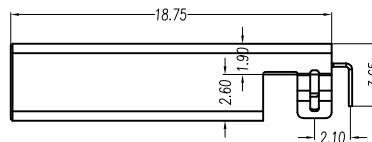

规格型号:Specifications:

电气特性:Electrical:

- 1.额定电流 : Current Rating
1.5A/contact terminal
- 2.额定电压 : Voltage Rating
30V DC
- 3.接触阻抗:Contact Resistance
30 milliohms MAX
- 4.耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Level
- 5.阻抗:Lnsulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 1.插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
- 2.端子保持力: Terminal Retenion
1.0kgf(MIN)

原材料:Matorial:

- 1.塑膠:Housing:
Hing Temperature Tnermaplastics,
PBT\LCP White/Black
- 2.端子:Contact:Copper Alloy C2680
- 3.外壳:Shell: Copper Alloy C2680/SPCC

- 1.端子:Contact: Piated Gold in Mating Area;
Tin On Solder Talls

端子四周镀50U”(MIN)锡,镀金区域镀100-200U”镀金1U”

- 2.外壳:Shell:
铜壳四周镀80U”(MIN)锡

Nickel Plating

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位	MM	制图	尹先华	制图料号	917-P81A101ED60200
比例	1:1	审核	郭治富	产品名称	AM90度沉板弯脚有孔铁壳带柱白胶24H
日期	2021-04-15	核准	黄国荣	角法	版本
DATE		APPD		VIEW	VER

12345678910