ITEM	PART#	DESCRIPTION	QTY	UOM
A	348033212	CTX64 RCPT TERM ST SN L DWIND MS GEN	1	PC

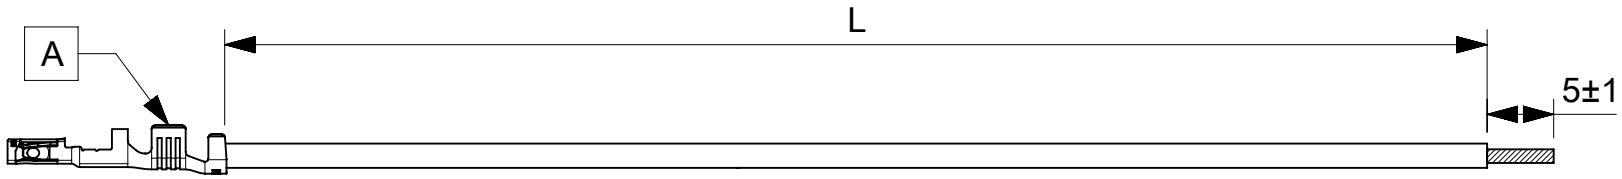

PART NUMBER	TITLE	CABLE DESCRIPTION	LENGTH 'L'	CABLE COLOR
2245722111	Stac64 F-S 75mm 0.50sq.mm Lead BK Sn	1CX0.5 SQMM DISC BK FLRYW125-B	75±3	BLACK
2245722112	Stac64 F-S 150mm 0.50sq.mm Lead BK Sn	1CX0.5 SQMM DISC BK FLRYW125-B	150±4	BLACK
2245722113	Stac64 F-S 225mm 0.50sq.mm Lead BK Sn	1CX0.5 SQMM DISC BK FLRYW125-B	225±4	BLACK
2245722114	Stac64 F-S 300mm 0.50sq.mm Lead BK Sn	1CX0.5 SQMM DISC BK FLRYW125-B	300±4	BLACK
2245722115	Stac64 F-S 450mm 0.50sq.mm Lead BK Sn	1CX0.5 SQMM DISC BK FLRYW125-B	450±4	BLACK

NOTES:
1. CRIMPING TO BE DONE AS PER MOLEX STANDARDS.
2. THE PRODUCT SPECIFICATION RELIES ON THE TERMINALS & WIRE SPEC.
3. FREE ENDS MUST BE STRIPPED,TWISTED & TINNED. THE LENGTH OF TINNING IS 5±1MM. TINNING DIAMETER MUST BE 1.2 MM MAX.
4. TINNING SHOULD BE DONE WITH LEAD FREE SOLDER BAR ONLY.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS: FA = 0, FC = 0, FP = 0
DIVISIONAL SYMBOLS

DIMENSION UNITS	SCALE
mm	NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	± °
4 PLACES	±
3 PLACES	±
2 PLACES	±
1 PLACE	±
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:

EC NO: 777016
DRWN: NAVEEB6 2024/02/13
CHK'D: SKUMAR07 2024/02/21
APPR: SKUMAR07 2024/02/21

INITIAL REVISION:
DRWN: MARUTG 2023/02/20
APPR: SKUMAR07 2023/03/16

molex

SEE TABLE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2245722111	PSD	000	B

THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	A4-SIZE	224572	SEE TABLE	GENERAL MARKET	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2024/02/21 07:52:48

FORMAT: master-tb-prod-A4
REVISION: J1
DATE: 2021/05/01