
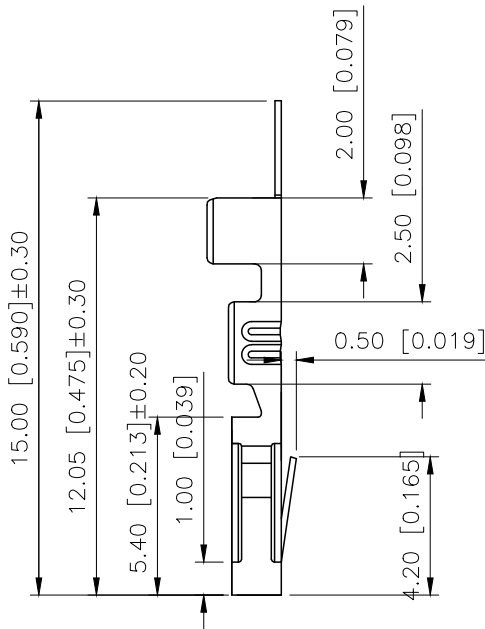


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面调整, 图面升级整理图面	2024.09.02	阿树

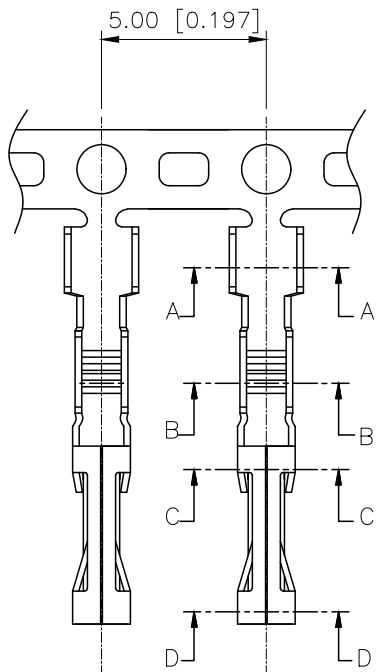

■SPECIFICATIONS


- Voltage rating:250V AC/DC
- Current rating:4A AC/DC
- Withstanding Voltage:1000V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ

PART NO.:


X2530 I F-P SN

① ②③ ④ ⑤


- ①Series No
②Category:T-Terminal
③Category:F-Female Terminal
④Material:P-Phosphor Bronze
⑤Plating:SN-Tin Plated




SEC:A-A

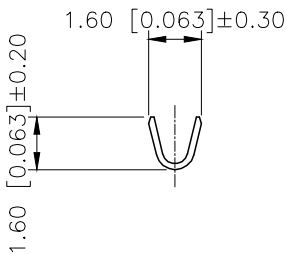


SEC:B-B

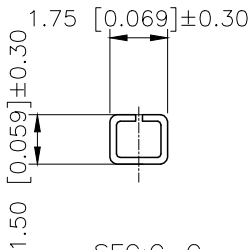

SEC:C-C

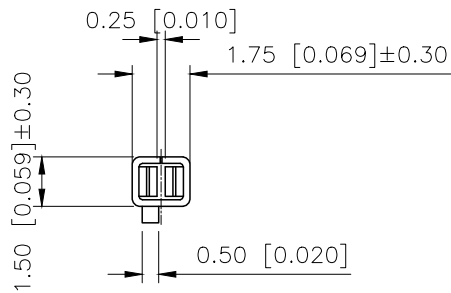

SEC:D-D

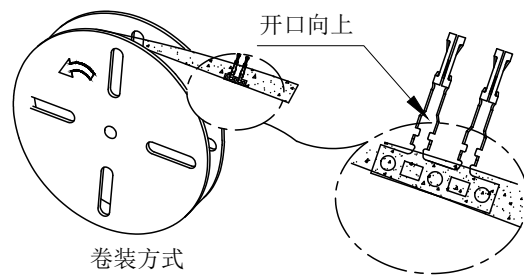

卷装方式

X2530TF-PSN	Phosphor Bronze	AWG#22~26 0.1~1.55mm	X2530H
PART NO	Material	Wire Range	Suitable XKB Housing

ANGULAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEWS	MODEL TYPE: 2.54mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X2530TF-PSN
APPROVED		SIZE: A4	DWG NO.: