

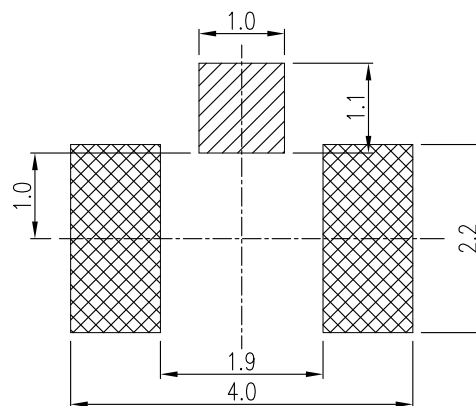


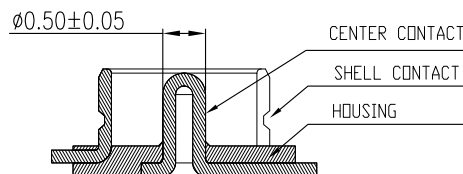


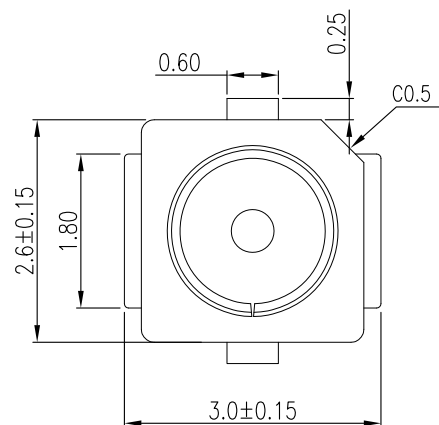

RECOMMENDED PCB LAYOUT
(TOLERANCE:±0.05)



NOTES :

1.0. RATING :

- 1.1. VOLTAGE :60 VAC (R.M.S.)
- 1.2. NOMINAL CHARACTERISTIC IMPEDANCE: 50 Ohm
- 1.3. APPLICABLE FREQUENCY: DC ~ 6GHz
- 1.4. VSWR: 1.3 MAX. (DC~3GHz), 1.5 MAX. (3~6GHz)
- 1.5. TEMPERATURE : -40°C TO +85°C
- 1.6. APPLIED TO IR SOLDERING PROCESS

2.0. MATERIAL SEE BILL OF MATERIAL :

- 2.1. HOUSING: LCP THERMOPLASTIC, UL94V-0, HALOGEN-FREE
- 2.2. CENTER CONTACT : C5191 COPPER ALLOY.
- 2.3. SHELL CONTACT: C5191 COPPER ALLOY.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: RF一代天线座	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCW10-RF3026-125B	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-21405151012	
			SHEET NO. 1 OF 1	