

2910330

<https://www.phoenixcontact.com/us/products/2910330>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



UL Recognized type 1 SPD and IEC type 2 surge protection plug with a varistor and thermal disconnect for use with VAL-US base elements, mechanical and visual fault warning

Product description

Surge protective device replacement plug

Your advantages

- Mechanical coding of all slots
- Pluggable
- Thermal disconnect device for each individual plug
- Secure hold of plugs in the event of high lightning current loads and strong vibrations thanks to new latching

Commercial data

Item number	2910330
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CL18
Product key	CL1151
Catalog page	Page 92 (C-4-2019)
GTIN	4055626445304
Weight per piece (including packing)	81.7 g
Weight per piece (excluding packing)	73 g
Customs tariff number	85363030
Country of origin	DE

VAL-US-120/65-P - Type 1 surge protection plug



2910330

<https://www.phoenixcontact.com/us/products/2910330>

Technical data

Notes

General	Used in:
---------	----------

Product properties

Product type	Replacement plug
Product family	VALVETRAB MS
IEC test classification	I / II
	T1 / T2
EN type	T1 / T2
Type	Male
Number of positions	1
Surge protection fault message	optical

Data management status

Article revision	00
------------------	----

Insulation characteristics

Overvoltage category	III
Pollution degree	2


Electrical properties

Nominal frequency f_N	50 Hz (60 Hz)
-------------------------	---------------

Connection data

Connection method	VALVETRAB plug-in system
-------------------	--------------------------

Dimensions

Dimensional drawing	
Width	17.5 mm
Height	47 mm
Depth	67.3 mm
Horizontal pitch	1 Div.

Material specifications

Color	black (RAL 9005)
Flammability rating according to UL 94	V-0
CTI value of material	600
Insulating material	PA 6.6/PBT
Material group	I

VAL-US-120/65-P - Type 1 surge protection plug



2910330

<https://www.phoenixcontact.com/us/products/2910330>

Housing material	PA 6.6
	PBT

Protective circuit

Mode of protection	L-N
	L-PEN
	N-PE
Direction of action	L-N / L-PEN
Nominal voltage U_N	120/208 V AC
	120/240 V AC
Nominal frequency f_N	50 Hz (60 Hz)
Maximum continuous voltage U_C	175 V AC
Residual current I_{PE}	$\leq 800 \mu A$
Standby power consumption P_C	$\leq 140.00 \text{ mVA}$
Nominal discharge current I_n (8/20) μs	12.5 kA
Maximum discharge current I_{max} (8/20) μs	65 kA
Short-circuit current rating I_{SCCR}	25 kA
Voltage protection level U_p	$\leq 0.8 \text{ kV}$
Residual voltage U_{res}	$\leq 0.8 \text{ kV}$ (at I_n)
	$\leq 0.7 \text{ kV}$ (at 10 kA)
	$\leq 0.6 \text{ kV}$ (at 5 kA)
	$\leq 0.5 \text{ kV}$ (at 3 kA)
TOV behavior at U_T	208 V AC (5 s / withstand mode)
	229 V AC (120 min / withstand mode)
Max. backup fuse with branch wiring	125 A (gG)

Additional technical data

Maximum discharge current I_{max} (8/20) μs	65 kA
--	-------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	$\leq 2000 \text{ m}$ (amsl)
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	30g (Half-sine / 11 ms / 3x $\pm X$, $\pm Y$, $\pm Z$)
Vibration (operation)	7.5g (10 ... 500 Hz / 2.5 h / X, Y, Z)

Approvals

UL specifications

Maximum continuous operating voltage MCOV	175 V AC
Short-circuit current rating (SCCR)	200 kA
Voltage protection rating VPR	700 V

VAL-US-120/65-P - Type 1 surge protection plug



2910330

<https://www.phoenixcontact.com/us/products/2910330>

UL type	type 1
Nominal discharge current I_n	20 kA
Maximum Surge Current per Phase	65 kA (acc. IEC61643-1)
	80 kA (acc. NEMA LS1)
Mode of protection	L-N
	L-G
	N-G
Nominal voltage	120/240 V AC
Power distribution system	Single phase
Nominal frequency	50/60 Hz
SPD Type	1CA

Standards and regulations

Air clearances and creepage distances

Standards/regulations	EN 60664-1 / EN 61643-11
Standards/specifications	IEC 61643-11
Note	2011
Standards/specifications	EN 61643-11
Note	2012

Mounting

Mounting type	on base element
---------------	-----------------

VAL-US-120/65-P - Type 1 surge protection plug


2910330

<https://www.phoenixcontact.com/us/products/2910330>



Drawings

Dimensional drawing

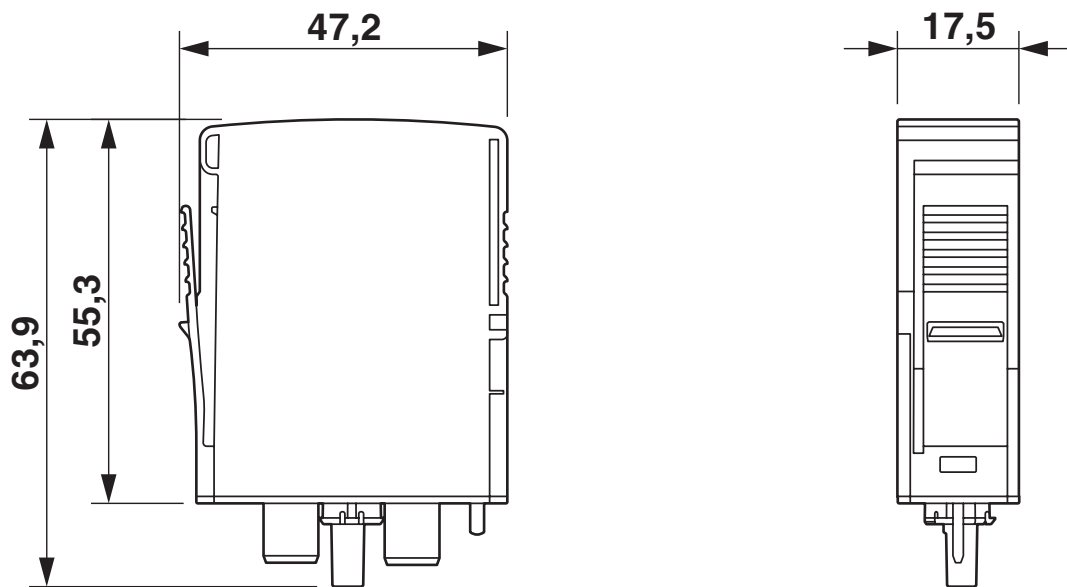

Circuit diagram



VAL-US-120/65-P - Type 1 surge protection plug



2910330

<https://www.phoenixcontact.com/us/products/2910330>

Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2910330>



cUL Recognized
Approval ID: FILE E 330181



UL Recognized
Approval ID: FILE E 330181

cULus Recognized

VAL-US-120/65-P - Type 1 surge protection plug



2910330

<https://www.phoenixcontact.com/us/products/2910330>

Classifications

ECLASS

ECLASS-11.0	27130890
ECLASS-13.0	27171292

ETIM

ETIM 9.0	EC002496
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

VAL-US-120/65-P - Type 1 surge protection plug



2910330

<https://www.phoenixcontact.com/us/products/2910330>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

VAL-US-120/65-P - Type 1 surge protection plug



2910330

<https://www.phoenixcontact.com/us/products/2910330>

Accessories

VAL-US-120/65/1+0-FM - Type 1 surge protection device

2910355

<https://www.phoenixcontact.com/us/products/2910355>



Surge protective device, single channel with remote indicator contact for 120 V AC

VAL-US-120/65/1+1-FM - Type 1 surge protection device

2910356

<https://www.phoenixcontact.com/us/products/2910356>



Surge protective device, two channel with remote indicator contact for 120 V AC, 2-wire plus ground.

VAL-US-120/65-P - Type 1 surge protection plug

2910330

<https://www.phoenixcontact.com/us/products/2910330>



VAL-US-120/65/2+0-FM - Type 1 surge protection device

2910357

<https://www.phoenixcontact.com/us/products/2910357>



Surge protective device, two channel with remote indicator contact for 120/240 V split phase AC, 3-wire.

VAL-US-120/65/2+1-FM - Type 1 surge protection device

2910358

<https://www.phoenixcontact.com/us/products/2910358>



Surge protective device, three channel with remote indicator contact for 120/240 V split phase AC, 3-wire plus ground.

VAL-US-120/65-P - Type 1 surge protection plug

2910330

<https://www.phoenixcontact.com/us/products/2910330>



VAL-US-120/65/3+0-FM - Type 1 surge protection device

2910359

<https://www.phoenixcontact.com/us/products/2910359>



Surge protective device, three-channel with remote indicator contact for 120/240 V split-phase or 120/208 V Wye three-phase AC, 4-wire.

VAL-US-120/65/3+1-FM - Type 1 surge protection device

2910360

<https://www.phoenixcontact.com/us/products/2910360>



Surge protective device, four channel with remote indicator contact for 120/208 V Wye three phase AC, 4-wire plus ground.

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com