



R7F7010183AFP

The in-vehicle high-end microcomputer which was the best for body application and had the lineup which can respond to a variety of Systems


OVERVIEW

The RH850/F1L is a product line in Renesas' RH850/F1x series of single chip microcontrollers designed for automotive body applications. The embedded flash memory will range from 256 KB to 2 MB and packages will be covered from small package 48 pin to 176 pin.

Product Status: Product Inquiry

Family: RH850 Series: RH850/F1x Group: RH850/F1L

BLOCK DIAGRAM

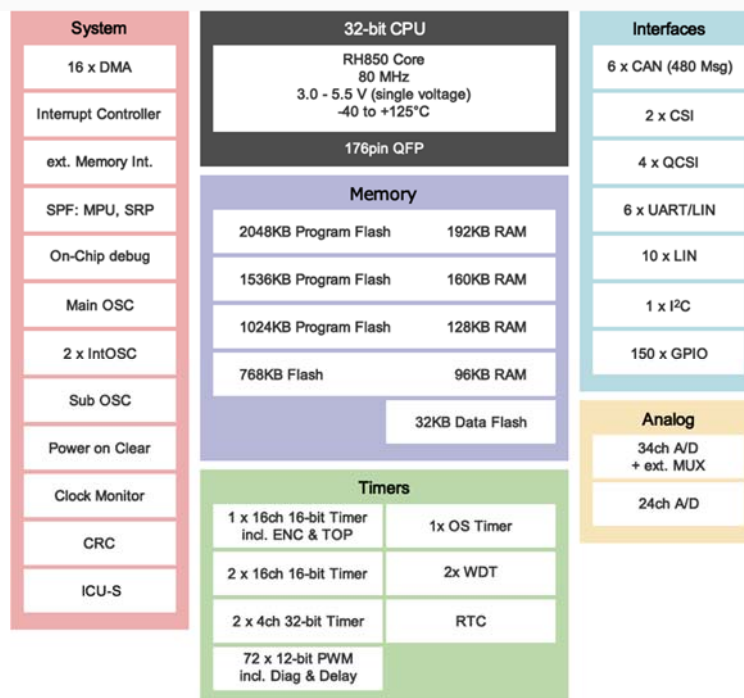

PARAMETRICS

Parameters	R7F7010183AFP
Memory	
Program memory	512 KB Flash memory
RAM	64 KB
Data Flash	32 KB
CPU (Bit, Clock, DMA, External Bus etc)	
CPU	RH850G3K (32-bit)
Max. Frequency	80 MHz
On-chip Oscillator Freq.	8 MHz, Low Speed: 240 kHz
PLL	YES
Power-On Reset	YES
Low Voltage Detection	YES
DMA Remarks	DMAC x 16ch
External Interrupt Pins	12
I/O Ports	65
Timers	
16-bit Timers	16 ch
32-bit Timers	4 ch
Watchdog Timers	2 ch
Other Timers	Timer for OS x 1 ch
PWM Output	24
Analog	
A/D Converters	10-bit x 14 ch, 12-bit x 11 ch
Interfaces	
CAN	3 ch
CSIs	1 ch
SPIs	3 ch
UARTs	3 ch
I2Cs	1 ch
LIN	5 ch
Serial Interface Remarks	UART: RLIN3, LIN: RLIN3 + RLIN2
Operating Conditions	
Operating Voltage	to 5.5 V
Operating Temperature	-40 to 105 °C (Ambient Temperature)
Remarks	
Remarks	80-pin 32-bit microcontroller with low power RH850G3K core suitable for car body control (R850/F1L)