
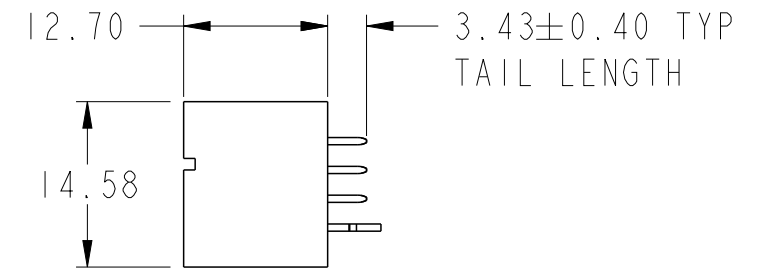
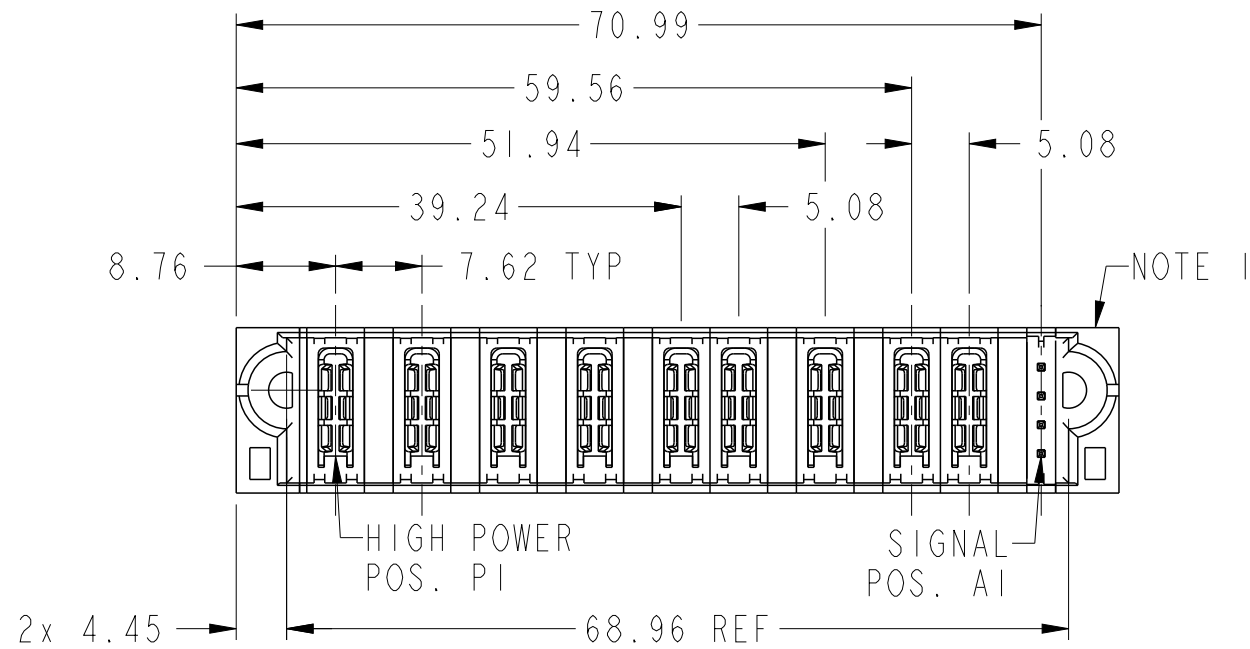
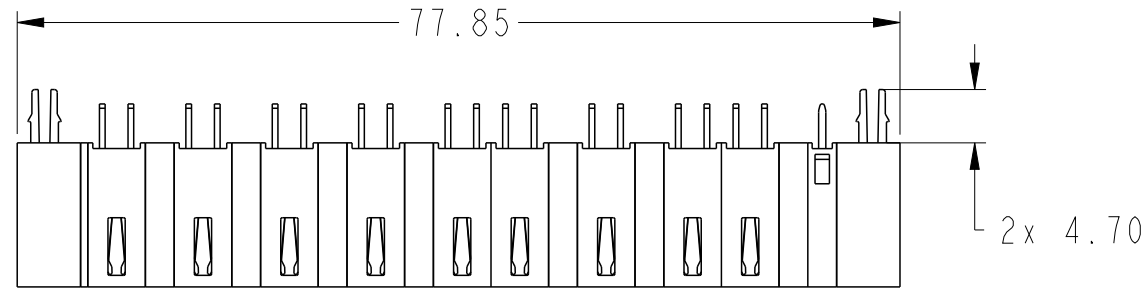



PART NUMBER SEE SHEET 2

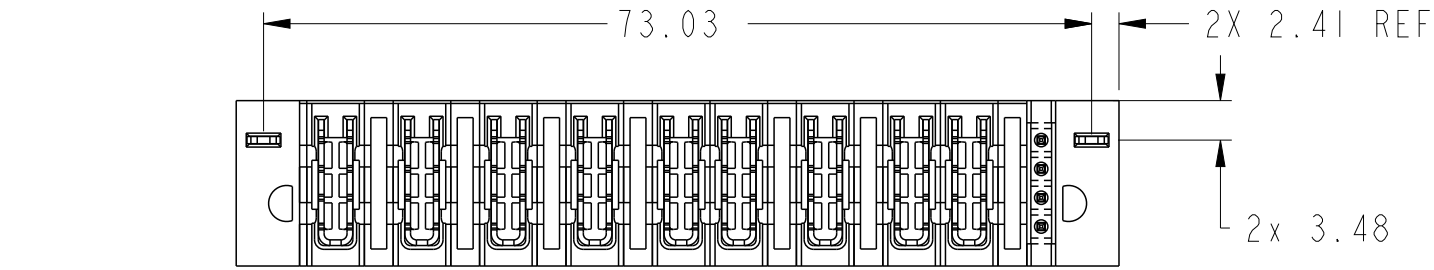

spec ref *				dr	Rainbow Zhan	2016/06/17	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	3:2							
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Rainbow Zhan	2016/06/28			ecn no -										
ASME Y14.5				chr	Fancy Zhang	2016/06/28			rel level Released										
				appr	Pei-Ming Zheng	2016/06/28			product family PwrBlade+										
surface	linear	0.X	±0.5	<div>Amphenol FCI</div> <div>9HP + 4S</div> <div>VERTICAL STB PLUG</div>				dwg no	10106266-9001001				rev	A					
ASME Y14.5		0.XX	±0.25																
		0.XXX	±0.10																
	angular	0°	±2°	www.fci.com				cat. no.				Product - Customer Drw				sheet 1 of 3			

PRODUCT NO.	ROWS	HIGH POWER												S	
		E1	P1	P2	P3	P4	P5	P6	P7	P8	P9	1	E2		
10106266-9001001LF	DCBA														

CODE	DESCRIPTION
E	MFBL SIGNAL CONTACT
HI	STD HIGH POWER CONTACT
HA	METAL HOLD DOWN

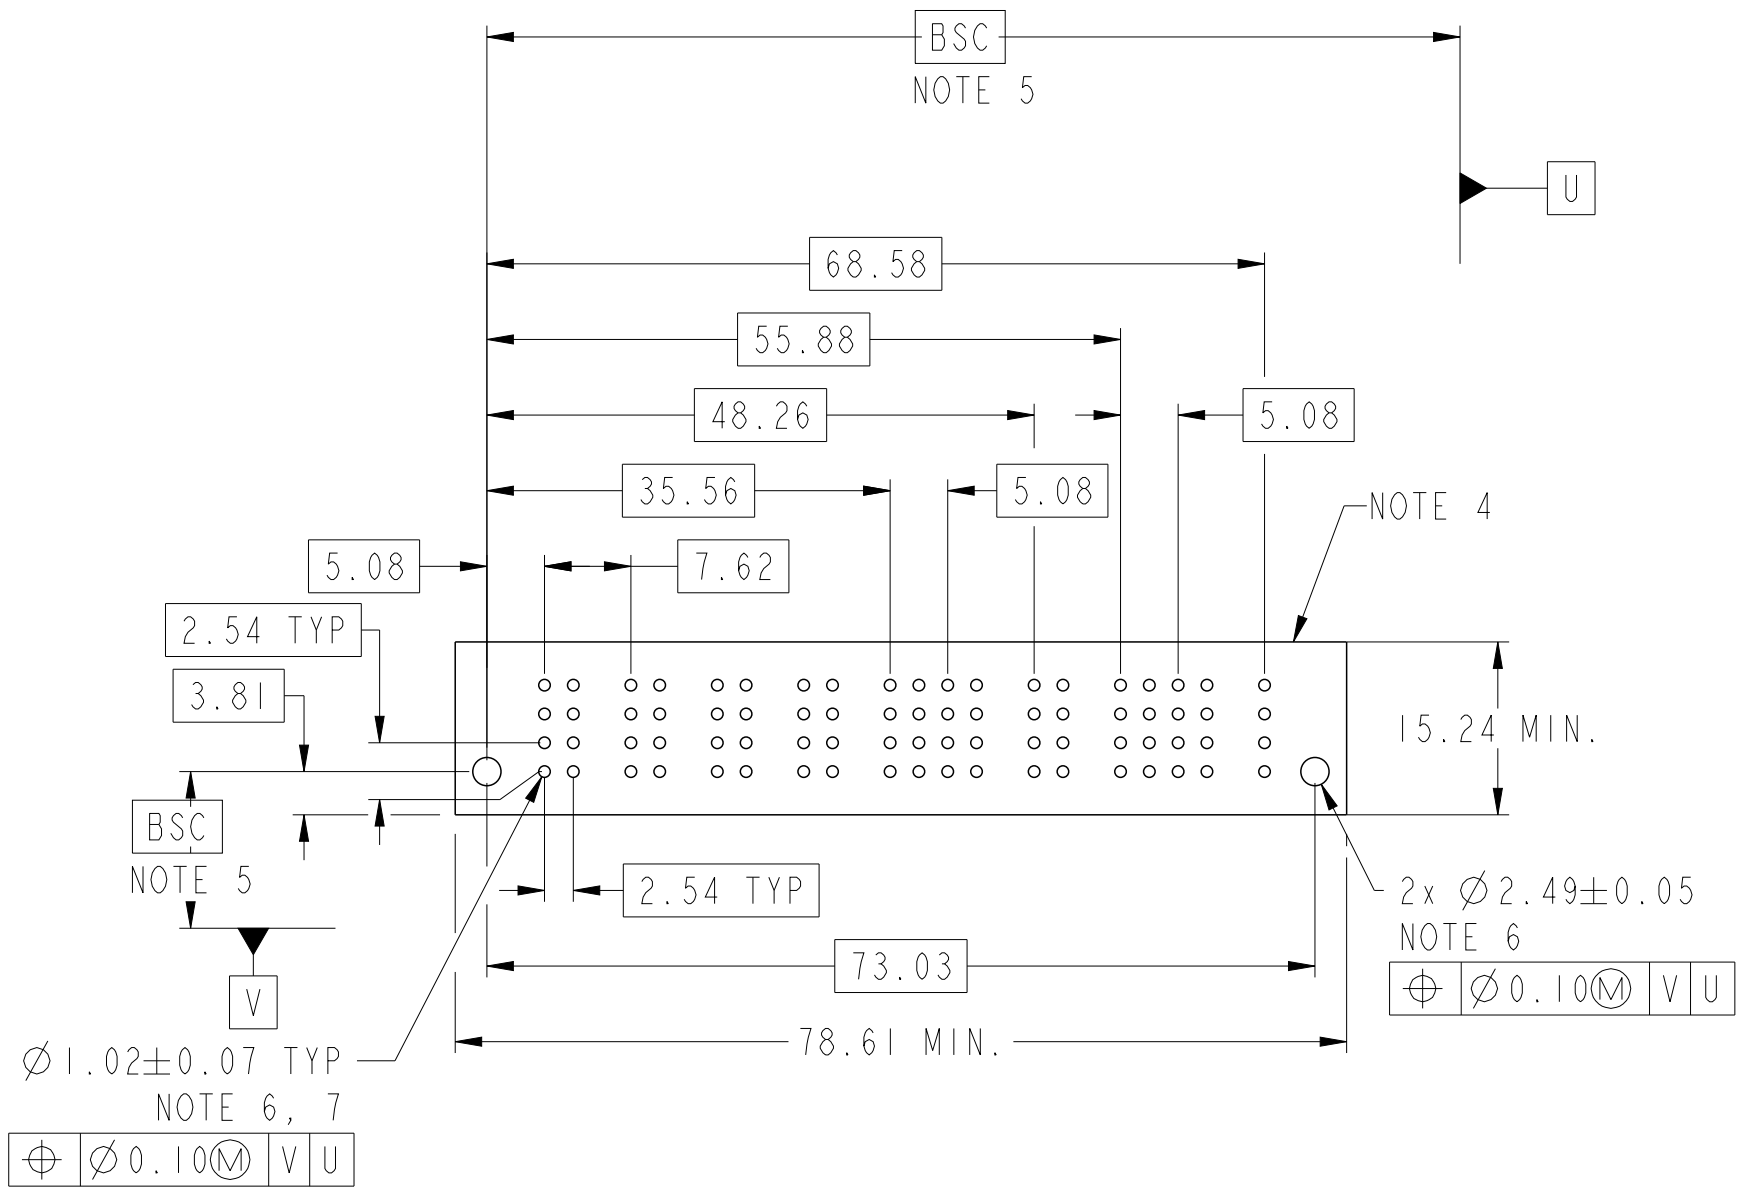

spec ref *				dr Rainbow Zhan		2016/06/17		<div>projection</div> <div></div>	<div>MM</div> <div></div>	size A3	scale 3:2
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng Rainbow Zhan		2016/06/28				ecn no -	
ASME Y14.5				chr Fancy Zhang		2016/06/28					
				appr Pei-Ming Zheng		2016/06/28		product family PwrBlade+		rel level Released	
<div>surface</div> <div></div> <div>ASME Y14.5</div>	linear	0.X	±0.5	<div>Amphenol</div> <div>FCi</div>	title 9HP + 4S				dwg no 10106266-9001001		rev A
		0.XX	±0.25								
			0.XXX		±0.10	VERTICAL STB PLUG					
				www.fci.com		cat. no.		Product - Customer Drw			sheet 2 of 3

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.  
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:  
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.  
-SIGNAL CONTACT - COPPER ALLOY.  
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn  
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.  
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.  
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.

spec ref *				dr	Rainbow Zhan	2016/06/17	projection 	MM 	size	A3	scale	3:2	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Rainbow Zhan	2016/06/28			ecn no -				
ASME Y14.5				chr	Fancy Zhang	2016/06/28			rel level Released				
				appr	Pei-Ming Zheng	2016/06/28	product family		PwrBlade+				
surface 	linear	0.X	±0.5	Amphenol FCi	title	9HP + 4S VERTICAL STB PLUG			dwg no	10106266-9001001		rev	A
		0.XX	±0.25										
		0.XXX	±0.10										
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.		Product - Customer Drw				sheet 3 of 3		