


9001 Series

DIN41612 Half C , 1/3C Type Female

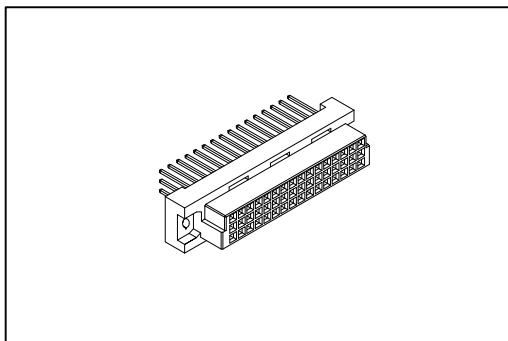

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 A.

Dielectric Withstanding Voltage: AC 1000V.

Insulator Resistance: 1000MΩ min.

Contact Resistance: 20mΩ max.


Operating Temperature: -55°C +125°C.

Features:


* Mates with Male 3Row

9001-15 Half C Type 48/32/24/16/8P, 1/3C Type 30/20/15/10/5P



9001-17 Half R Type 48/32/24/16/8P, 1/3R Type 30/20/15/10/5P

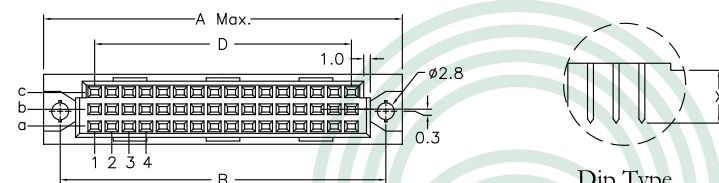

Dip Type



Press Fit Type

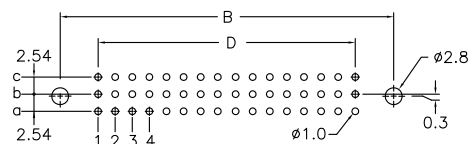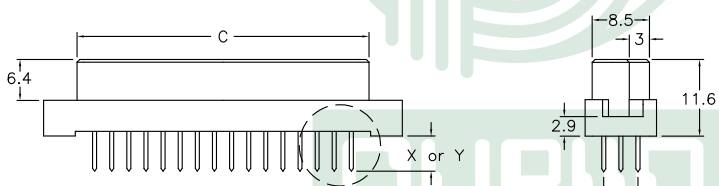

P.C. Board Layout

Length	1	2	W1	W2
X	4.0	2.5	13	17
Y	4.6	6.3	13	17

Position	A	B	C	D
48/32/24/16/8	55.0	49.36	44.40	38.10
30/20/15/10/5	39.8	34.12	29.20	22.86

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	48	a b c	C-+--- b-+--- a-+--- 1 2 3 4
	32	a - c	C-+--- b-+--- a-+--- 1 2 3 4
	30	a b c	C-+--- b-+--- a-+--- 1 2 3 4
	20	a - c	C-+--- b-+--- a-+--- 1 2 3 4
	16	a - -	C-+--- b-+--- a-+--- 1 2 3 4
	10	a - -	C-+--- b-+--- a-+--- 1 2 3 4
5.08mm	24	a b c	C-+--- b-+--- a-+--- 1 2 3 4
	16	a - c	C-+--- b-+--- a-+--- 1 2 3 4
	15	a b c	C-+--- b-+--- a-+--- 1 2 3 4
	10	a - c	C-+--- b-+--- a-+--- 1 2 3 4
	8	a - -	C-+--- b-+--- a-+--- 1 2 3 4
	5	a - -	C-+--- b-+--- a-+--- 1 2 3 4

Ordering information


9001-	1	6	48	1	C	*00	P	L1	A
Series	1: 2.54mm 2: 5.08mm	6: Female	Position	1: Dip Length 2: Dip Length W1: Dip Length W2: Dip Length	C: Selective Gold Plated	00: G/F	Blank: Dip P: Press Fit	Blank: W/O Lock L1: With Lock See Page CC02	A: Tray Package

*Additional plating options available


9001 Series

DIN41612 Mating Introduce


2 Row insulator
B (Standard mounting)
Mounting axis
of the connector

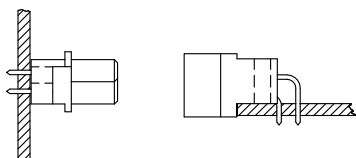


3 Row insulator
C (Standard mounting)
Mounting axis
of the connector




Board lock available
L1=P.C.B. Thickness 1.6 ~2.0 mm
L2=P.C.B. Thickness 2.8 ~3.2 mm




Q (Reverse mounting)
Mounting axis
of the connector

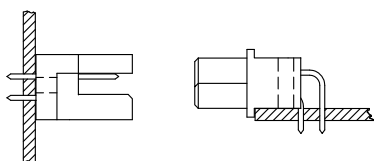

R (Reverse mounting)
Mounting axis
of the connector




Board lock available
L1=P.C.B. Thickness 1.6 ~2.0 mm
L2=P.C.B. Thickness 2.8 ~3.2 mm

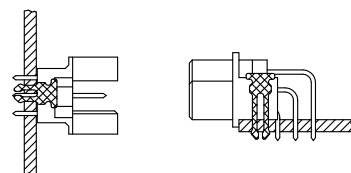


I.D.C. Type Ribbon Cable



2 Row insulator



3 Row insulator



Press Fit Type
2 Row insulator



3 Row insulator

