

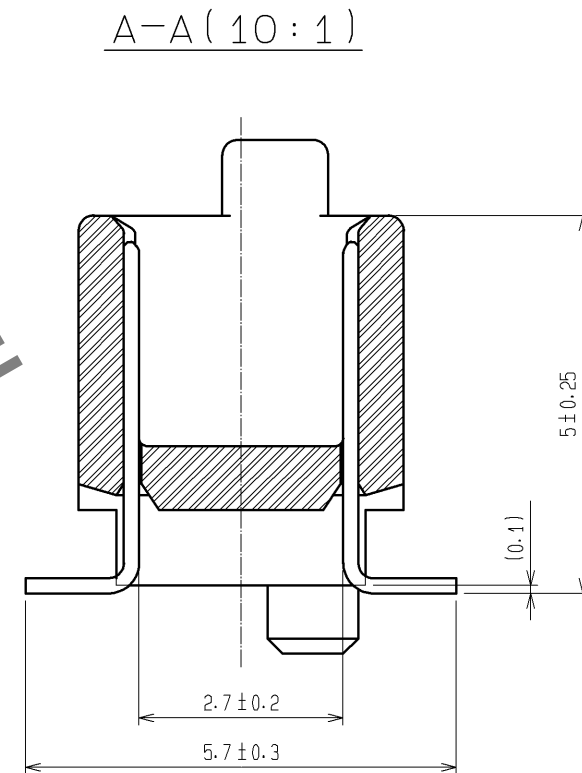
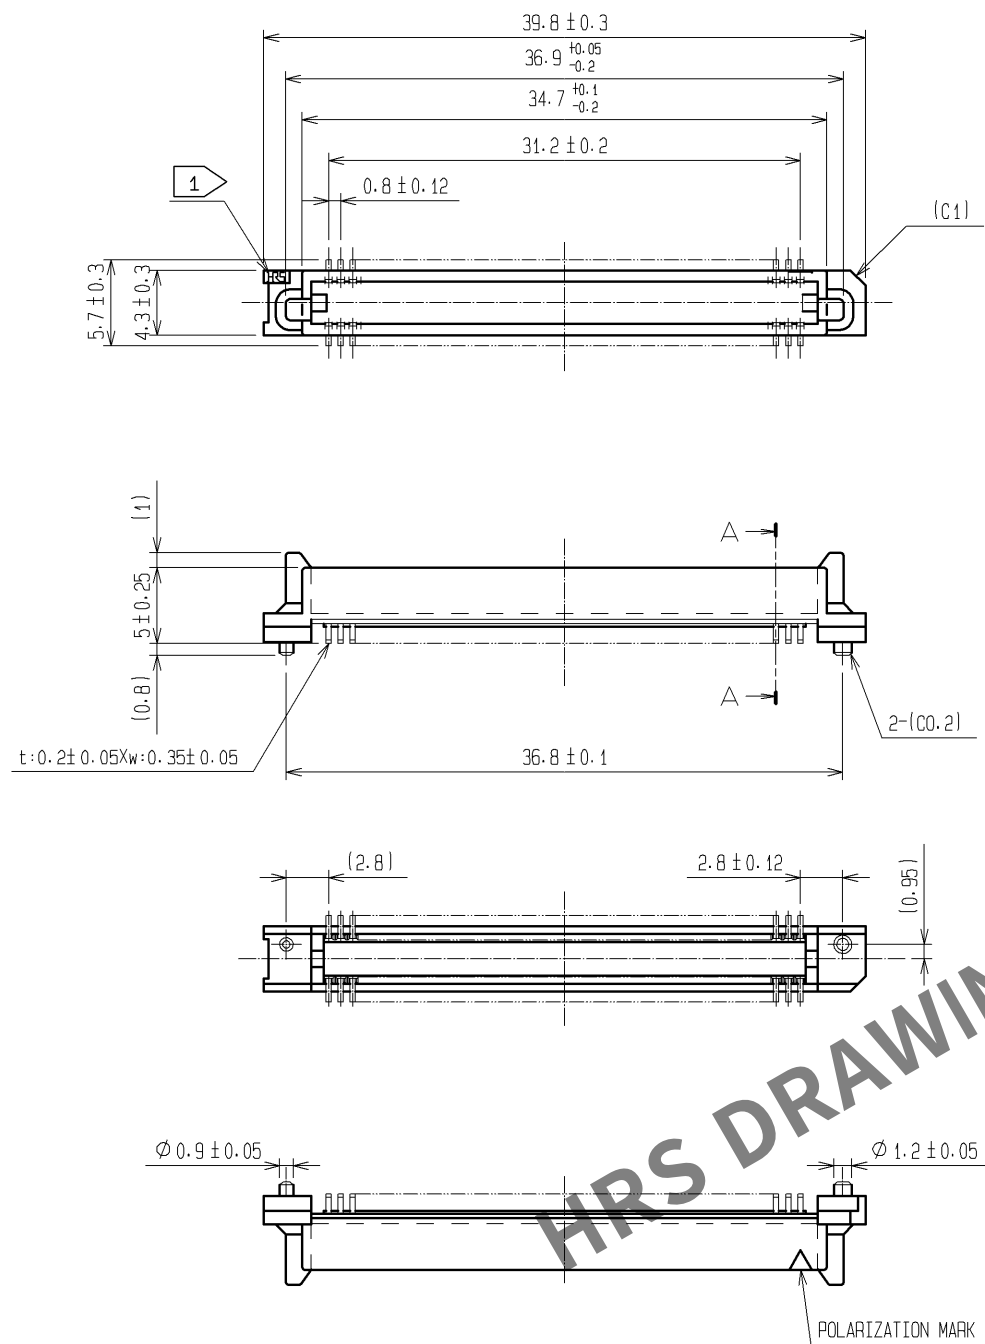


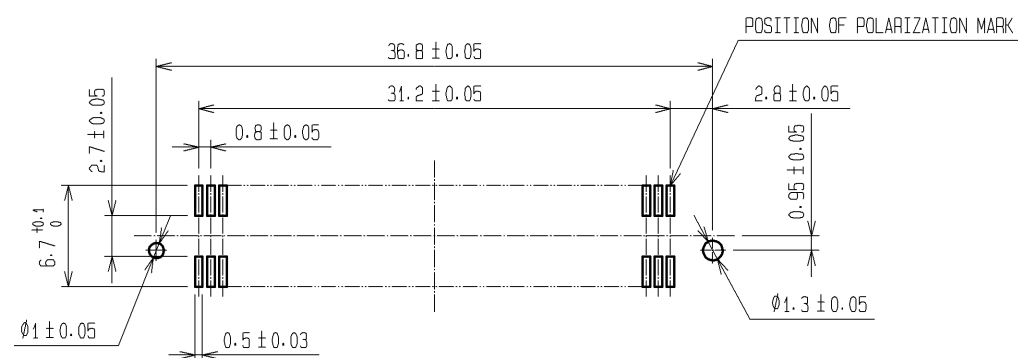

- NOTE 1 HRS MARK SHALL BE OPTIONAL.
- 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
- 3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.
- 4 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
- 5 FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE
ADDED ACCORDING TO CIRCUMSTANCES.
- 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

RECOMMENDED LAND PATTERN DIMENSION OF PCB(MOUNTING SIDE)



1	PPS	LIGHT BROWN (UL94V-0)		2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.	
						LEAD AREA:TIN-PLATING 1μm min.	
						UNDER PLATING:NICKEL 1μm min.	
NO.		MATERIAL		FINISH . REMARKS			
UNITS mm		 SCALE 2 : 1		 COUNT		DESCRIPTION OF REVISIONS	
						DESIGNED	
						CHECKED	
						DATE	
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		07. 06. 20		DRAWING NO. EDC3-084972-23	
		CHECKED : HS. OZAWA		07. 06. 20		PART NO. FX6-80P-0.8SV1(93)	
		DESIGNED : KT. DOI		07. 06. 20		CODE NO. CL576-0027-7-93	
		DRAWN : TS. MIYAKI		07. 06. 15		 	

