


Actuator

704.209.4

Distribution by
DigiKey

DigiKey

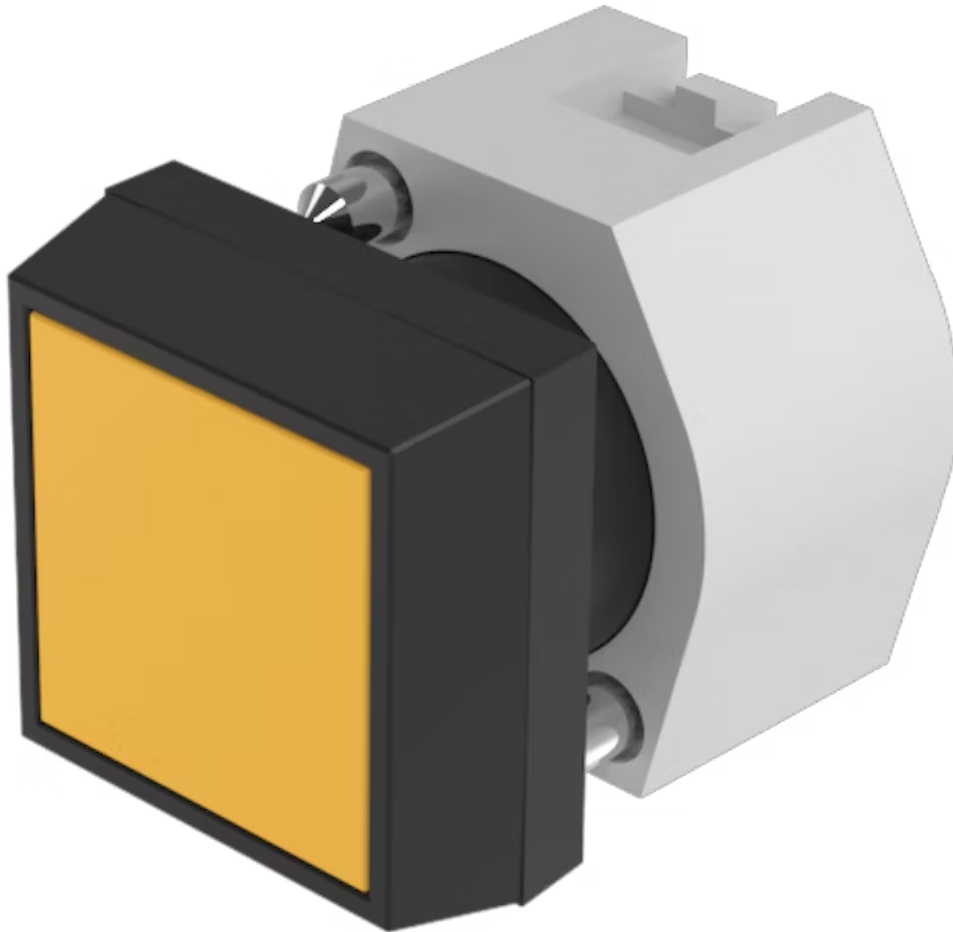

<https://digikey.eao.com/p/704.209.4>

Your product:



704.209.4 Actuator

FRONT

Front form:	square
Front bezel material:	Plastic
Front dimension:	30 mm x 30 mm
Front bezel colour:	Black

MOUNTING

Design:	raised
---------	--------

OPERATING-/INDICATION PART

Lens optics:	transparent
Lens illumination:	non illuminative
Lens shape:	flush
Lens material:	Plastic
Lens colour:	Yellow

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
------------	---

MECHANICAL CHARACTERISTIC

Switching action:	Momentary
Operating force:	6.2 N
Operating Travel:	ca. 5.8 mm ± 0.2 mm

Weight: 0.04 kg

Mechanical lifetime: ≤3 Mio. cycles of operation

AMBIENT CONDITION

Storage temperature: – 40 °C ... + 85 °C

IP Protection: IP65 front side

Operating temperature: – 40 °C ... + 55 °C

OTHER

max. number of switching elements: 3


Short Description: Actuator, 30 mm x 30 mm, flush, non illuminative, Yellow, Plastic, transparent, square, Black, Plastic, Momentary

Housing material: Plastic


Hints: Frontring with protective cover to be mounted with a torque of 0.4 Nm onto actuator, Max. 3 switching elements can be clipped on

Housing colour: Black

Wiring diagrams:

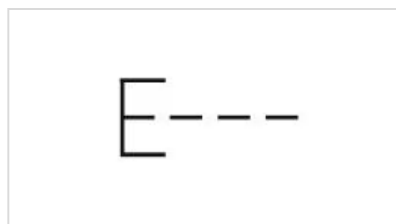


Mounting cut-outs:

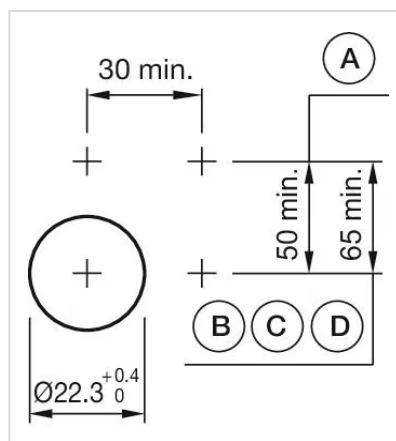

A = Screw terminal
B = Push-in terminal (PIT)
C = Plug-in terminal 6.3 mm x 0.8 mm
D = Double plug-in terminal 6.3 mm x 0.8 mm

Dimension drawings:

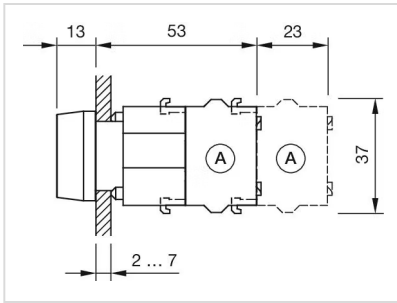

A = Screw terminal