
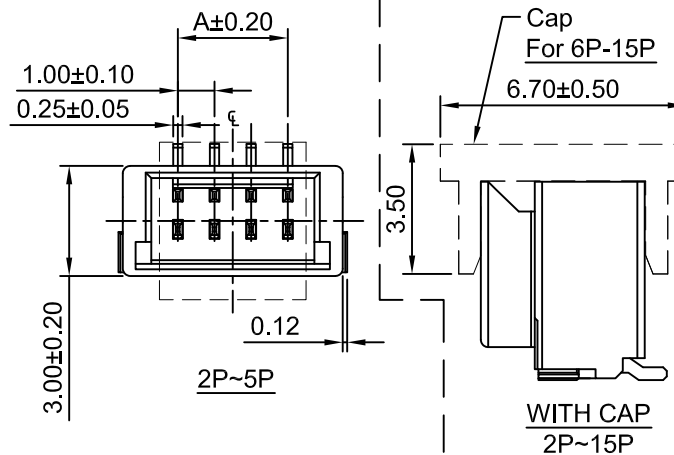


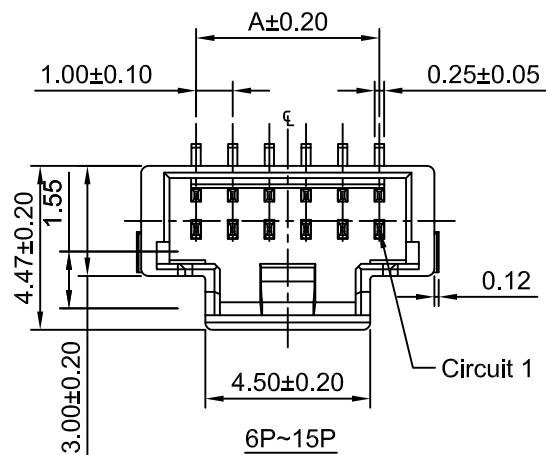

Ordering Information:

A1008WV-S-XP - *** - ***

1 2 3

1.Part NO.

2.Pin Finish:

(Blank): Tin over Nickel

G: Gold over Nickel(Au:1μin[0.03μm] Min)

G3: Gold over Nickel(Au:3μin[0.08μm] Min,Mating Area)

G15: Gold over Nickel(Au:15μin[0.38μm] Min,Mating Area)

G30: Gold over Nickel(Au:30μin[0.76μm] Min,Mating Area)

3.Packing:

(Blank): 2P~6P CAP 7P~15P Mylar

CRE: 7P~15P CAP

SPECIFICATIONS:

Current rating: 1A AC,DC

Voltage rating: 100V AC,DC

Temperature range: -40°C ~ +105°C

Contact resistance: 20mΩ Max.

Insulation resistance: 500MΩ Min.

Withstanding voltage: 500V AC/minute






Pin Material: Phosphor Bronze

Solder Tabs: Phosphor Bronze/Tin over Nickel



Material: Nylon 9T,UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1008WV-S-2P	1.00	4.00
A1008WV-S-3P	2.00	5.00
A1008WV-S-4P	3.00	6.00
A1008WV-S-5P	4.00	7.00
A1008WV-S-6P	5.00	8.00
A1008WV-S-7P	6.00	9.00
A1008WV-S-8P	7.00	10.00
A1008WV-S-9P	8.00	11.00
A1008WV-S-10P	9.00	12.00
A1008WV-S-11P	10.00	13.00
A1008WV-S-12P	11.00	14.00
A1008WV-S-13P	12.00	15.00
A1008WV-S-14P	13.00	16.00
A1008WV-S-15P	14.00	17.00

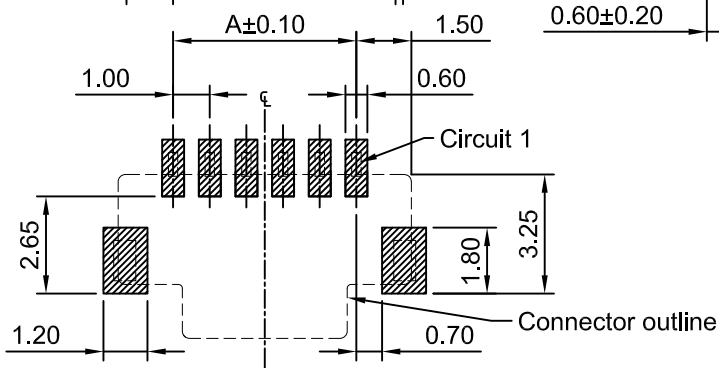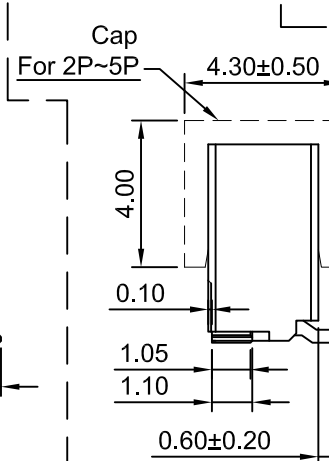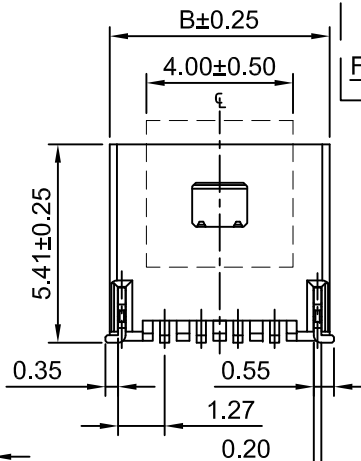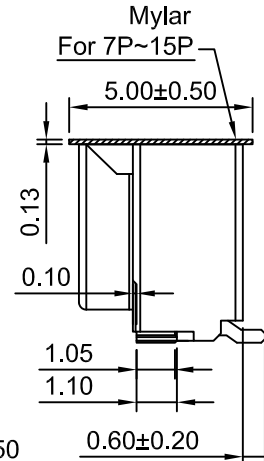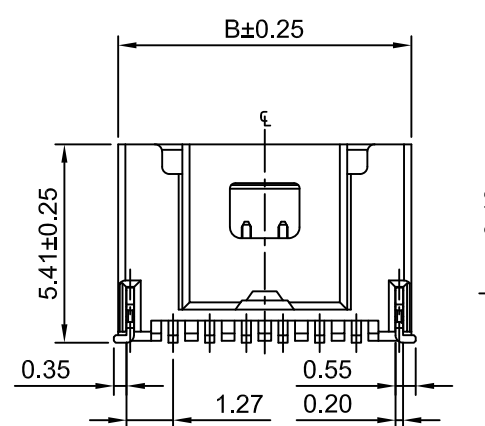

P.C.B LAYOUT (TOP VIEW)
TOLERANCE:±0.05



CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 1.00mm PITCH VERTICAL SINGLE ROW WAFER -SMD TYPE	
mm	5:1	1 of 1		
DRAWN	CHK'D	APPR		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A1008WV-S-XP	REV A3
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				